


STRAIGHT LIVE TOOL OUTPUT: ER32 GEAR: 1/1

MAX RPM: 6000 RPM

COOLANT: EXTERNAL & INTERNAL (MAX 7MP)

\*\*DO NOT RUN WITHOUT COOLANT\*\*

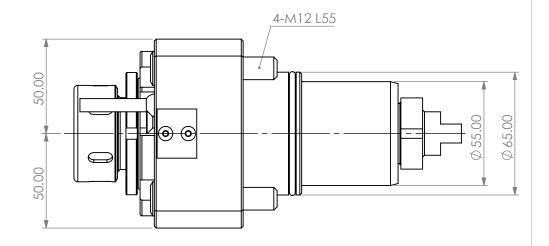

ITEM	PART NO.	DESC.	QTY.			
1	NA32	Bearing collet nut ER32	1			
2	FK-8	Nut wrench	1			
3	FK-9	Spindle wrench	1			
4	NK103-10140	Coolant Nozzle	1			
5						

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
LYNDEX NIKKEN. ANY REPRODUCTION
IN PART OR AS A WHOLE WITHOUT THE
WRITTEN PERMISSION OF LYNDEX NIKKEN
IS PROHISITED. DRAWING SUBJECT TO
CHANGE WITHOUT NOTICE.

	NAME	DATE	STF	STRAIGHT LIVE TOOL ER32 OUTPUT			
DRAWN	ВТ	1/5/2021		LYNDE			
NOTES:			NIKKEN				
		SIZE	DWG. NO. NK105-4900	G. NO. NK105-49000			
			SCALE 1:2 SHEET 1 OF 1				

5 4 3