


Material: H11 High Alloy Steel
 Hardness: 52 HRC tempered
 Concentricity: 1 to 2 μm between the internal and external diameter
 Cooling: Central
 Features: h6 tolerance on all the extension cylindrical length
 Application: Small-sized for difficult machining access
 Supplied without stop screws



3° SLIM STYLE (LIGHT DUTY)

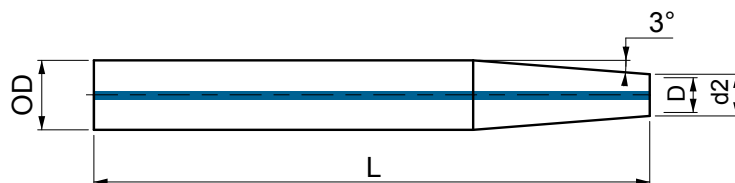

INCH

Part Number	OD	D	d2	L
ST62-SF0125-6.30	5/8"	1/8"	0.31"	6.30"
ST62-SF0187-6.30	5/8"	3/16"	0.31"	6.30"
ST62-SF0250-6.30	5/8"	1/4"	0.47"	6.30"
ST75-SF0250-6.30	3/4"	1/4"	0.47"	6.30"
ST75-SF0312-6.30	3/4"	5/16"	0.63"	6.30"
ST75-SF0375-6.30	3/4"	3/8"	0.63"	6.30"
ST75-SF0500-6.30	3/4"	1/2"	0.71"	6.30"

METRIC

Part Number	OD	D	d2	L
ST16M-SF3-160	16mm	3	8	160
ST16M-SF4-160	16mm	4	8	160
ST16M-SF5-160	16mm	5	9	160
ST16M-SF6-160	16mm	6	12	160
ST20M-SF6-160	20mm	6	12	160
ST20M-SF8-160	20mm	8	16	160
ST20M-SF10-160	20mm	10	16	160
ST20M-SF12-160	20mm	12	18	160