



**MCR
SAFETY**

4850K

Gloves for Glory

Welder

Specification Sheet

PRODUCT DESCRIPTION:

This Memphis Gloves for Glory® option is made of Premium grain goatskin. This supple leather contains natural lanolin that helps create a very soft feel. Characteristics include strongest tensile strength and excellent tactile sensitivity. Best combination of flexibility and comfort. The 4850K MIG/TIG glove is lined with 100% Dupont™ Kevlar® and has a 4.5" blue split cow leather cuff. It is also sewn with Kevlar® thread.

FEATURES:

- Premium Top Grain Goatskin
- Lined and Sewn with DuPont(tm) Kevlar® fibers
- Greater softness for sense of touch
- 4.5" blue split cow leather cuff
- MIG/TIG

APPLICATIONS:

Ship building, Mig/Tig, Welding, Construction, Metal fabrication, Millwright operations , Automotive Assembly



TECHNICAL DATA FOR: 4850KS

Series	Gloves for Glory	EN 388 : CE Score - Abrasion	2
Material Group	Leather	EN 388 : CE Score - Cut	2
Product Type	Welder	EN 388 : CE Score - Tear	2
Glove Size	Small	EN 388 : CE Score - Puncture	2
Gauge	13 Gauge		
Material	Leather		
Leather Cut	Grain		
Leather Type	Goat Skin		
Grade	Premium		
Features	Sewn With KEVLAR		
Insulated	Insulated		
Lining	Kevlar		
Pattern	Gunn		
Thumb Style	Wing		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2018 MCR Safety - All Rights Reserved



MCR
SAFETY

4850K


Gloves for Glory

Welder

Specification Sheet

Made In

Pakistan

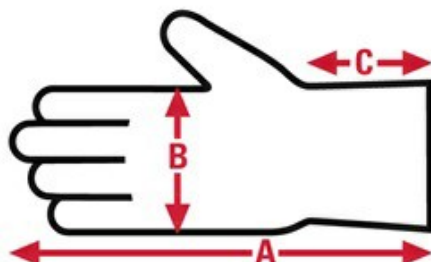

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
4850KL	Large	12.87	4.75	5	24.510 lb.	4.085
4850KM	Medium	12.250	4.63	4.500	22.818 lb.	3.803
4850KS	Small	11.830	4.63	4.500	19.698 lb.	3.283
4850KXXL	XX - Large	12.000	5.250	4.250	28.038 lb.	4.673
4850KXL	X - Large	12.500	4.88	4.500	25.968 lb.	4.328

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2018 MCR Safety - All Rights Reserved