



**MCR  
SAFETY**

**6912**

**Memphis NeoMax  
Supported / Dipped gloves  
Specification Sheet**

**PRODUCT DESCRIPTION:**

00003

**FEATURES:**

- Green Double Dipped Neoprene
- 100% Cotton Brushed Interlock Liner
- Treated with Actifresh®
- 12" Length
- Sandy Finish

**APPLICATIONS:**

Oil and Gas Industry, Agriculture, Construction, Farming,  
Janitorial, Sanitation, Petrochemical industries, Food



**TECHNICAL DATA FOR: 6912L**

<b>Series</b>	Memphis NeoMax	<b>Overall Length</b>	12 in.
<b>Material Group</b>	Supported	<b>EN 388 : CE Score - Abrasion</b>	2
<b>Product Type</b>	Supported / Dipped gloves	<b>EN 388 : CE Score - Cut</b>	1
<b>Glove Size</b>	Large	<b>EN 388 : CE Score - Tear</b>	2
<b>Material</b>	Neoprene	<b>EN 388 : CE Score - Puncture</b>	1
<b>Grade</b>	Industrial Grade	<b>ANSI Contact Heat</b>	Level 2 (Applications less than 284 degrees F)
<b>Lining</b>	Brushed Interlock		
<b>Thumb Style</b>	Wing		
<b>Made In</b>	Sri Lanka		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: [www.mcrcsafety.com](http://www.mcrcsafety.com)


©2018 MCR Safety - All Rights Reserved



**MCR**  
SAFETY

# 6912

## Memphis NeoMax Supported / Dipped gloves Specification Sheet

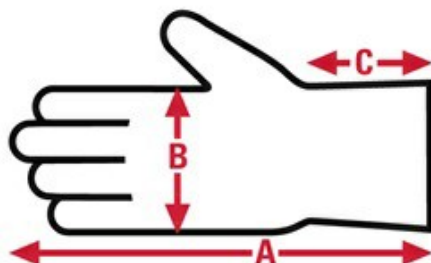

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
6912S	Small	11.680	4.400	N/A	12.342 lb.	2.057
6912XL	X - Large	12.320	5.600	N/A	31.110 lb.	5.185
6912M	Medium	11.840	4.800	N/A	25.422 lb.	4.237
6912L	Large	12.160	5.200	N/A	30.798 lb.	5.133

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: [www.mcrcsafety.com](http://www.mcrcsafety.com)

©2018 MCR Safety - All Rights Reserved