



**MCR
SAFETY**

9318DT510T

Memphis Sleeves

Specification Sheet

PRODUCT DESCRIPTION:

DSM Dyneema® is a high modulus polyethylene (HMPE) fiber available as a continuous filament, spun or engineered fiber (yarn). DSM Dyneema® is 15 times stronger than surgical steel and features excellent abrasion resistance, cut resistance, and comfort. The 9318DT510T features a 10 gauge DSM Dyneema® Diamond Tech® and steel. The sleeve measures 18" and includes a thumb slot. The elbow gusset allows for freedom of movement in the elbow and bicep areas. Extreme cut protection with extreme coolness and comfort.

FEATURES:

- 18" 10 gauge DSM Dyneema Diamond® Tech®/steel
- Elastic wrist and ends
- Thumb slot
- Elbow gusset allows for freedom of movement

APPLICATIONS:

Assembly Line Production, Automotive Assembly, Canning, Food service, Salvage, Sheet metal industry, Warehousing, Bakeries



TECHNICAL DATA FOR: 9318DT510T

| | | | |
|-----------------------|-----------|----------------------|-----------------|
| Series | Memphis | ANSI Cut | ANSI Cut A5 |
| Material Group | Strings | ANSI Abrasion | ANSI Abrasion 3 |
| Product Type | Sleeves | | |
| Gauge | 10 Gauge | | |
| Material | Dyneema | | |
| Made In | Sri Lanka | | |

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2018 MCR Safety - All Rights Reserved




MCR
SAFETY

9318DT510T

Memphis

Sleeves

Specification Sheet

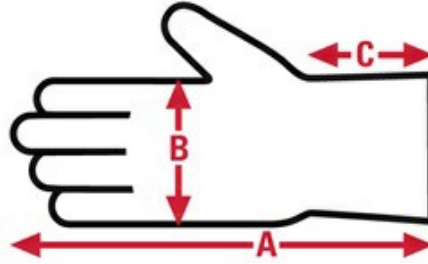

| Item No: | Size: | A: | B: | C: | Case Weight | UOM Weight |
|------------|-------|----|----|-----|-------------|------------|
| 9318DT510T | N/A | 0 | 0 | N/A | 22.800 lb. | 0.190 |

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2018 MCR Safety - All Rights Reserved