



**MCR
SAFETY**

9677 UltraTech Cut Protection Specification Sheet

PRODUCT DESCRIPTION:

One of the most distinguishing DSM Dyneema® characteristics is its cool-to-touch property. DSM Dyneema® fibers inherent ability to dissipate body heat and pass moisture from inside of the glove to the outside, results in longer wear time which promotes greater hand protection. The 9677 UltraTech Dyneema® glove features a 13 gauge certified DSM Dyneema® blended shell with PU coated palm and fingers. The 9677 carries a CE score of 4343 and CPPT cut level of 2. SUPPORTED HAND PROTECTION, Supported Styles with Seamless Shells, UltraTech Series, ?UltraTech Dyneema PU?, 13 Gauge White Shell, White PU. White Dyneema blended seamless shell, White polyurethane palm and finger coated. 12 dz. per case. Individually poly-bagged. Made with DSM certified Dyneema. Each pair displays a tag endorsing compliance with the DSM licensee program. CPPT LEVEL 2: 494 GRAMS EN LEVEL 3: 560 GRAMS Our Honey Grip® string knit line is coated with uncured PVC in a honeycomb pattern to provide you with a strong grip. Grab hold to work with these and you want let go. The 9677XLM features a fingerless 7 gauge gray cotton/polyester shell coated with uncured clear PVC in a honeycomb pattern.



FEATURES:

- 13 Gauge Certified DSM Dyneema White Blended Shell
- White PU Coated Palm and Fingers
- CE 4343
- CPPT Level 2 - 520 Grams
- Cool and Comfortable

APPLICATIONS:

Automotive Assembly, Farming, Landscaping, Assembly Line Production, Carpentry, Janitorial , Material Handling, Salvage, Sheet metal industry

TECHNICAL DATA FOR: 9677XL

| | | | |
|--------|-----------|------------------------------|---|
| Series | UltraTech | EN 388 : CE Score - Abrasion | 4 |
|--------|-----------|------------------------------|---|

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2018 MCR Safety - All Rights Reserved



MCR
SAFETY


9677

UltraTech

Cut Protection

Specification Sheet

| | | | |
|-----------------------|----------------|-------------------------------------|-----------------|
| Material Group | Strings | EN 388 : CE Score - Cut | 3 |
| Product Type | Cut Protection | EN 388 : CE Score - Tear | 4 |
| Glove Size | X - Large | EN 388 : CE Score - Puncture | 3 |
| Gauge | 13 Gauge | ANSI Cut | ANSI Cut A3 |
| Material | Dyneema | ANSI Abrasion | ANSI Abrasion 5 |
| | | | |
| Made In | Sri Lanka | | |

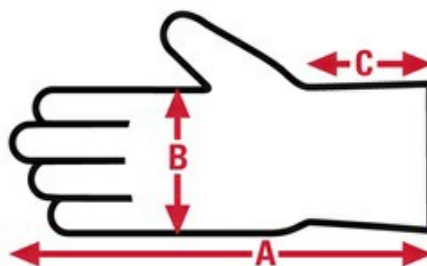

| Item No: | Size: | A: | B: | C: | Case Weight | UOM Weight |
|----------|-----------|-------|------|------|-------------|------------|
| 9677M | Medium | 11.62 | 3.74 | 2.76 | 15.900 lb. | 1.325 |
| 9677L | Large | 12.20 | 3.94 | 2.95 | 21.552 lb. | 1.796 |
| 9677S | Small | 11.22 | 3.54 | 2.76 | 18.876 lb. | 1.573 |
| 9677XL | X - Large | 12.60 | 4.13 | 2.95 | 24.048 lb. | 2.004 |
| 9677XS | X - Small | 10.63 | 3.35 | 2.56 | 12.720 lb. | 1.060 |

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2018 MCR Safety - All Rights Reserved