



**MCR
SAFETY**

9785

Predalite

**Supported / Dipped gloves
Specification Sheet**

PRODUCT DESCRIPTION:

00016

FEATURES:

- Light Nitrile Palm Coated
- Interlock Lining
- 2.5 inch PVC safety cuff
- CE Score 3111
- Treated with Actifresh to reduce odors

APPLICATIONS:

Food, Oil and Gas Industry



TECHNICAL DATA FOR: 9785XL

Series	Predalite	Overall Length	10.5 in.
Material Group	Supported	EN 388 : CE Score - Abrasion	4
Product Type	Supported / Dipped gloves	EN 388 : CE Score - Cut	1
Glove Size	X - Large	EN 388 : CE Score - Tear	2
Material	Nitrile	EN 388 : CE Score - Puncture	1
Grade	Premium		
Lining	Interlock		
Thumb Style	Straight		
Made In	Pakistan		

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2018 MCR Safety - All Rights Reserved




MCR
SAFETY

9785

Predalite

Supported / Dipped gloves

Specification Sheet

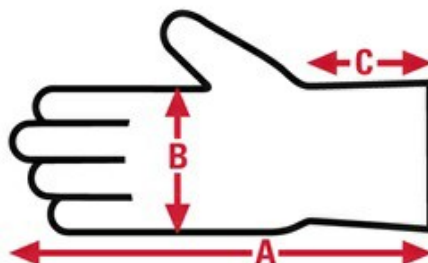

Item No:	Size:	A:	B:	C:	Case Weight	UOM Weight
9785L	Large	10.826	4.720	N/A	34.008 lb.	2.834
9785S	Small	10.237	4.090	N/A	26.800 lb.	2.233
9785M	Medium	10.433	4.330	N/A	30.420 lb.	2.535
9785XL	X - Large	11.024	4.960	N/A	35.244 lb.	2.937

MCR Safety - 1255 Schilling Blvd. W. - Collierville, TN 38017 - USA

Phone: 901-795-5810 - Toll Free: 800-955-6887 - Fax: 800-999-3908 - Web: www.mcrcsafety.com

©2018 MCR Safety - All Rights Reserved