

Tough chemical protection unparalleled comfort

- Three layer design for superior protection against harsh chemicals including acids, solvents and bases
- Thin mil construction provides enhanced tactility and dexterity
- Extra soft material and ergonomic design for outstanding fit, feel and flexibility for longer wear time
- Lower acceptable pinhole rate (0.65 AQL) and extended cuff for reliable protection against hazardous substances
- Silicone free formulation and processing ensure better product protection




Industries

- Aerospace
- Automotive
- Chemical
- Electronics
- Life Sciences
- Machinery and Equipment
- Metal Fabrication
- Recycling & Waste Disposal

Applications

- Blending, compounding materials
- Handling aerospace equipment & parts
- Handling of painting tools including spray guns and robots
- Handling unexpected leaks, spills or other releases
- Maintenance and equipment clean up
- Mounting & dismantling, assembly
- Petrochemicals processing
- Routine & experimental testing
- Sample taking & lab processing
- Transferring liquid & solids

Innovative 3 Layer Design*

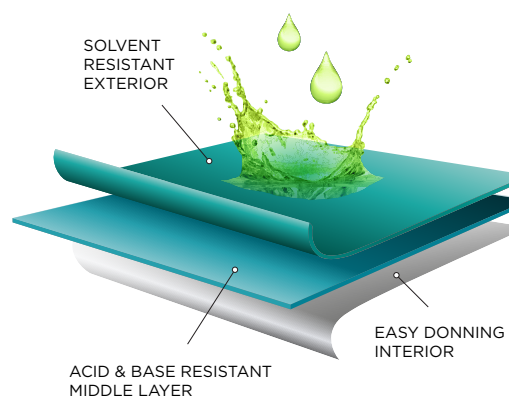

* The method used to produce this 3 layer design is patent pending.

TECHNICAL DATA SHEET:

PRODUCT INFORMATION:

	93-260
Material	Nitrile + Neoprene
Colour	Green outside, blue inside
Glove Design	Ambidextrous, Powder-Free, Textured fingers, Heavy Weight Product
Cuff	Beaded
Manufacturing/QMS Audit Standards	ISO 9001
Regulatory/Standards Compliance	COMPLIANT WITH ASTM D 3577, TYPE II, PPE 89/686, EN 420, 388 & 374 CATEGORY III
Packaging	50 gloves per dispenser box, 10 dispenser boxes in a shipper box
Storage	Keep out of direct sunlight; store in a cool and dry place. Keep away from sources of ozone or ignition.
Country of Origin	Sri Lanka
User Needs Segment	High Risk Glove - Extended cuff gloves to provide additional protection for the wrist and forearm.

PHYSICAL PROPERTIES:

	TYPICAL VALUES						TESTING METHOD
	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL	
Length (mm)	300	300	300	300	300	300	ASTM D3767/EN 420
Average Palm Width	78	89	98	111	116	122	
Freedom from Holes (Inspection level I)	0.65 AQL						ASTM D6319-10/ ASTM D5151-06 (2011)
Palm Thickness Single Wall	0.198mm						ASTM D3767/EN 420
	BEFORE AGING			AFTER AGING			
Ultimate Tensile Strength	22 Mpa			26 Mpa			ASTM D6319-10
Elongation at Break (%)	620			520			ASTM D6319-10
Force at break (N)	16			17			ASTM D6319-10

ORDERING INFORMATION:

	SIZE	5.5 - 6 XS	6.5 - 7 S	7.5 - 8 M	8.5 - 9 L	9.5 - 10 XL	10.5 - 11 XXL
93-260	REORDER NO.	93260060	93260070	93260080	93260090	93260100	93260110

Ansell, ® and ™ are trademarks owned by Ansell Limited or one of its affiliates. © 2016 All Rights Reserved. US Patented and US and non-US Patents Pending: www.ansell.com/patentmarking © 2016 Ansell Limited. All Rights Reserved.

Neither this document nor any other statement made herein by or on behalf of Ansell should be construed as a warranty of merchantability or that any Ansell product is fit for a particular purpose. Ansell assumes no responsibility for the suitability or adequacy of an end user's selection of gloves for a specific application.


About Ansell

Ansell is a world leader in providing superior health and safety protection solutions that enhance human well-being. With operations in North America, Latin America/Caribbean, EMEA and Asia, Ansell employs nearly 14,000 people worldwide and holds leading positions in the personal protective equipment and medical gloves market, as well as in the sexual health and well-being category worldwide. Ansell operates in four main business segments: Medical, Industrial, Single Use and Sexual Wellness. Information on Ansell and its products can be found at www.ansell.eu.

For additional information visit us at www.ansell.eu, or call us at

Ansell Healthcare Europe NV
Riverside Business Park
Blvd International, 55
1070 Brussels, Belgium
Tel. +32 2 528 74 00
Fax +32 2 528 74 01
E-mail info.europe@ansell.com

Performance Standards



Regulatory Compliance

CE 0493 EAC
TP TC 019/2011