


# List 78036

PFAL Bore (Metric)



EDP No.	Body Type	Teeth Type	Designation	Type	Tool Dia. (mm)	No. of Teeth	Tool Height (mm)	Flange Dia. (mm)	Bore Dia. (mm)	Keyway Width (mm)	Keyway Depth (mm)	Applicable Insert
					D		H	D2	d3	a	b	
7803600	Bore	Normal	PFAL04R050M16-5	1	50	5	55	40	16	8.4	5.6	FR1204 / FR1206
7803601			PFAL04R063M22-6	1	63	6	55	45	22	10.4	6.3	
7803602		Close	PFAL04R063M22-8	1	63	8	55	45	22	10.4	6.3	
7803603			Normal	PFAL04R080M25.4-8	2	80	8	50	70	25.4	9.5	
7803604		PFAL04R080M27-8		2	80	8	50	70	27	12.4	7	
7803605		Close	PFAL04R080M25.4-10	2	80	10	50	70	25.4	9.5	6	
7803606			PFAL04R080M27-10	2	80	10	50	70	27	12.4	7	
7803607		Normal	PFAL04R100M25.4-8	2	100	8	50	80	25.4	9.5	6	
7803608			PFAL04R100M27-8	2	100	8	50	80	27	12.4	7	
7803609			PFAL04R100M31.7-8	2	100	8	50	72	31.75	12.7	8	
7803610			PFAL04R100M32-8	2	100	8	50	80	32	14.4	8.2	
7803611		Close	PFAL04R100M25.4-12	2	100	12	50	80	25.4	9.5	6	
7803612			PFAL04R100M27-12	2	100	12	50	80	27	12.4	7	
7803613			PFAL04R100M31.7-12	2	100	12	50	80	31.75	12.7	8	
7803614			PFAL04R100M32-12	2	100	12	50	80	32	14.4	8.2	
7803615		Normal	PFAL04R125M25.4-10	2	125	10	50	80	25.4	9.5	6	
7803616			PFAL04R125M27-10	2	125	10	50	80	27	12.4	7	
7803617			PFAL04R125M38.1-10	2	125	10	63	80	38.1	15.9	10	
7803618			PFAL04R125M40-10	2	125	10	63	85	40	16.4	9.2	
7803619		Close	PFAL04R125M25.4-16	2	125	16	50	80	25.4	9.5	6	
7803620			PFAL04R125M27-16	2	125	16	50	80	27	12.4	7	
7803621			PFAL04R125M38.1-16	2	125	16	63	80	38.1	15.9	10	
7803622			PFAL04R125M40-16	2	125	16	63	85	40	16.4	9.2	
7803623		Normal	PFAL04R160M25.4-12	2	160	12	50	80	25.4	9.5	6	
7803624			PFAL04R160M27-12	2	160	12	50	80	27	12.4	7	
7803625			PFAL04R160M40-12	2	160	12	63	85	40	16.4	9.2	
7803626			PFAL04R160M50.8-12	2	160	12	63	100	50.8	19.1	11	
7803629		Close	PFAL04R160M25.4-20	2	160	20	50	80	40	16.4	9.2	
7803630			PFAL04R160M27-20	2	160	20	50	80	50.8	19.1	11	
7803627			PFAL04R160M40-20	2	160	20	63	85	25.4	9.5	6	
7803628			PFAL04R160M50.8-20	2	160	20	63	100	27	12.4	7	

Packed: 1 pc.  
Note: All accessories included with body.  
Note: **This item is stocked overseas. Please contact OSG for availability and delivery.**

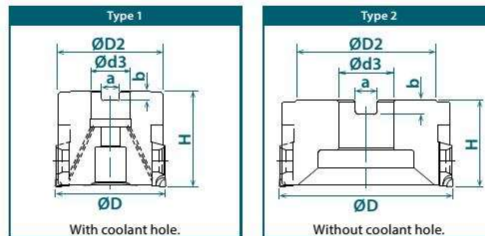

For the use of internal coolant, please use a clamping bolt with coolant holes sold in the market.

