


PIG® SpillBlocker® Dike Corner

PLR268 Ideal For Quick Spill Response, One 4.75" W x 5" L x 3" H Corner

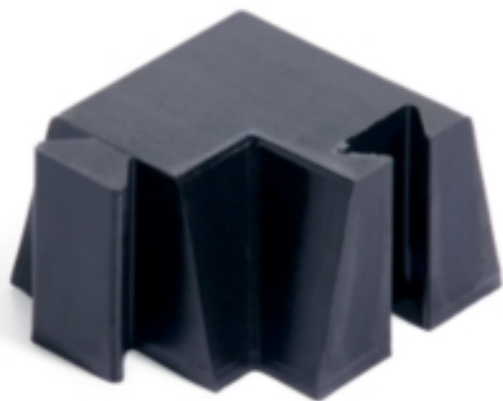

Turn the corner with your SpillBlocker Dikes using this leakproof 90-degree connector.

- Add this handy corner piece to a pair of SpillBlocker Dikes to create a 90° angle
- Built-in dovetail connectors form a liquid-proof seal
- Build any shape or configuration to suit your application or environment



Item#	Description	Dimensions	Weight
PLR268-BK	Black,	4.75" W x 5" L x 3" H	2 lbs.

Metric Equivalent:

Item#	Description	Dimensions	Weight
PLR268-BK	Black,	12.1cm W x 12.7cm L x 7.6cm H	.9 kg

Specifications

Traffic	Foot Traffic
Barrier Dimensions	One 4.75" W x 5" L x 3" H Corner
Dimensions	4.75" W x 5" L x 3" H
Barrier Type	Urethane Blocker
Ideal For	Quick Spill Response
Install/Deploy Type	Temporary/Removable Barrier
Intended Use	Smooth Surfaces
Max liquid temp exposure	Max Exposure Limit 225°F for up to 30 Minutes
Storage Temp Range	Store Between 0°F and 120°F
Temperature Limit	Works from 0°F to 160°F up to 1 Year
Sold as	1 each
Weight	2 lbs.
New Pig Patent	5,236,281

# per Pallet	882
Composition	Polyurethane
UNSPSC	24101907
Pigalog® Page Number	<u>Page 175</u>

Metric Equivalent

Dimensions	12.1cm W x 12.7cm L x 7.6cm H
Weight	.9 kg

Technical Information

Technical Documents

[PIG SpillBlocker Dikes, DrainBlocker Drain Covers and other Blockers](#)

[Urethane Use, Care and Storage](#)

[White paper – Should I be Worried about SPCC? 8 Things you need to know.](#)

[PIG® Blocker Family](#)

[40 CFR 112.7](#)

[40 CFR 122.26](#)

Disclaimers

Urethane Notice

Due to the nature of softer urethane, the physical properties of these products may change over time with exposure to certain environmental conditions like temperature, humidity, and UV radiation. Typical life expectancy is 5 years. Please inspect the stored product regularly to ensure it is in a usable state. For more details and for chemical compatibility, please call Technical Services.



One Pork Avenue • Tipton, PA 16684-0304

1-855-493-4647 • Fax: 1-800-621-7447 • newpig.com • hothogs@newpig.com