



# SPECIFICATION SHEET

## 120-4900



### BRICKYARD BY MAXIMUM SAFETY®

- Synthetic leather palm construction with PVC reinforcement
- Black back with molded TPR reinforcements
- Velcro closure
- Silicone palm coating for added grip

### APPLICATIONS

- Road Construction
- Traffic Safety
- Highway Maintenance
- Manufacturing
- Fleet Maintenance

### CARE INSTRUCTIONS

Machine wash in cold water, hang dry, and do not iron.

### TECHNICAL DATA

|              |   |
|--------------|---|
| MATERIAL     | Synthetic Leather / Nylon / Polyurethane / Spandex / Lycra  |
| CONSTRUCTION | <b>Palm:</b> Synthetic Leather (60% Nylon, 40% Polyurethane)<br><b>Back Palm:</b> Spandex Fabric (96% Polyester, 4% Spandex)<br><b>Cuff:</b> Synthetic Rubber Sheet<br><b>Binding:</b> Light Spandex Fabric (80% Nylon, 20% Spandex)<br><b>Back of Hand Protection:</b> Black Color Vinyl Direct Inject |
| COLOR        | ■ Grey / ■ Black  |
| CUFF STYLE   | Knitwrist   |
| SIZES        | S - XXL   |
| PACKAGING    | 6 pairs per poly bag, 12 pairs per inner carton, 72 pairs per master carton   |
| CASE         | 24.5" x 17.3" x 13" / 62.2cm x 43.9cm x 33cm  |
| CASE WEIGHT  | 31.7 lbs  |
| COO          | Pakistan  |
| HARM CODE    | 6216.00.5820  |



### DIMENSIONS (in/cm)

|          | S          | M           | L          | XL         | XXL         |
|----------|------------|-------------|------------|------------|-------------|
| <b>A</b> | 8.2 / 20.8 | 8.6 / 21.8  | 9 / 22.8   | 9.4 / 23.9 | 9.65 / 24.5 |
| <b>B</b> | 4 / 10.6   | 4.25 / 10.8 | 4.5 / 11.4 | 4.7 / 12   | 5 / 12.7    |


Tolerance (in): +/- 0.125

### PERFORMANCE PROPERTIES

|                    |   |   |   |   |   |   |
|--------------------|---|---|---|---|---|---|
| <b>EN388: 3131</b> |   |   |   |   |   |   |
| ABRASION           | 0 | 1 | 2 | 3 | 4 | - |
| CUT                | 0 | 1 | 2 | 3 | 4 | 5 |
| TEAR               | 0 | 1 | 2 | 3 | 4 | - |
| PUNCTURE           | 0 | 1 | 2 | 3 | 4 | - |

### BARCODES

| ITEM           | PAIR         | DOZEN          | CASE           |
|----------------|--------------|----------------|----------------|
| ■ 120-4900/S   | 616314121623 | 01616314121622 | 02616314121621 |
| ■ 120-4900/M   | 616314121616 | 01616314121615 | 02616314121614 |
| ■ 120-4900/L   | 616314121609 | 01616314121608 | 02616314121607 |
| ■ 120-4900/XL  | 616314121630 | 01616314121639 | 02616314121638 |
| ■ 120-4900/XXL | 616314121647 | 01616314121646 | 02616314121645 |

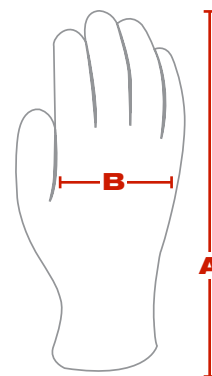

### PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | [www.pipglobal.com](http://www.pipglobal.com)

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.