



# SPECIFICATION SHEET

## 120-4100



### MAXIMUM SAFETY® REINFORCED GOATSKIN LEATHER PALM GLOVE

- Reinforced goatskin leather palm and back provides the softest, most abrasion-resistant leather
- Split goatskin leather fingertips for added protection
- Kevlar® lining offers comfort and enhanced cut protection
- Internal foam padded palm absorbs and dampens shock
- Thermo Plastic Rubber (TPR) molded knuckle guards for maximum protection
- Reflective knuckle tape makes this product easy to see
- Hook & loop closure for easy on/off and a secure fit
- Sandy PVC thumb crotch and thumb reinforcement
- Retail Ready

### APPLICATIONS

- Construction
- Auto repair
- Demolition
- Manufacturing
- Mining
- Fabrication
- Landscaping

### CARE INSTRUCTIONS

Machine wash in cold water. Do not bleach. Hang dry; tumble dry is not recommended. Do not iron.

### TECHNICAL DATA


MATERIAL	Leather / Spandex / Lycra / Kevlar®
CONSTRUCTION	<b>Back:</b> Unlined spandex fabric (96% nylon, 4% spandex) <b>Palm:</b> Goatskin leather, 0.7 - 0.8 gauge <b>Fingers:</b> Heavy lycra fabric (94% nylon, 6% lycra) <b>Knuckles:</b> Vinyl TPR mold <b>Lining:</b> Kevlar® fabric
COLOR	■ Brown / ■ Black
CUFF STYLE	Hook and loop wrist closure
SIZES	S - XXL
PACKAGING	12 pairs per dozen, 6 dozen per case
CASE	22.8" x 15.7" x 9.8" / 50cm x 38cm x 38cm
CASE WEIGHT	21.6 lbs / 9.8 kg
COO	Pakistan



### DIMENSIONS (in/cm)

	S	M	L	XL	XXL
<b>A</b>	9 / 22.9	9.4 / 23.9	9.75 / 24.8	10.15 / 25.8	10.35 / 26.3
<b>B</b>	3.75 / 9.5	4 / 10.2	4.25 / 10.8	4.5 / 11.4	4.75 / 12.1

Tolerance (in): +/- 0.125

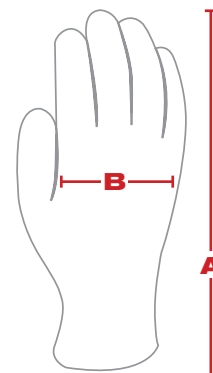

### PERFORMANCE PROPERTIES

<b>EN388: 2332</b>	ASTM F1790-D4 / 1,155g / Level 3 Cut Resistance					
ABRASION	0	1	2	3	4	-
CUT	0	1	2	3	4	5
TEAR	0	1	2	3	4	-
PUNCTURE	0	1	2	3	4	-

### BARCODES

ITEM	PAIR	DOZEN	CASE
■ 120-4100/S	616314069277	01616314069276	02616314069275
■ 120-4100/M	616314069260	01616314069269	02616314069268
■ 120-4100/L	616314069253	01616314069252	02616314069251
■ 120-4100/XL	616314069284	01616314069283	02616314069282
■ 120-4100/XXL	616314069291	01616314069290	02616314069289