


R10

Jobber Drill

NEW
2018.10

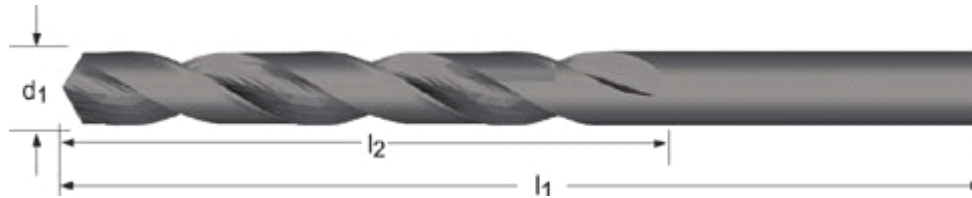

General Purpose



d1 R Inch	d1 decimal Inch	l2 Inch	l1 Inch	e-code		USD
1/64	0.0156	3/16	3/4	R101/64		4.88
1/32	0.0313	1/2	1.3/8	R101/32		2.96
3/64	0.0469	3/4	1.3/4	R103/64		2.96
1/16	0.0625	7/8	1.7/8	R101/16		2.73
5/64	0.0781	1"	2"	R105/64		2.75
3/32	0.0938	1.1/4	2.1/4	R103/32		2.75
7/64	0.1094	1.1/2	2.5/8	R107/64		2.90
1/8	0.1250	1.5/8	2.3/4	R101/8		2.81
1/8	0.1250	1.5/8	2.3/4	R101/8-T	1)	5.42
9/64	0.1406	1.3/4	2.7/8	R109/64		3.11
5/32	0.1563	2"	3.1/8	R105/32		3.17
5/32	0.1563	2"	3.1/8	R105/32-T	1)	13.25
11/64	0.1719	2.1/8	3.1/4	R1011/64		3.48
3/16	0.1875	2.5/16	3.1/2	R103/16		3.84
3/16	0.1875	2.5/16	3.1/2	R103/16-T	1)	4.92
13/64	0.2031	2.7/16	3.5/8	R1013/64		4.25
7/32	0.2188	2.1/2	3.3/4	R107/32		4.69
7/32	0.2188	2.1/2	3.3/4	R107/32-T	1)	5.54
15/64	0.2344	2.5/8	3.7/8	R1015/64		5.13
1/4	0.2500	2.3/4	4"	R101/4		5.36
1/4	0.2500	2.3/4	4"	R101/4-T	1)	11.65
17/64	0.2656	2.7/8	4.1/8	R1017/64		6.53
17/64	0.2656	2.7/8	4.1/8	R1017/64-T	1)	12.50
9/32	0.2813	2.15/16	4.1/4	R109/32		6.72

d ₁ R Inch	d ₁ decimal Inch	l ₂ Inch	l ₁ Inch	e-code		USD
9/32	0.2813	2.15/16	4.1/4	R109/32-T	1)	7.50
19/64	0.2969	3.1/16	4.3/8	R1019/64		7.81
5/16	0.3125	3.3/16	4.1/2	R105/16		8.61
21/64	0.3281	3.5/16	4.5/8	R1021/64		9.58
11/32	0.3438	3.7/16	4.3/4	R1011/32		10.65
23/64	0.3594	3.1/2	4.7/8	R1023/64		11.95
3/8	0.3750	3.5/8	5"	R103/8		12.20
3/8	0.3750	3.5/8	5"	R103/8-T	1)	20.90
25/64	0.3906	3.3/4	5.1/8	R1025/64		14.00
13/32	0.4063	3.7/8	5.1/4	R1013/32		14.45
27/64	0.4219	3.15/16	5.3/8	R1027/64		16.05
7/16	0.4375	4.1/16	5.1/2	R107/16		16.70
29/64	0.4531	4.3/16	5.5/8	R1029/64		18.65
15/32	0.4688	4.5/16	5.3/4	R1015/32		19.60
31/64	0.4844	4.3/8	5.7/8	R1031/64		20.80
1/2	0.5000	4.1/2	6"	R101/2		20.85
33/64	0.5156	4.13/16	6.5/8	R1033/64		37.65
17/32	0.5313	4.13/16	6.5/8	R1017/32		38.90
35/64	0.5469	4.13/16	6.5/8	R1035/64		42.85
9/16	0.5625	4.13/16	6.5/8	R109/16		44.00
37/64	0.5781	4.13/16	6.5/8	R1037/64		46.20
19/32	0.5938	5.3/16	7.1/8	R1019/32		46.20
39/64	0.6094	5.3/16	7.1/8	R1039/64		49.45
5/8	0.6250	5.3/16	7.1/8	R105/8		48.45
41/64	0.6406	5.3/16	7.1/8	R1041/64		54.70
21/32	0.6563	5.3/16	7.1/8	R1021/32		57.40
43/64	0.6719	5.5/8	7.5/8	R1043/64		61.90
11/16	0.6875	5.5/8	7.5/8	R1011/16		61.90

¹⁾With tang