



## 4ASMCO

Stub Drill

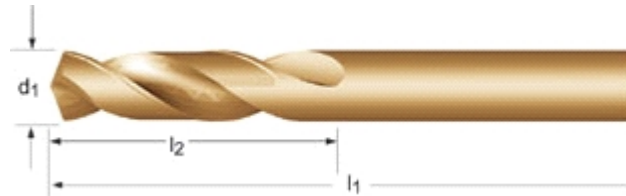

Heavy Duty



d1 R mm	d1 decimal Inch	l2 mm	l1 mm	e-code	USD
2.30	0.0906	13	40	4ASMCO2.3	4.07
2.50	0.0984	14	43	4ASMCO2.5	4.81
3.00	0.1181	16	46	4ASMCO3.0	6.18
3.10	0.1220	18	49	4ASMCO3.1	6.14
3.20	0.1260	18	49	4ASMCO3.2	5.70
3.30	0.1299	18	49	4ASMCO3.3	5.45
3.40	0.1339	20	52	4ASMCO3.4	5.45
3.50	0.1378	20	52	4ASMCO3.5	5.72
3.60	0.1417	20	52	4ASMCO3.6	5.98
3.70	0.1457	20	52	4ASMCO3.7	6.20
4.00	0.1575	22	55	4ASMCO4.0	6.84
4.10	0.1614	22	55	4ASMCO4.1	6.94
4.20	0.1654	22	55	4ASMCO4.2	6.88
4.70	0.1850	24	58	4ASMCO4.7	8.35
4.80	0.1890	26	62	4ASMCO4.8	9.28
4.90	0.1929	26	62	4ASMCO4.9	9.52
5.00	0.1969	26	62	4ASMCO5.0	9.06
5.10	0.2008	26	62	4ASMCO5.1	8.91
5.50	0.2165	28	66	4ASMCO5.5	10.35
5.70	0.2244	28	66	4ASMCO5.7	11.35
6.00	0.2362	28	66	4ASMCO6.0	11.30
6.40	0.2520	31	70	4ASMCO6.4	12.50
6.50	0.2559	31	70	4ASMCO6.5	12.80
6.80	0.2677	34	74	4ASMCO6.8	14.20
7.00	0.2756	34	74	4ASMCO7.0	14.00

d <sub>1</sub> R mm	d <sub>1</sub> decimal Inch	l <sub>2</sub> mm	l <sub>1</sub> mm	e-code	USD
8.00	0.3150	37	79	4ASMCO8.0	19.25
8.50	0.3346	37	79	4ASMCO8.5	20.75
9.50	0.3740	40	84	4ASMCO9.5	24.55
9.80	0.3858	43	89	4ASMCO9.8	26.65
10.00	0.3937	43	89	4ASMCO10.0	28.50
10.20	0.4016	43	89	4ASMCO10.2	27.65
10.50	0.4134	43	89	4ASMCO10.5	32.15
11.00	0.4331	47	95	4ASMCO11.0	32.35
11.20	0.4409	47	95	4ASMCO11.2	37.60
11.50	0.4528	47	95	4ASMCO11.5	36.95
12.00	0.4724	51	102	4ASMCO12.0	39.60