



## R89CO

Jobber Drill

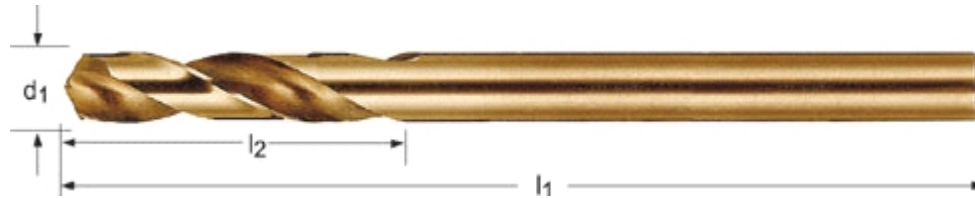

Type D

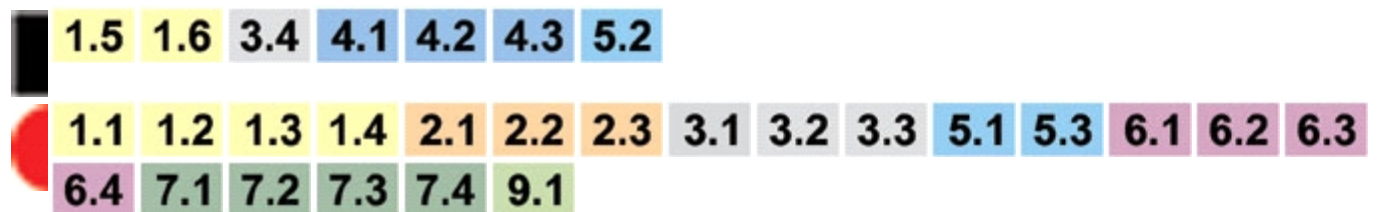

d1 R Nr.	d1 decimal Inch	l2 Inch	l1 Inch	e-code	USD
52	0.0635	7/16	1.7/8	R89CON52	5.03
51	0.0670	1/2	2"	R89CON51	5.03
50	0.0700	1/2	2"	R89CON50	5.03
49	0.0730	1/2	2"	R89CON49	5.37
46	0.0810	9/16	2.1/8	R89CON46	5.37
45	0.0820	9/16	2.1/8	R89CON45	5.37
44	0.0860	9/16	2.1/8	R89CON44	5.37
43	0.0890	5/8	2.1/4	R89CON43	5.03
42	0.0935	5/8	2.1/4	R89CON42	4.85
41	0.0960	5/8	2.3/8	R89CON41	5.09
40	0.0980	13/16	2.3/8	R89CON40	4.81
39	0.0995	13/16	2.3/8	R89CON39	5.16
36	0.1065	13/16	2.1/2	R89CON36	5.86
31	0.1200	7/8	2.3/4	R89CON31	5.74
30	0.1285	15/16	2.3/4	R89CON30	5.69
29	0.1360	15/16	2.7/8	R89CON29	6.40
27	0.1440	1"	3"	R89CON27	6.98
26	0.1470	1"	3"	R89CON26	6.89
25	0.1495	1"	3"	R89CON25	7.25
24	0.1520	1"	3.1/8	R89CON24	7.97
22	0.1570	1.1/16	3.1/8	R89CON22	7.97
21	0.1590	1.1/16	3.1/4	R89CON21	7.55
20	0.1610	1.1/16	3.1/4	R89CON20	7.48
16	0.1770	1.1/8	3.3/8	R89CON16	9.08
13	0.1850	1.1/8	3.1/2	R89CON13	9.59

d <sub>1</sub> R Nr.	d <sub>1</sub> decimal Inch	l <sub>2</sub> Inch	l <sub>1</sub> Inch	e-code	USD
12	0.1890	1.1/8	3.1/2	R89CON12	10.20
11	0.1910	1.3/16	3.1/2	R89CON11	9.95
10	0.1935	1.3/16	3.5/8	R89CON10	9.59
9	0.1960	1.3/16	3.5/8	R89CON9	9.95
8	0.1990	1.3/16	3.5/8	R89CON8	10.20
7	0.2010	1.3/16	3.5/8	R89CON7	9.95
6	0.2040	1.1/4	3.3/4	R89CON6	13.25
5	0.2055	1.1/4	3.3/4	R89CON5	12.80
3	0.2130	1.1/4	3.3/4	R89CON3	12.80