



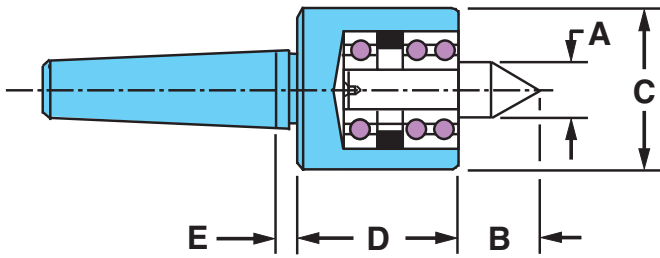


# Econo Tri-Bearing Live Centers

## Standard and Tracer Point

- Accuracy guaranteed to  $\pm .0002$
- Three rows of bearings
- Points are through-hardened to 61-63 Rc
- Sealed bearings lubricated for life, protected against contaminants and coolant
- **Non-repairable**, trade-in available

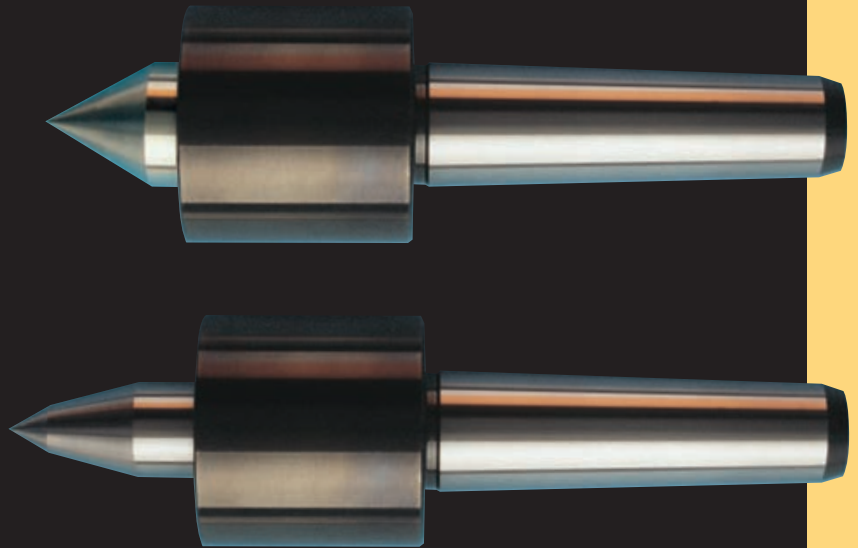

Standard Point

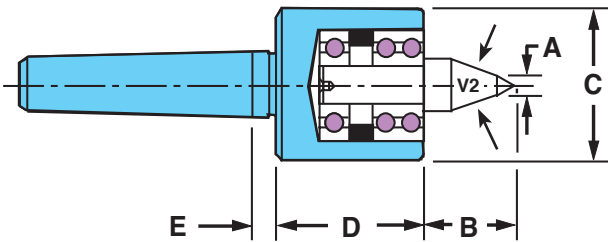

Tracer Point

### STANDARD POINT – MORSE TAPER

Model	Taper	A	B	C	D	E	Max. RPM	W.P. Weight
44102	2	0.56	0.81	1.62	1.63	0.25	2500	300
44103	3	0.81	1.01	2.00	1.93	0.25	2500	500
44104	4	1.00	1.25	2.38	2.25	0.25	2500	1100
44105	5	1.00	1.25	2.38	2.25	0.25	2500	1100

### TRACER POINT – MORSE TAPER

Model	Taper	A	B	C	D	E	V2	Max. RPM	W. P. Weight
44902	2	0.37	1.24	1.62	1.63	0.25	18°	2500	300
44903	3	0.37	1.52	2.00	1.93	0.25	30°	2500	300
44904	4	0.50	2.02	2.38	2.25	0.25	30°	2500	900
44905	5	0.50	2.02	2.38	2.25	0.25	30°	2500	900