



# C4T\* Live Centers

## Standard, Tracer and Long Point

The first and only live center with permanent bearing protection


- Accuracy guaranteed to  $\pm .00004$
- Ideal for applications which use high-pressure coolant
- Inpro/Seal bronze non-contacting bearing isolator seal turns freely, runs cooler, and will never wear out
- Optional Quick Point design
- Point configuration allows for tool clearance
- Riten full service and repair




Contaminants are captured in the outer labyrinth path and expelled through a port.

Inner section of labyrinth seals in bearing lubricant.


\* The Center for Tomorrow, also available in interchangeable point configuration upon request. See page 9.

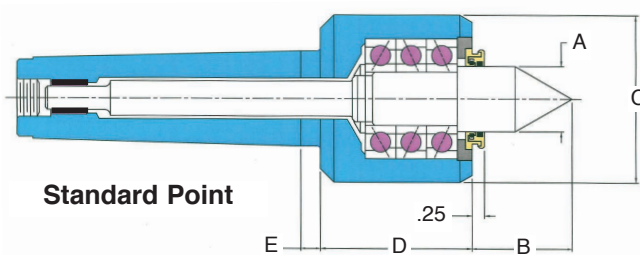

Standard Point

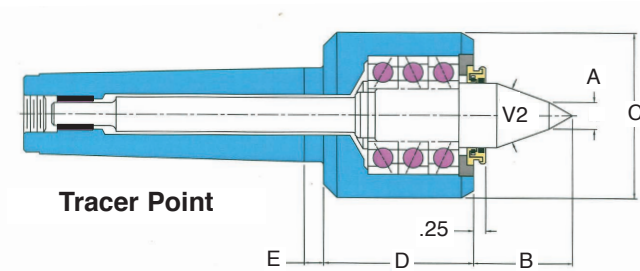

Tracer Point

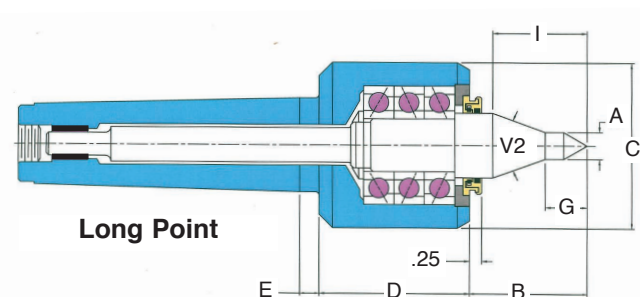

Long Point

STANDARD POINT – MORSE TAPER									
Model	MT	A	B	C	D	E	Max. RPM	W. P. Weight	
53604	4	1.38	1.82	3.07	2.78	0.36	5000	2200	
53605	5	1.38	1.82	3.07	2.78	0.36	5000	5000	

TRACER POINT – MORSE TAPER									
Model	MT	A	B	C	D	E	V2	Max. RPM	W. P. Weight
53904	4	0.56	2.25	3.07	2.78	0.36	40°	5000	1700
53905	5	0.56	2.25	3.07	2.78	0.36	40°	5000	1700

LONG POINT – MORSE TAPER											
Model	MT	A	B	C	D	E	G	V2	I	Max. RPM	W. P. Weight
53104	4	0.50	2.63	3.07	2.78	0.36	0.75	40°	1.96	5000	1100
53105	5	0.50	2.63	3.07	2.78	0.36	0.75	40°	1.96	5000	1100