




ROYAL VALUE-TURN® LIVE CENTERS




- ❑ A **sturdy, low-cost center** designed for light/medium-duty turning applications.
- ❑ Precision three-bearing design enables the Royal Value-Turn® to achieve both high RPM's and good load ratings.
- ❑ A great American-made alternative to low quality imports.

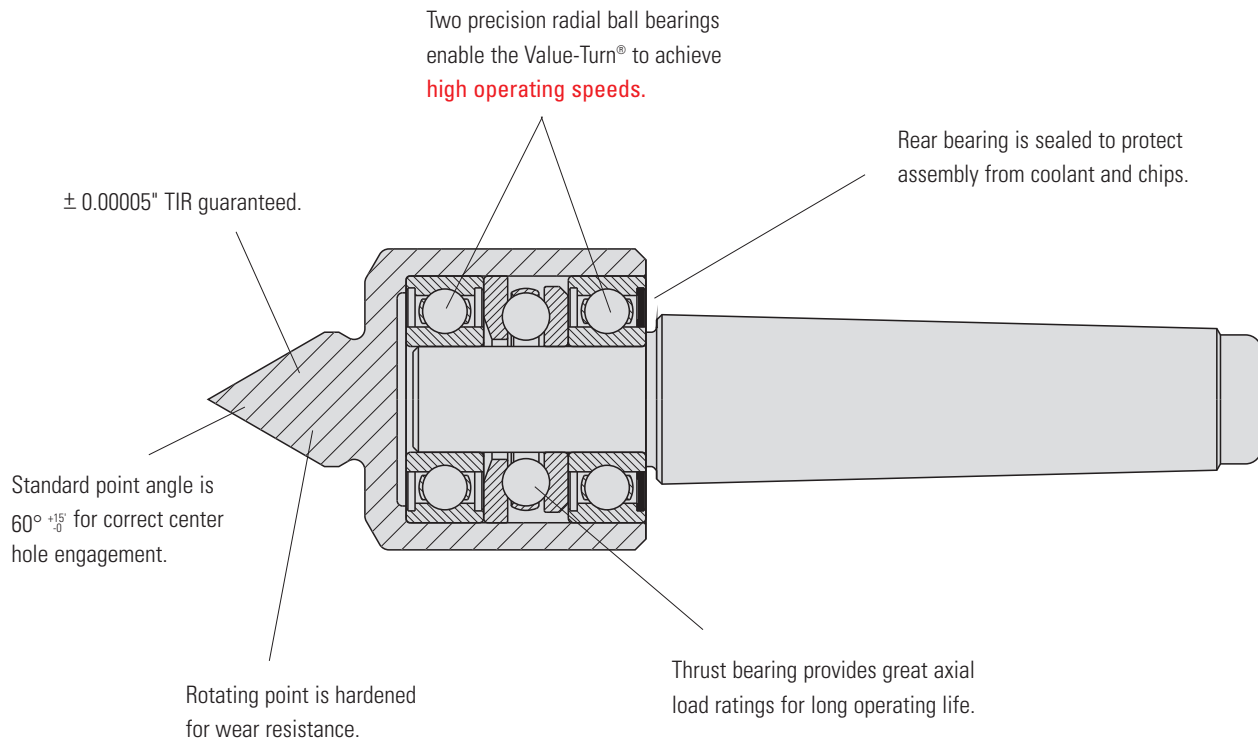

Check out the Royal Live Center Video at www.livecenters.com

ROYAL VALUE-TURN® LIVE CENTERS

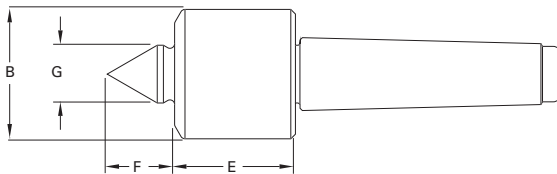

Royal Value-Turn® Live Centers

TAPER	B	E	F	G	MAX. SUGGESTED RPM*	WEIGHT OF WORKPIECE (lbs.)	THRUST LOAD (lbs.)	PART NUMBER	PRICE
1 MT	1.68	1.56	0.88	0.75	5,000	390	3,730	10851	\$258
2 MT	1.68	1.56	0.88	0.75	5,000	390	3,730	10852	239
3 MT	1.68	1.56	0.88	0.75	5,000	390	3,730	10853	257
4 MT	2.45	2.03	1.20	1.13	4,500	750	4,990	10854	312
5 MT	2.45	2.03	1.20	1.13	4,500	750	4,990	10855	350

* Maximum recommended operating limit. Operating above this speed could result in heat build-up and accelerated bearing wear.