


SPECIFICATION SHEET

UND-1 Underlay

- Flat sheet
- Allows matting to be placed over grates and drains
- Perforated to allow for drainage of liquids
- Easy to clean and maintain

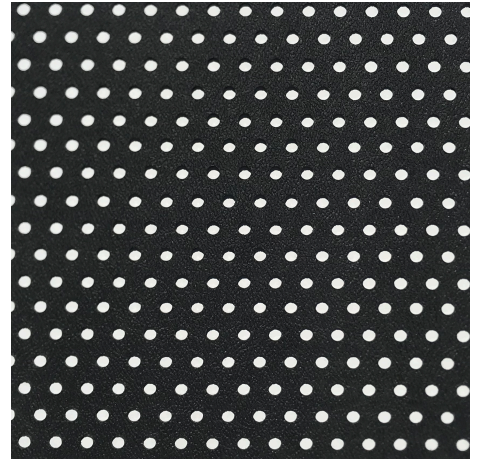

PRODUCT DESCRIPTION	Flat Sheet
DIMENSIONS	45 in x 68 in x 0.093 in
WEIGHT	9 lbs
COMPOSITION	HMWPE
TYPE (D-1248)	III
CLASS (D-1248)	B
CATEGORY	5
HARDNESS, SHORE D (D-2240)	55-75
MELT FLOW INDEX (D-1238)	7-25 HLMI g/10 min
DENSITY (D-1505)	.940-.965 g/10 ³
MAX LOADING	1429 PSI
COLOR	Utility Black



WORKS AS HARD AS YOU DO



**WE DIVERT
2M LBS
OF PVC FROM
LANDFILLS
ANNUALLY**

1-877-578-0101

info@safe-flex.com

www.safe-flex.com



Premium. Flexible. Safe.

The Safe-Flex Floor System is a premium, flexible and safe modular industrial flooring solution that solves challenges faced by many organizations.

The patented Compression Flex construction provides the industry's top anti-fatigue support. The floor system can be custom fit or purchased in ready-made standard kits. The anti-slip varieties work in wet or even oily environments, and bevelled edges ensure that workplace slips, trips and falls are greatly reduced. The ESD and anti-microbial options provide additional environmental control. All matting options are impervious to most chemicals and are class 1 fire resistant. Tiles are sustainably produced using recycled materials and feature world class connection lugs that will last beyond the competition's. A Safe-Flex Floor System works as hard as you do to protect your most important asset—your employees.

AN  **ergo advantage inc** BRAND