


Okuma LB 2000-3000 EX M, MY, MW, MYW

Tool holder program

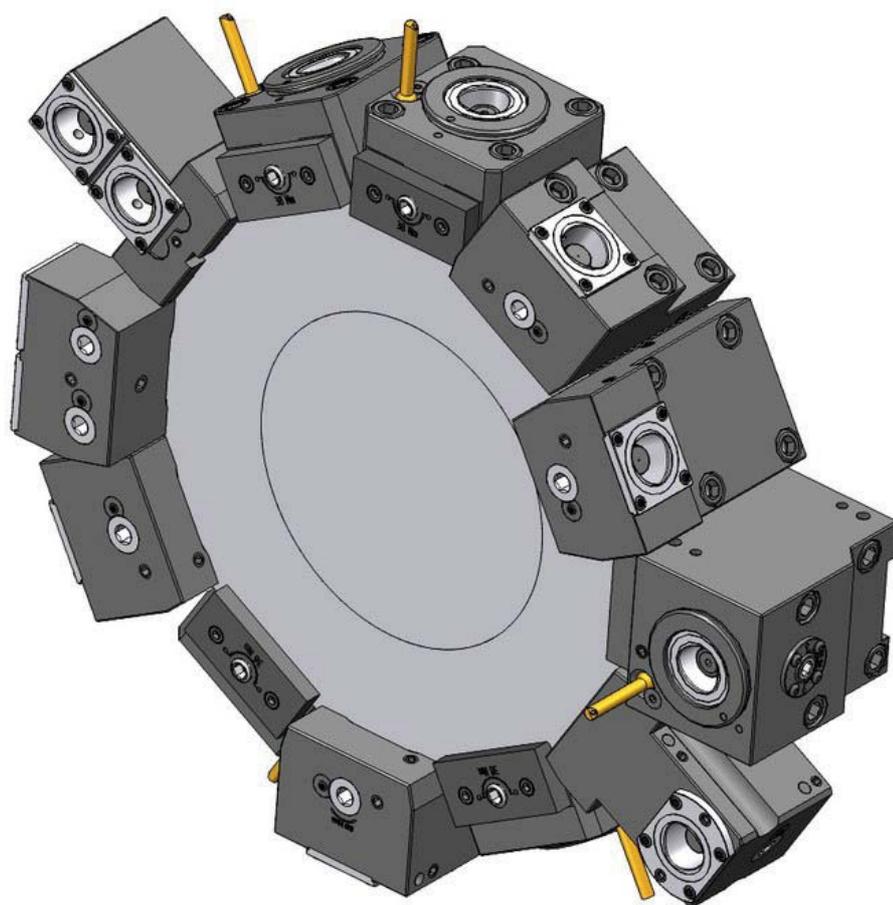

Okuma LB 2000-3000 EX M MY MW MYW

Coromant Capto® Program




OD clamping unit

C4	C4-TRE-OK60A (343-830111C375-RC)	Standard
C4	C4-TLE-OK60A (343-830111C375-LC)	Standard




OD clamping unit, short

C4	343-830111C447	Special
----	----------------	---------



OD clamping unit, double, Y axis

C4	C4-TRE-OK60A-YT (343-830111C429-RC)	Standard
C4	C4-TLE-OK60A-YT (343-830111C429-LC)	Standard



Cut-off holder, adjustable

SH 32	APB-TNE-OK60A-25	Standard
-------	------------------	----------



OD clamping unit, both sides

C4	C4-TRE-OK60A-DT (343-830111C376-RC)	Standard
C4	C4-TLE-OK60A-DT (343-830111C376-LC)	Standard



OD clamping unit, both sides, double, Y axis

C4	343-830111C433	Special
----	----------------	---------




Face and ID clamping unit

C4	C4-TRI-OK60A (343-830111C377-RC)	Standard
C4	C4-TLI-OK60A (343-830111C377-LC)	Standard



Face and ID clamping unit, sub spindle

C4	C4-TRI-OK60A-SS (343-830111C1031-RC)	Standard
C4	C4-TLI-OK60A-SS (343-830111C1031-LC)	Standard



Face and ID clamping unit, double

C4	343-830111C448	Special
----	----------------	---------



Face and ID clamping unit, both sides

C4	343-830111C378	Special
----	----------------	---------

Okuma LB 2000-3000 EX M MY MW MYW

Coromant Capto® Program



Face and ID clamping unit, both sides, double

C4	343-830111C460	Special
----	----------------	---------




OD drill/milling unit

C4	C4-DNE-OK60A-E	1:1	EC	Standard
C4	C4-DNE-OK60A-I	1:1	IC 80 bar	Standard



Face drill/milling unit

C4	C4-DNI-OK60A-E	1:1	EC	Standard
C4	C4-DNI-OK60A-I	1:1	IC 80 bar	Standard



Face drill/milling unit

C4	343-8300820N2463	1:1	EC	Special
----	------------------	-----	----	---------