



Okuma LB 4000 EX M, MY

Tool holder program

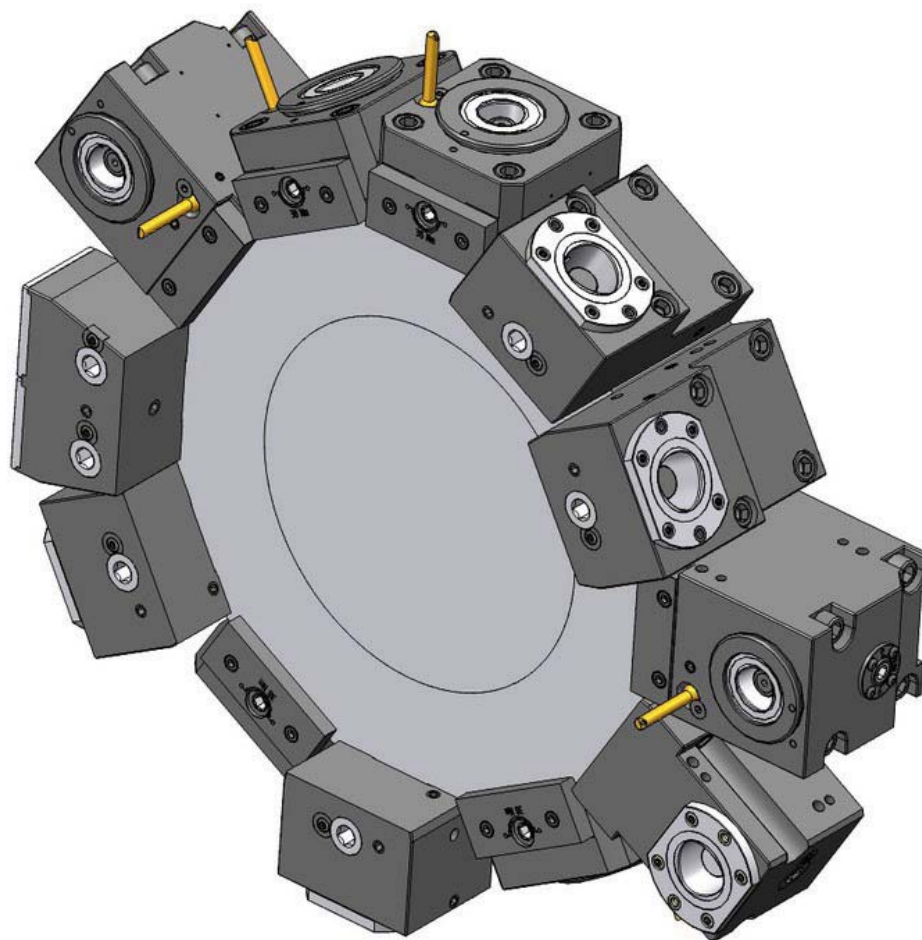

Okuma LB 4000 EX M MY

Coromant Capto® Program



OD clamping unit

C4	343-830111C506			Special
C5	C5-TRE-OK60B (343-830111C379-RC)			Standard
C5	C5-TLE-OK60B (343-830111C379-LC)			Standard



OD clamping unit, short

C4	343-830111C687			Special
C5	343-830111C424			Special



OD clamping unit, double, Y axis

C4	343-830111C549			Special
C4	343-830111C437			Special




Face and ID clamping unit

C4	343-830111C548			Special
C5	C5-TRI-OK60-B (343-830111C380-RC)			Standard
C5	C5-TLI-OK60B (343-830111C380-LC)			Standard



OD drill/milling unit

C4	C4-DNE-OK60B-E	1:1	EC	Standard
C4	C4-DNE-OK60B-I	1:1	IC 80 bar	Standard



Face drill/milling unit

C4	C4-DNI-OK60B-E	1:1	EC	Standard
C4	C4-DNI-OK60B-I	1:1	IC 80 bar	Standard