



# Okuma LT 3000 EX M/MY

Toolholder Program

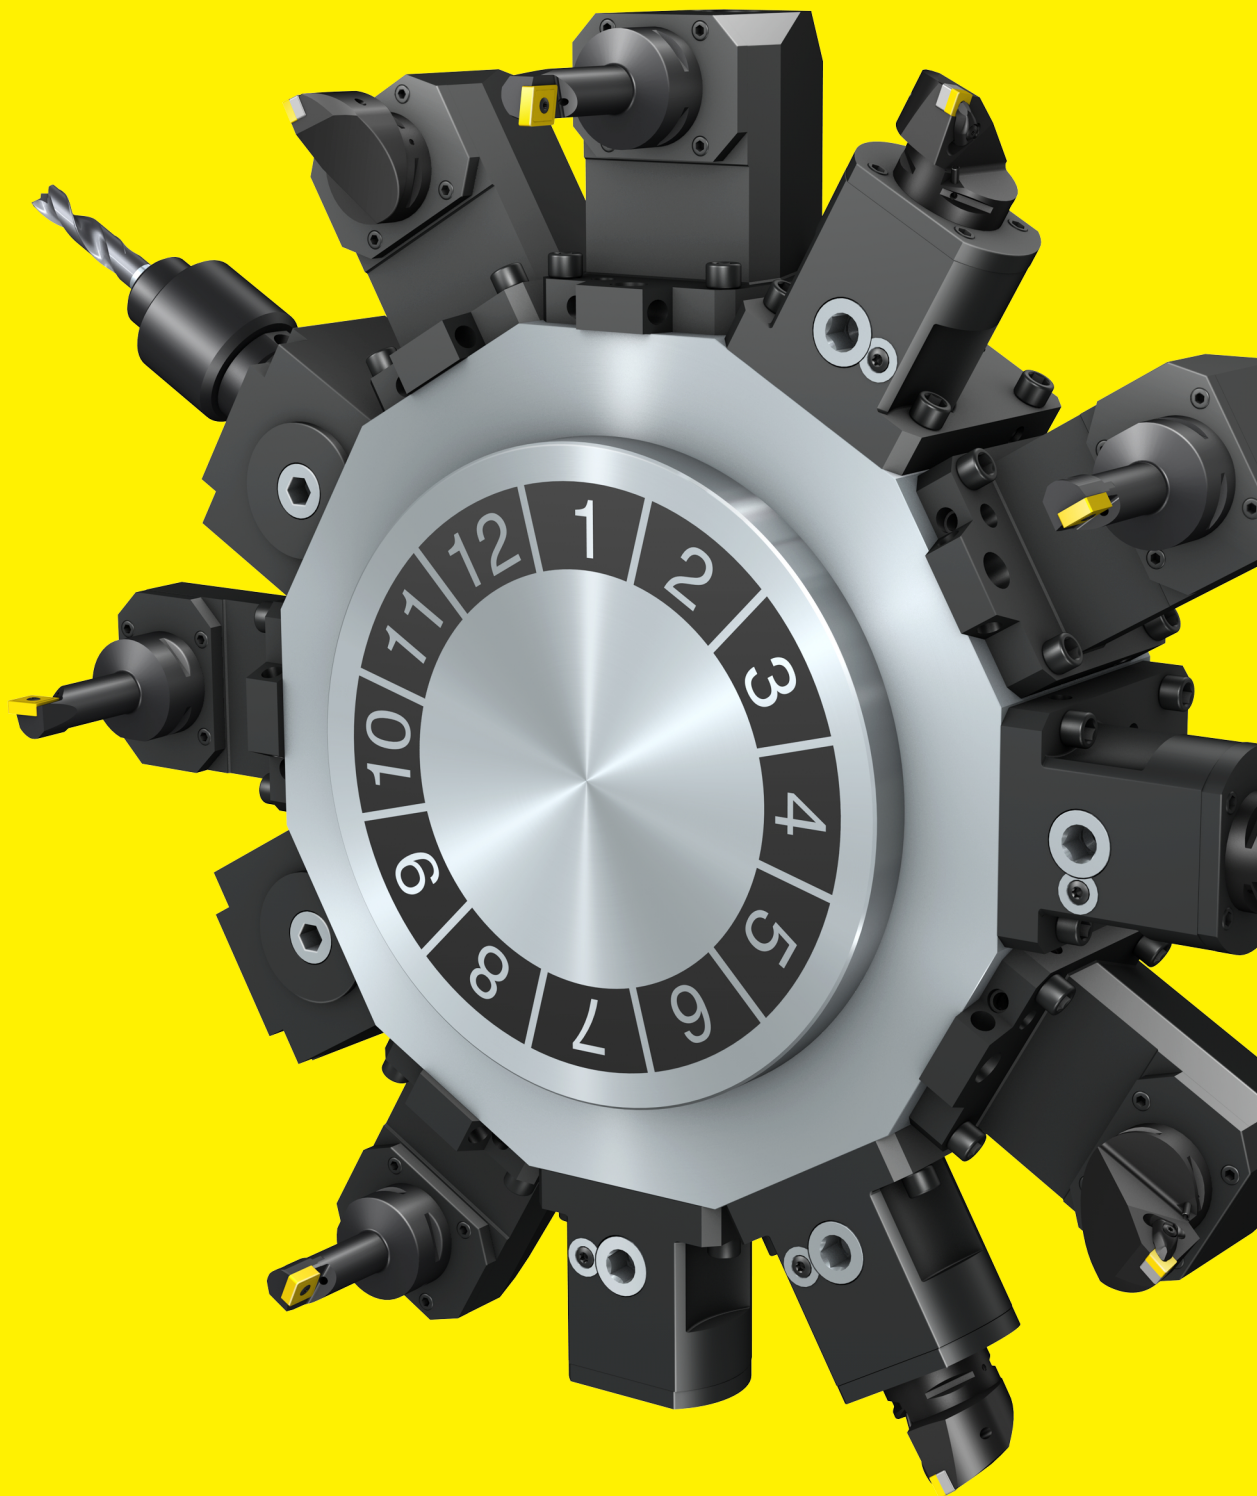


# LT 3000 EX M/MY

Coromant Capto® - Standard Program




## OD clamping unit

C4	C4-TRE-OK60A (343-830111C375-RC)	Standard
C4	C4-TLE-OK60A (343-830111C375-LC)	Standard




## OD clamping unit, double, Y axis

C4	C4-TRE-OK60A-YT (343-830111C429-RC)	Standard
C4	C4-TLE-OK60A-YT (343-830111C429-LC)	Standard




## Cut-off holder, adjustable

SH 32	APB-TNE-OK60A-25	Standard
-------	------------------	----------




## OD clamping unit, both sides

C4	C4-TRE-OK60A-DT (343-830111C376-RC)	Standard
C4	C4-TLE-OK60A-DT (343-830111C376-LC)	Standard




## OD clamping unit, both sides, double, Y axis

C4	343-830111C433	For quotation
----	----------------	---------------



## Face and ID clamping unit

C4	C4-TRI-OK60C (343-830111C1074-RC)	Standard
C4	C4-TLI-OK60C (343-830111C1074-LC)	Standard




## Face and ID clamping unit, both sides

C4	C4-TRI-OK60C-DT (343-830111C1075-RC)	Standard
C4	C4-TLI-OK60C-DT (343-830111C1075-LC)	Standard


# LT 3000 EX M/MY

## Coromant Capto® - Standard Program




### OD drill/milling unit

C4	C4-DNE-OK60C-E (410104051-60)	1:1	EC	Standard
C4	C4-DNE-OK60C-I (410104052-60)	1:1	IC 80 bar	Standard



### Face drill/milling unit

C4	C4-DNI-OK60C-E (410504070-60)	1:1	EC	Standard
C4	C4-DNI-OK60C-I (410504071-60)	1:1	IC 80 bar	Standard



### Face drill/milling unit, both sides

C4	343-830820N2507 (410504072-60)	1:1	EC	For quotation
----	-----------------------------------	-----	----	---------------