

SIEMENS



SINAMICS DCM DC Converter, Control Module













SINAMICS Drives

Catalog
D 23.1

Edition
2014

Answers for industry.

Related catalogs

<p>SINAMICS DCM D 23.2 Cabinet</p> <p>E86060-K5523-A121-A2-7600</p>		<p>SITRAIN ITC Training for Industry</p> <p>Only available in German E86060-K6850-A101-C4</p>	
<p>Motion Control Drives D 31 SINAMICS Inverters for Single-Axis Drives and SIMOTICS Motors</p> <p>E86060-K5531-A101-A1-7600 E86060-E5531-A101-A1-7600 (News)</p>		<p>Products for Automation and Drives CA 01 Interactive Catalog, DVD</p> <p>E86060-D4001-A510-D3-7600</p>	
<p>SINAMICS G130 D 11 Drive Converter Chassis Units SINAMICS G150 Drive Converter Cabinet Units</p> <p>E86060-K5511-A101-A5-7600</p>		<p>Industry Mall Information and Ordering Platform in the Internet:</p> <p>www.siemens.com/industrymall</p>	
<p>SINAMICS GM150, SINAMICS SM150 D 12 Medium-Voltage Converters</p> <p>E86060-K5512-A101-A3-7600</p>			
<p>SINAMICS S120 D 21.3 Chassis Format Units and Cabinet Modules SINAMICS S150 Converter Cabinet Units E86060-K5521-A131-A3-7600</p>			
<p>SIMOREG DC-MASTER DA 21.1 Digital Chassis Converters</p> <p>E86060-K5321-A111-A2-7600</p>			
<p>DC motors DA 12 Sizes 160 to 630 31.5 kW to 1610 kW</p> <p>E86060-K5312-A101-A2-7600</p>			
<p>DC motors DA 12 T Engineering information for Catalog DA 12</p> <p>E86060-T5312-A101-A2-7600</p>			
<p>Motion Control PM 21 SIMOTION, SINAMICS S120 & SIMOTICS Equipment for Production Machines</p> <p>E86060-K4921-A101-A3-7600</p>			

SINAMICS Drives SINAMICS DCM DC Converter, Control Module

Catalog D 23.1 · 2014




The products and systems described in this catalog are manufactured/distributed under application of a certified quality management system in accordance with DIN EN ISO 9001/ DIN EN ISO 14001 (Certified Registration No. AT-00257/1 and AT-00355/1). The certificate is recognized by all IQNet countries.

Supersedes:
Catalog D 23.1 · 2010

Refer to the Industry Mall for current updates of this catalog:
www.siemens.com/industrymall

The products contained in this catalog can also be found in the Interactive Catalog CA 01.

Article No.:
E86060-D4001-A510-D3-7600

Please contact your local Siemens branch

© Siemens AG 2014

Introduction	1
Highlights	2
DC Converter and Control Module	3
Accessories and supplementary components	4
Engineering information	5
Tools and engineering	6
Services and documentation	7
Appendix	8



Printed on paper from sustainably managed forests and controlled sources.

www.pefc.org






Answers for industry.

Integrated technologies, vertical market expertise and services for greater productivity, energy efficiency, and flexibility.

The Siemens Industry Sector is the world's leading supplier of innovative and environmentally friendly products and solutions for industrial companies. End-to-end automation technology and industrial software, solid market expertise, and technology-based services are the levers we use to increase our customers' productivity, efficiency and flexibility. With a global workforce of more than 100 000 employees, the Industry Sector comprises the Industry Automation, Drive Technologies, and Customer Services divisions, as well as the Metals Technologies Business Unit.

We consistently rely on integrated technologies and, thanks to our bundled portfolio, we can respond more quickly and flexibly to our customers' wishes. With our globally unmatched range of automation technology, industrial control and drive technology as well as industrial software, we equip companies with exactly what they need over their entire value chain – from product design and development to production, sales and service. Our industrial customers benefit from our comprehensive portfolio, which is tailored to their market and their needs.


Market launch times can be reduced by up to 50% due to the combination of powerful automation technology and industrial software from Siemens Industry. At the same time, the costs for energy or waste water for a manufacturing company can be reduced significantly. In this way, we increase our customers' competitive strength and make an important contribution to environmental protection with our energy-efficient products and solutions.

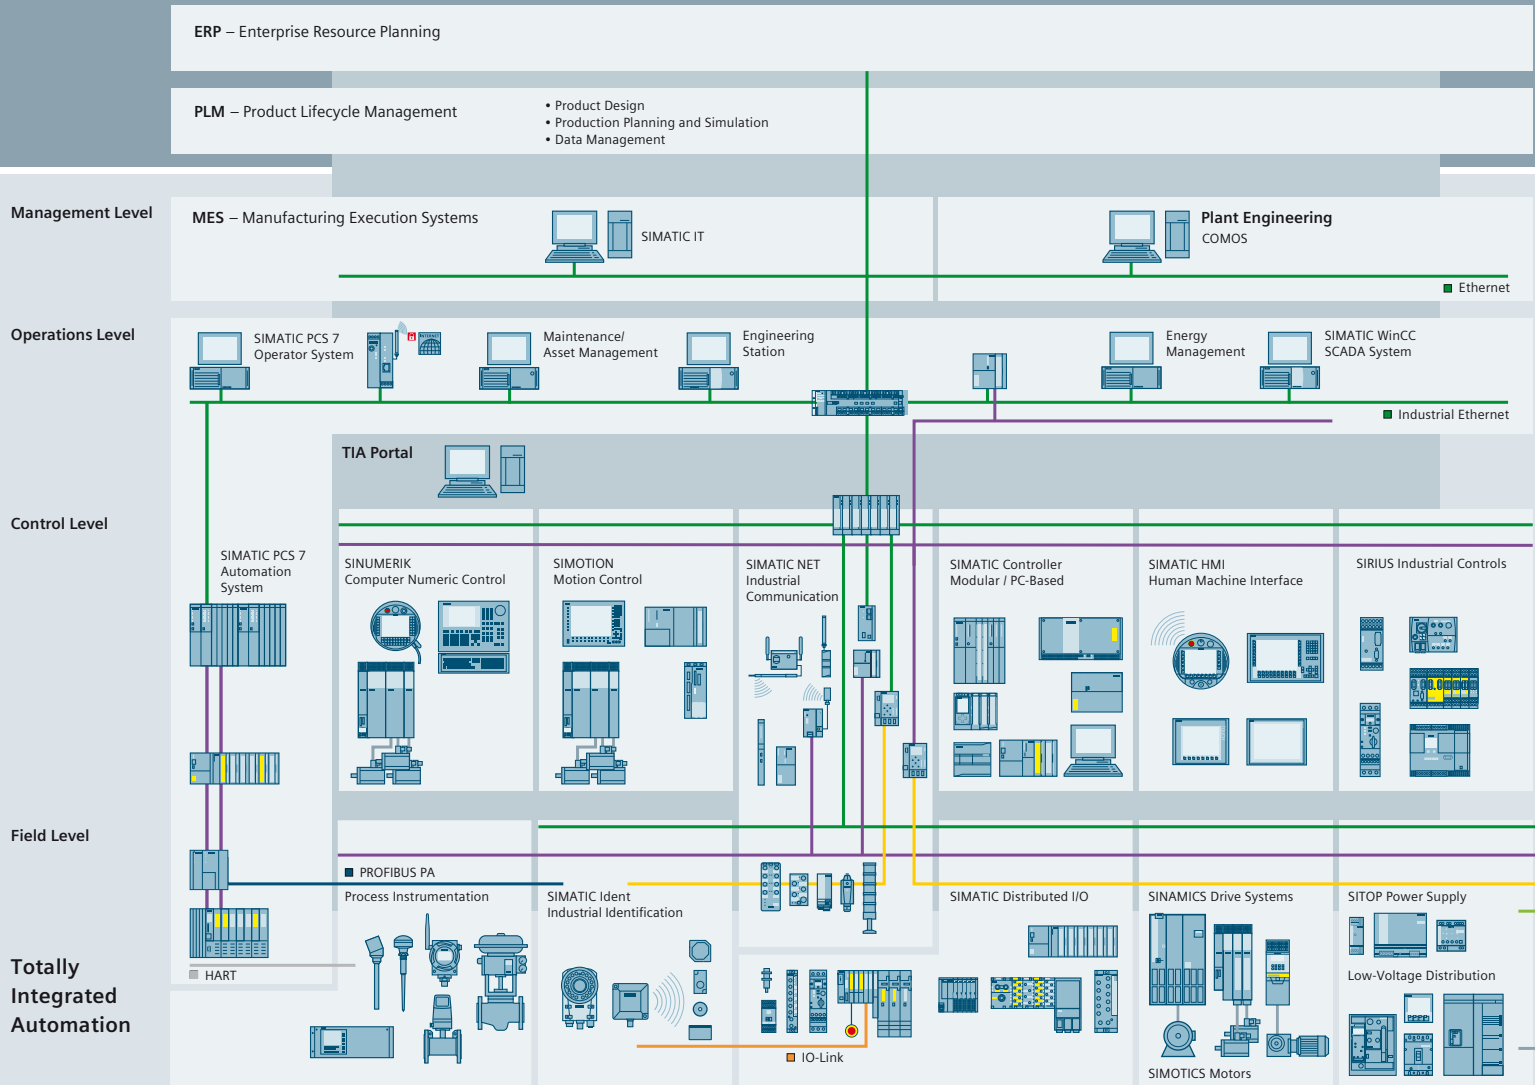


Efficient automation starts with efficient engineering.

Totally Integrated Automation: Efficiency driving productivity.

Efficient engineering is the first step toward better production that is faster, more flexible, and more intelligent. With all components interacting efficiently, Totally Integrated Automation (TIA) delivers enormous time savings right from the engineering phase. The result is lower costs, faster time-to-market, and greater flexibility.

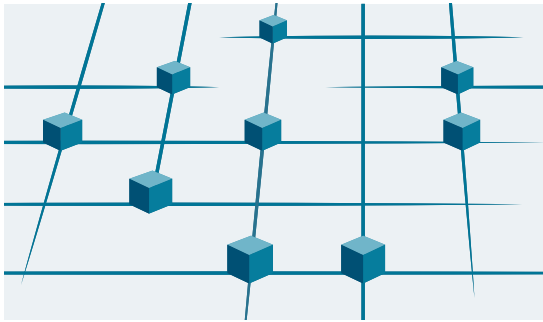

Totally Integrated Automation
Efficient interoperability of all automation components



A unique complete approach for all industries

As one of the world's leading automation suppliers, Siemens provides an integrated, comprehensive portfolio for all requirements in process and manufacturing industries. All components are mutually compatible and system-tested. This ensures that they reliably perform their tasks in industrial use and interact efficiently, and that each automation solution can be implemented with little time and effort based on standard products. The integration of many separate individual engineering tasks into a single engineering environment, for example, provides enormous time and cost savings.

With its comprehensive technology and industry-specific expertise, Siemens is continuously driving progress in manufacturing industries – and Totally Integrated Automation plays a key role.

Totally Integrated Automation creates real value added in all automation tasks, especially for:

- **Integrated engineering**
Consistent, comprehensive engineering throughout the entire product development and production process
- **Industrial data management**
Access to all important data occurring in productive operation – along the entire value chain and across all levels
- **Industrial communication**
Integrated communication based on international cross-vendor standards that are mutually compatible
- **Industrial security**
Systematic minimization of the risk of an internal or external attack on plants and networks
- **Safety Integrated**
Reliable protection of personnel, machinery, and the environment thanks to seamless integration of safety technologies into the standard automation

Making things right with Totally Integrated Automation

Totally Integrated Automation, industrial automation from Siemens, stands for the efficient interoperability of all automation components. The open system architecture covers the entire production process and is based on end-to-end shared characteristics: consistent data management, global standards, and uniform hardware and software interfaces.

Totally Integrated Automation lays the foundation for comprehensive optimization of the production process:

- Time and cost savings due to efficient engineering
- Minimized downtime due to integrated diagnostic functions
- Simplified implementation of automation solutions due to global standards
- Better performance due to interoperability of system-tested components

Introduction



1/2	The SINAMICS drive family
1/2	Application
1/2	Variants
1/3	Platform concept and Totally Integrated Automation
1/3	Quality management according to DIN EN ISO 9001
1/6	The members of the SINAMICS drive family
1/6	<u>SINAMICS DC converters</u>
1/6	• SINAMICS DCM DC Converter
1/6	• SINAMICS DCM Cabinet
1/7	<u>SINAMICS low-voltage converters</u>
1/7	• SINAMICS V20
1/7	• SINAMICS G110
1/7	• SINAMICS G120C
1/8	• SINAMICS G120P
1/8	• SINAMICS G120
1/8	• SINAMICS G110D
1/9	• SINAMICS G120D
1/9	• SINAMICS G130
1/9	• SINAMICS G150
1/9	• SINAMICS G180
1/10	• SINAMICS S110
1/10	• SINAMICS S120
1/10	• SINAMICS S150
1/11	<u>SINAMICS medium-voltage converters</u>
1/11	• SINAMICS GM150, SINAMICS SM150, SINAMICS GL150, SINAMICS SL150
1/12	SINAMICS DCM series of converters
1/12	Overview
1/13	The system components of a DC drive
1/13	Overview
1/14	Configuration

SINAMICS DCM

Introduction


The SINAMICS drive family



Mixer/mills



Plastics



Converting



Machine tools

Pumps/fans/
compressors

Textiles



Packaging



Conveyor systems



Printing machines



Woodworking



Renewable energies



G_D211_EN_00137a

Applications of the SINAMICS range

Application


SINAMICS is the family of drives from Siemens designed for industrial machine and plant construction. SINAMICS offers solutions for all drive tasks:

- Simple pump and fan applications in the process industry
- Complex single-motor drives in centrifuges, presses, extruders, elevators, as well as conveyor and transport systems
- Drive line-ups in textile, plastic film, and paper machines, as well as in rolling mill plants
- High-precision servo drives for the manufacture of wind turbines
- Highly dynamic servo drives for machine tools, as well as packaging and printing machines

Variants

Depending on the application, the SINAMICS range offers the ideal variant for any drive task.

- SINAMICS G is designed for standard applications with induction motors. These applications have less stringent requirements regarding the dynamic performance of the motor speed.
- SINAMICS S handles complex drive tasks with synchronous and induction motors and fulfills stringent requirements regarding
 - the dynamic performance and accuracy
 - the integration of extensive technological functions in the drive control system.
- SINAMICS DCM is the DC drive belonging to the SINAMICS family. As a result of its expandability across the board, it addresses both basic as well as demanding applications in drive technology and in complementary markets.

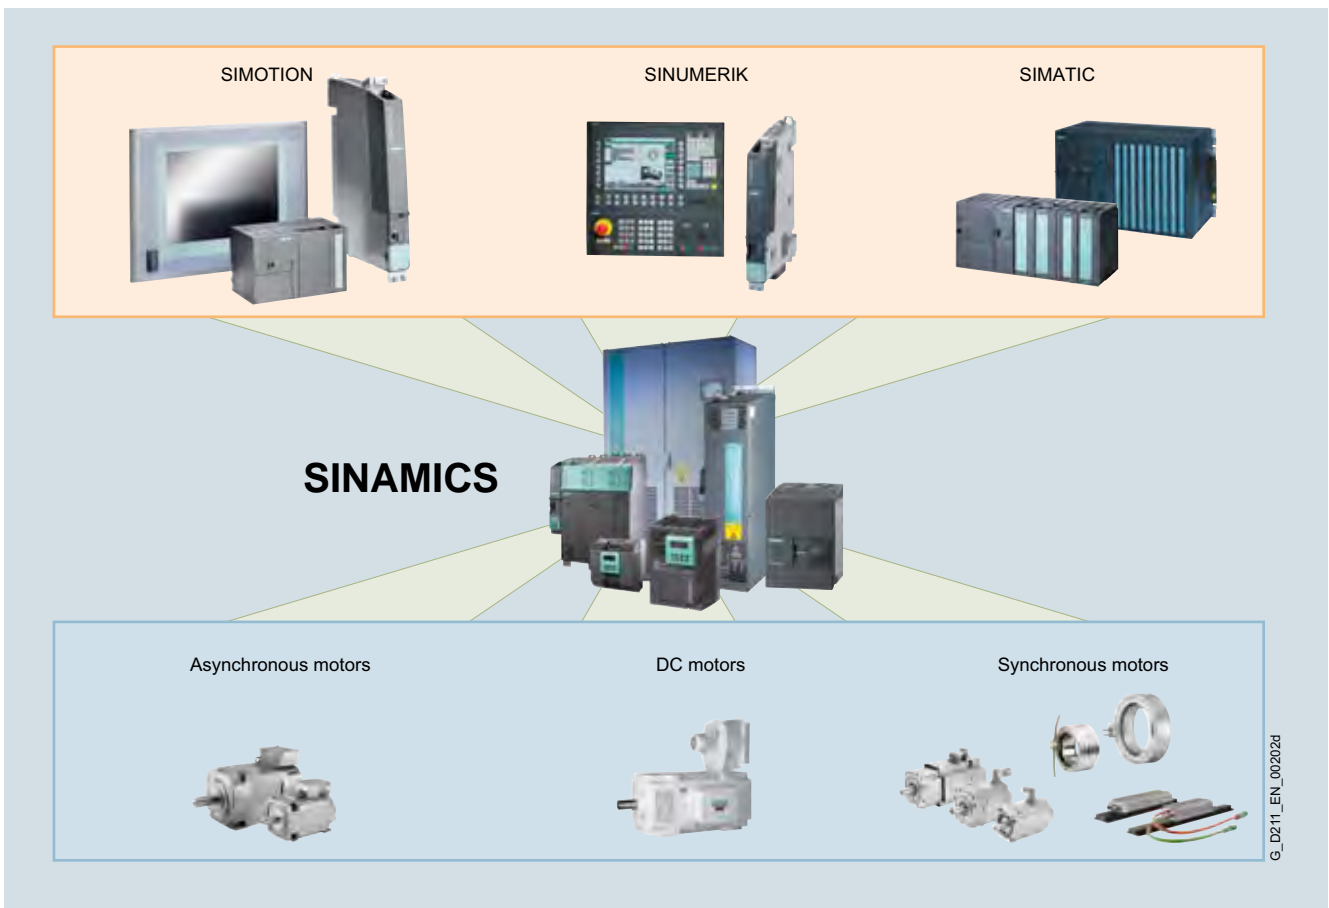

G_D211_EN_00202d

SINAMICS as part of the Siemens modular automation system

Platform concept and Totally Integrated Automation

All SINAMICS versions are based on a platform concept. Common hardware and software components, as well as standardized tools for design, configuration and commissioning tasks, ensure high-level integration across all components. SINAMICS handles a wide variety of drive tasks without system gaps. The different SINAMICS versions can be easily combined with each other.

SINAMICS is part of the Siemens "Totally Integrated Automation" concept. Integrated SINAMICS systems covering engineering, data management and communication at the automation level result in extremely cost-effective solutions based on SIMOTION, SINUMERIK and SIMATIC control systems.

Quality management according to DIN EN ISO 9001

SINAMICS is able to meet the highest quality requirements. Comprehensive quality assurance measures in all development and production processes ensure a consistently high level of quality.








Of course, our quality management system is certified by an independent authority in accordance with DIN EN ISO 9001.

SINAMICS DCM

Introduction

The SINAMICS drive family

1

Low-Voltage AC Converters						
For basic applications		For high-quality applications			For basic servo drives	
						
SINAMICS G110	SINAMICS G110D	SINAMICS G120P	SINAMICS G120	SINAMICS G120D	SINAMICS G130/G150	SINAMICS S110
V/f Control	V/f Control/FCC	V/f Control / Vector Control			Servo Control	
0.12 ... 3 kW	0.75 ... 7.5 kW	0.37 ... 90 kW	0.37 ... 250 kW	0.75 ... 7.5 kW	75 ... 2700 kW	0.12 ... 90 kW
Pumps, fans, conveyor belts	Conveyor technology	Pumps, fans, conveyor belts, compressors, mixers, mills, extruders			Single-axis positioning applications for machine and plant engineering	
Common Engineering Tools						
SIZER for Siemens Drives – for simple planning and configuration				STARTER – for fast commissioning, optimization and diagnostics		

System properties

The SINAMICS range is characterized by the following system properties:

- Standard functionality based on a single platform concept
- Standardized engineering
- High degree of flexibility and combination capability
- Broad power range
- Designed for global use
- SINAMICS Safety Integrated
- Higher efficiency and effectiveness
- High energy efficiency
- Versatile interfacing facilities to higher-level controllers
- Totally Integrated Automation

Application areas

Tailored to suit different application areas, the SINAMICS range encompasses the following products:

AC low-voltage converters (line supply voltage < 1000 V)


- **SINAMICS G110**
- The versatile drive for low power ratings
- **SINAMICS G120P**
- The specialist for pumps, fans and compressors
- **SINAMICS G120**
- The modular single-motor drive for low to medium power ratings
- **SINAMICS G110D**
- The distributed, compact single-motor drive in a high degree of protection for basic applications
- **SINAMICS G120D**
- The distributed, modular single-motor drive in a high degree of protection for sophisticated applications
- **SINAMICS G130 and SINAMICS G150**
- The universal drive solution for single-motor drives with a high power rating
- **SINAMICS S110**
- The basic positioning drive for single-axis applications
- **SINAMICS S120**
- The flexible, modular drive system for demanding drive tasks
- **SINAMICS S150**
- The drive solution for demanding single-motor drives with a high power rating

The SINAMICS drive family

1

Low-Voltage AC Converters

For demanding applications

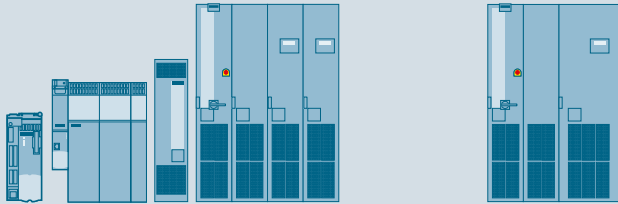

SINAMICS S120

SINAMICS S150


V/f Control / Vector Control / Servo Control

0.12 ... 4500 kW

Motion Control applications in production machines (packaging, textile, printing, paper, plastic), machine tools, plants and process lines, metal forming technology, renewable energies

DC Converters

For basic and demanding applications



SINAMICS DCM


Closed-loop speed control / torque control

6 kW ... 30 MW

Multimotor drives, rolling mills, cross cutters and shears, wire-drawing machines, extruders and kneaders, presses, elevator and crane installations, cableways and lifts, mining hoists, test stand drives

Medium-Voltage AC Converters

For high-power applications



SINAMICS GM150/SM150/GL150/SL150

V/f Control / Vector Control

1 ... 120 MW

Pumps, fans, compressors, mixers, extruders, mills, rolling mills, mining hoist drives, excavators, test stands, marine drives

G_D023_EN_000681

Common Engineering Tools

SIZER for Siemens Drives – for simple planning and configuration

STARTER – for fast commissioning, optimization and diagnostics

Application areas (continued)

DC converter (line supply voltage < 1000 V)

- **SINAMICS DCM**
 - The scalable drive system for basic and demanding applications

AC medium-voltage converters (line supply voltage > 1000 V)

- **SINAMICS GM150**
 - The universal drive solution for single-motor drives
- **SINAMICS SM150**
 - The drive solution for demanding single-motor and multi-motor drives
- **SINAMICS GL150**
 - The drive solution for synchronous motors up to 120 MW
- **SINAMICS SL150**
 - The drive solution for slow-speed motors with the highest torques and overloads

SINAMICS DCM

Introduction

The members of the SINAMICS drive family

1

SINAMICS DC converters

SINAMICS DCM DC Converter



The scalable drive system for basic and demanding applications

SINAMICS DCM Cabinet



The ready-to-connect converter cabinet unit for basic and demanding applications

Main applications

Machines and plants in the industrial environment (steel/aluminum, plastics, printing, paper, cranes, mining, oil and gas, excitation equipment) in the new plant and retrofit businesses

Machines and plants in the industrial environment (steel/aluminum, plastics, printing, paper, cranes, mining, oil and gas) in the new plant and retrofit businesses

Application examples

- Multi-motor drives
- Rolling mills
- Cross cutters and shears
- Wire-drawing machines
- Extruders and kneaders
- Presses
- Elevators and cranes
- Cableways and lifts
- Mine hoists
- Test stand drives

Highlights

- PROFIBUS as standard, PROFINET optional
- Variance of the Control Units
- Field power supply in line with requirements
- Electronics power supply for connection to 24 V DC
- Power section isolated with respect to ground
- Free function blocks and Drive Control Chart
- Expandable functionality using SINAMICS components
- Single-phase connection is possible
- Coated PCBs and nickel-plated copper busbars
- Wide temperature range

- Multi-motor drives
 - Rolling mills
 - Cross cutters and shears
 - Wire-drawing machines
 - Drilling facilities
 - Extruders and kneaders
 - Presses
 - Elevators and cranes
 - Cableways and lifts
 - Mine hoists
 - Test stand drives
- Ready-to-connect, ready-to-switch-on converter cabinet
 - Integrated voltage supply of the motor fan
 - Flexible auxiliary power supply
 - EMC zone concept regarding cabinet installation and voltage levels
 - Monitoring the internal temperature for the drive cabinet
 - Individual components are easily accessible despite compact design
 - Type testing, system testing and routine testing
 - Individual circuit manual with terminal and circuit diagram
 - Special project-specific solutions
 - Commissioning interface (PROFIBUS) in the cabinet door (option)

Catalog D 23.1

Catalog D 23.2

SINAMICS low-voltage converters

SINAMICS V20



The perfect solution for basic applications

SINAMICS G110



The versatile drive for low power ratings

SINAMICS G120C



The compact single-motor drive with a low power rating and matching functionality

Main applications

For operating pumps, fans, compressors and conveyor systems, as well as for simple drive tasks in manufacturing and processing industries

Machines and plants for industrial and commercial applications

For machine manufacturers and distributors in industrial and commercial applications (secondary drive in production machines or generally for water/waste water, automotive)

Application examples

- | | | |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Centrifugal pumps • Radial/axial fans • Compressors • Conveyor belts • Roller/chain conveyors • Single-motor drives in the process industry • Main drives in machines with mechanically coupled axes | <ul style="list-style-type: none"> • Pumps and fans • Auxiliary drives • Conveyor systems • Billboards • Door/gate operating mechanisms • Centrifuges | <ul style="list-style-type: none"> • Conveyor belts • Mixers • Extruders • Pumps, fans and compressors • Basic handling machines |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Highlights

- | | | |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> • Integrated USS and Modbus RTU interfaces • Integrated brake choppers for 7.5 kW to 15 kW • Parameter readout and cloning without power supply • Integrated connection and application macros • ECO mode for V/f, V^2/f • Integrated hibernation mode | <ul style="list-style-type: none"> • Compact • Can be flexibly adapted to different applications • Simple and fast commissioning • Clear terminal layout • Optimum interaction with SIMATIC and LOGO! | <ul style="list-style-type: none"> • Compact • High power density • Simple and fast commissioning • USB port • Plug-in terminal strips • Standard commissioning with SD card • Optimum interaction with SIMOTION and SIMATIC |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|

Brochure V20

Catalog D 31

Catalog D 31

SINAMICS DCM

Introduction

The members of the SINAMICS drive family

1

SINAMICS low-voltage converters

SINAMICS G120P



The specialist for pumps, fans and compressors

SINAMICS G120



The modular single-motor drive for low to medium power ratings

SINAMICS G110D



The distributed converter for cabinet-free installation

Main applications

Machines and plants in industrial and commercial applications (heating, air conditioning, ventilation, water/waste water, process industry, food and beverage industry)

Machines and plants in industrial and commercial applications (machinery construction, automotive, textiles, chemical industry, printing, steel)

Horizontal conveyor applications in the industrial environmental, with the main focus on distribution and logistics in airports; generally suitable for basic conveyor-related tasks with local control or connected to a bus via AS-Interface

Application examples

- Pumps
- Fans
- Compressors
- Servo-controlled positioning
- Pumps and fans
- Compressors
- Conveyor belts
- Extruders
- Mixers and crushers
- Auxiliary and main drives for production machines
- Conveyor systems
- Airports
- Distribution logistics
- Basic-performance applications in automotive
- Food and beverages
- Packaging

Highlights

- High degree of protection IP54
- Integrated pump, fan and compressor functions
- Reduced line harmonic distortions
- Optimum energy management through innovative technology
- Easy-to-use application wizards
- Flexible, modular
- Modular
- Flexible expansion capability
- Simple and fast commissioning
- Regenerative feedback
- Innovative cooling concept
- Optimum interaction with SIMOTION and SIMATIC
- Low profile design with standard drilling dimensions (constant footprint) in IP65 degree of protection
- Simple and fast commissioning
- Versions with and without a maintenance switch
- Optional key-operated switch
- AS-Interface with bus parameterization
- Quick stop function
- Integrated brake control, 180 V DC
- Optimum interaction with SIMATIC and LOGO!

Catalog D 31

Catalog D 31

Catalog D 31

SINAMICS low-voltage converters

SINAMICS G120D



The distributed, modular single-motor drive in a high degree of protection for sophisticated applications

SINAMICS G130



The universal drive solution for single-motor drives with a high power rating (as built-in unit)

SINAMICS G150



The universal drive solution for single-motor drives with a high power rating (as cabinet unit)

SINAMICS G180



The specific drive solution for the oil and gas, chemical and process industries

Main applications

Conveyor drive applications in industrial environments, main focus on the automotive industry; also suitable for high-performance applications, e.g. at airports and in the food, beverages and tobacco industries (without tenside)

Machines and plants in the process and production industry, water/waste, power stations, oil and gas, petrochemicals, chemical raw materials, paper, cement, stone, steel

Machines and plants in the process and production industry, water/waste, power stations, oil and gas, petrochemicals, chemical raw materials, paper, cement, stone, steel

Customer-specific explosion-proof machines and plants in the process and production industry, power stations, oil and gas, chemicals

Application examples

- Conveyor belts
- Storage and retrieval machines
- Hoist drives
- Pumps, fans and compressors
- Servo-controlled positioning of single-motor drives

- Pumps and fans
- Compressors
- Conveyor belts
- Extruders and mixers
- Crushers

- Pumps and fans
- Compressors
- Conveyor belts
- Extruders and mixers
- Crushers

- Pumps and fans
- Compressors
- Conveyor belts
- Extruders and mixers
- Crushers
- Kneaders
- Centrifuges
- Separators

Highlights

- Low profile design with standard drilling dimensions (constant footprint) in IP65 degree of protection
- Modular
- Flexible expansion capability
- Simple and fast commissioning
- Regenerative feedback
- Optimum interaction with SIMOTION and SIMATIC

- Space-saving
- Low noise
- Simple and fast commissioning
- Modular components
- Optimum interaction with SIMATIC

- Space-saving
- Low noise
- Simple and fast commissioning
- Ready-to-connect cabinet unit
- Optimum interaction with SIMATIC

- ETO (Engineered to Order)
- Space-saving
- Low noise
- Simple and fast commissioning
- Ready-to-connect

Catalog D 31

Catalog D 11

Catalog D 11

Catalog D 18.1

SINAMICS DCM

Introduction

The members of the SINAMICS drive family

1

SINAMICS low-voltage converters

SINAMICS S110



The specialist for simple positioning tasks

SINAMICS S120



The flexible, modular drive for sophisticated applications

SINAMICS S150



The drive solution for sophisticated applications in the high performance range

Main applications

Machines and plants in the industrial environment, where machine axes should be quickly and precisely positioned in the simplest possible way

Machines and plants for industrial applications (packaging, plastics, textiles, printing, wood, glass, ceramics, presses, paper, lifting equipment, semiconductors, automated assembly and testing equipment, handling, machine tools)

Machines and plants in the process and production industry, food, beverages and tobacco, automotive and steel industry, mining/open-cast mining, shipbuilding, lifting equipment, conveyors

Application examples

- Handling equipment
- Feed and withdrawal devices
- Stacking units
- Automatic assembly machines
- Laboratory automation
- Metalworking
- Woodworking, glass and ceramic industries
- Plastics processing machines
- Tracking systems for solar technology

- Motion Control applications (positioning, synchronous operation)
- Numerical control, interpolating motion control
- Converting
- Technological applications

- Test stands
- Cross cutters
- Centrifuges
- Conveyor belts
- Presses

Highlights

- For universal use
- Flexible, modular
- Scalable in terms of power and functionality
- Simple and fast commissioning, auto-configuration
- Wide range of motors
- Optimum interaction with SIMATIC

- For universal use
- Flexible, modular
- Scalable in terms of power, functionality, number of axes, performance
- Simple and fast commissioning, auto-configuration
- Wide range of motors
- Optimum interaction with SIMOTION, SINUMERIK and SIMATIC

- Four-quadrant operation as standard
- High control accuracy and dynamic performance
- Minimum harmonic effects on the supply system, considerably lower than the limits specified in IEEE 519 THD
- Tolerant to fluctuations in line voltage
- Simple and fast commissioning
- Ready-to-connect cabinet unit
- Optimum interaction with SIMATIC

Catalog D 31

Catalogs
PM 21, D 21.3, D 31, NC 61 and NC 62

Catalog D 21.3

SINAMICS medium-voltage converters

**SINAMICS GM150, SINAMICS SM150, SINAMICS GL150,
SINAMICS SL150**



The SINAMICS solution for the medium-voltage range

Main applications

Machines and plants in the process industry, in the steel industry and in the mining industry

Application examples

- Pumps, fans, compressors
- Extruders, kneaders and mixers
- Crushers
- Marine drives
- Blast furnace blowers
- Rolling mills
- Mine hoists
- Test stand drives
- Conveyor belts

Highlights

- Space-saving
- Simple and fast commissioning
- Ready-to-connect cabinet units
- Optimum interaction with SIMATIC
- High degree of efficiency and operation that reduces the stress on the motor
- High control accuracy and dynamic performance
- Four-quadrant operation as standard for SINAMICS SM150 and SINAMICS SL150

Catalog D 12 (SINAMICS GM150 and SINAMICS SM150)

Overview

SINAMICS DC MASTER is the new generation of DC converters from Siemens. The name SINAMICS DC MASTER – briefly: SINAMICS DCM – embodies the strengths of this new generation. It combines the advantages of its predecessor SIMOREG DC-MASTER, with the advantages of the SINAMICS family.

When it comes to quality, reliability and functionality, SINAMICS DC MASTER is not only on par with its predecessor – but especially in the area of functionality – offers new features and includes useful functions from its predecessor as standard.

SINAMICS DC MASTER is the new member of the SINAMICS family that now makes many of the SINAMICS tools and components known from AC technology available to DC technology.

As a scalable drive system, the SINAMICS DC MASTER series of converters is convincing both for basic as well as demanding applications. The DC Converter is equipped with a Standard Control Unit (Standard CUD). The option of combining a Standard CUD and Advanced CUD is used to address applications demanding a higher computational performance and more interfaces.

The DC Converter of the SINAMICS DC MASTER series combines the open-loop and closed-loop control and power sections in one device. It especially sets itself apart as a result of the compact, space-saving design.

The AOP30 Advanced Operator Panel and the BOP20 Basic Operator Panel can be used for commissioning and local operation.

The interfaces of the CUD and the number of digital inputs and outputs can be supplemented using additional modules – such as the TM15, TM31 and TM150 Terminal Modules.

The components of a DC drive system and how these are logically interlinked are shown in the following diagram. A flow diagram on pages 1/14 and 1/15 provides support when selecting and dimensioning the required components.

The system components of a DC drive

Overview

Motors (see Catalog DA 12)



Motor-side components (see Catalogs D 23.1, LV 10.1)

Fuses
SICROWBAR DC
(for retrofit for motors with solid yoke and single-phase operation)



SINAMICS DC MASTER components

SINAMICS DC MASTER




Advanced CUD



SINAMICS accessories

For example:
Terminal Modules,
Sensor Module,
Advanced
Operator Panel,
PROFINET Board



SIMOREG CCP



Connection system



Line-side components (see Catalogs D 23.1, IC 10, LV 10.1)

For example:
Commutating reactor
Line fuses
Circuit breaker or contactor
Radio interference
suppression filter
SICROWBAR AC



3 AC line supply


SINAMICS DCM

Introduction

The system components of a DC drive


1

Configuration

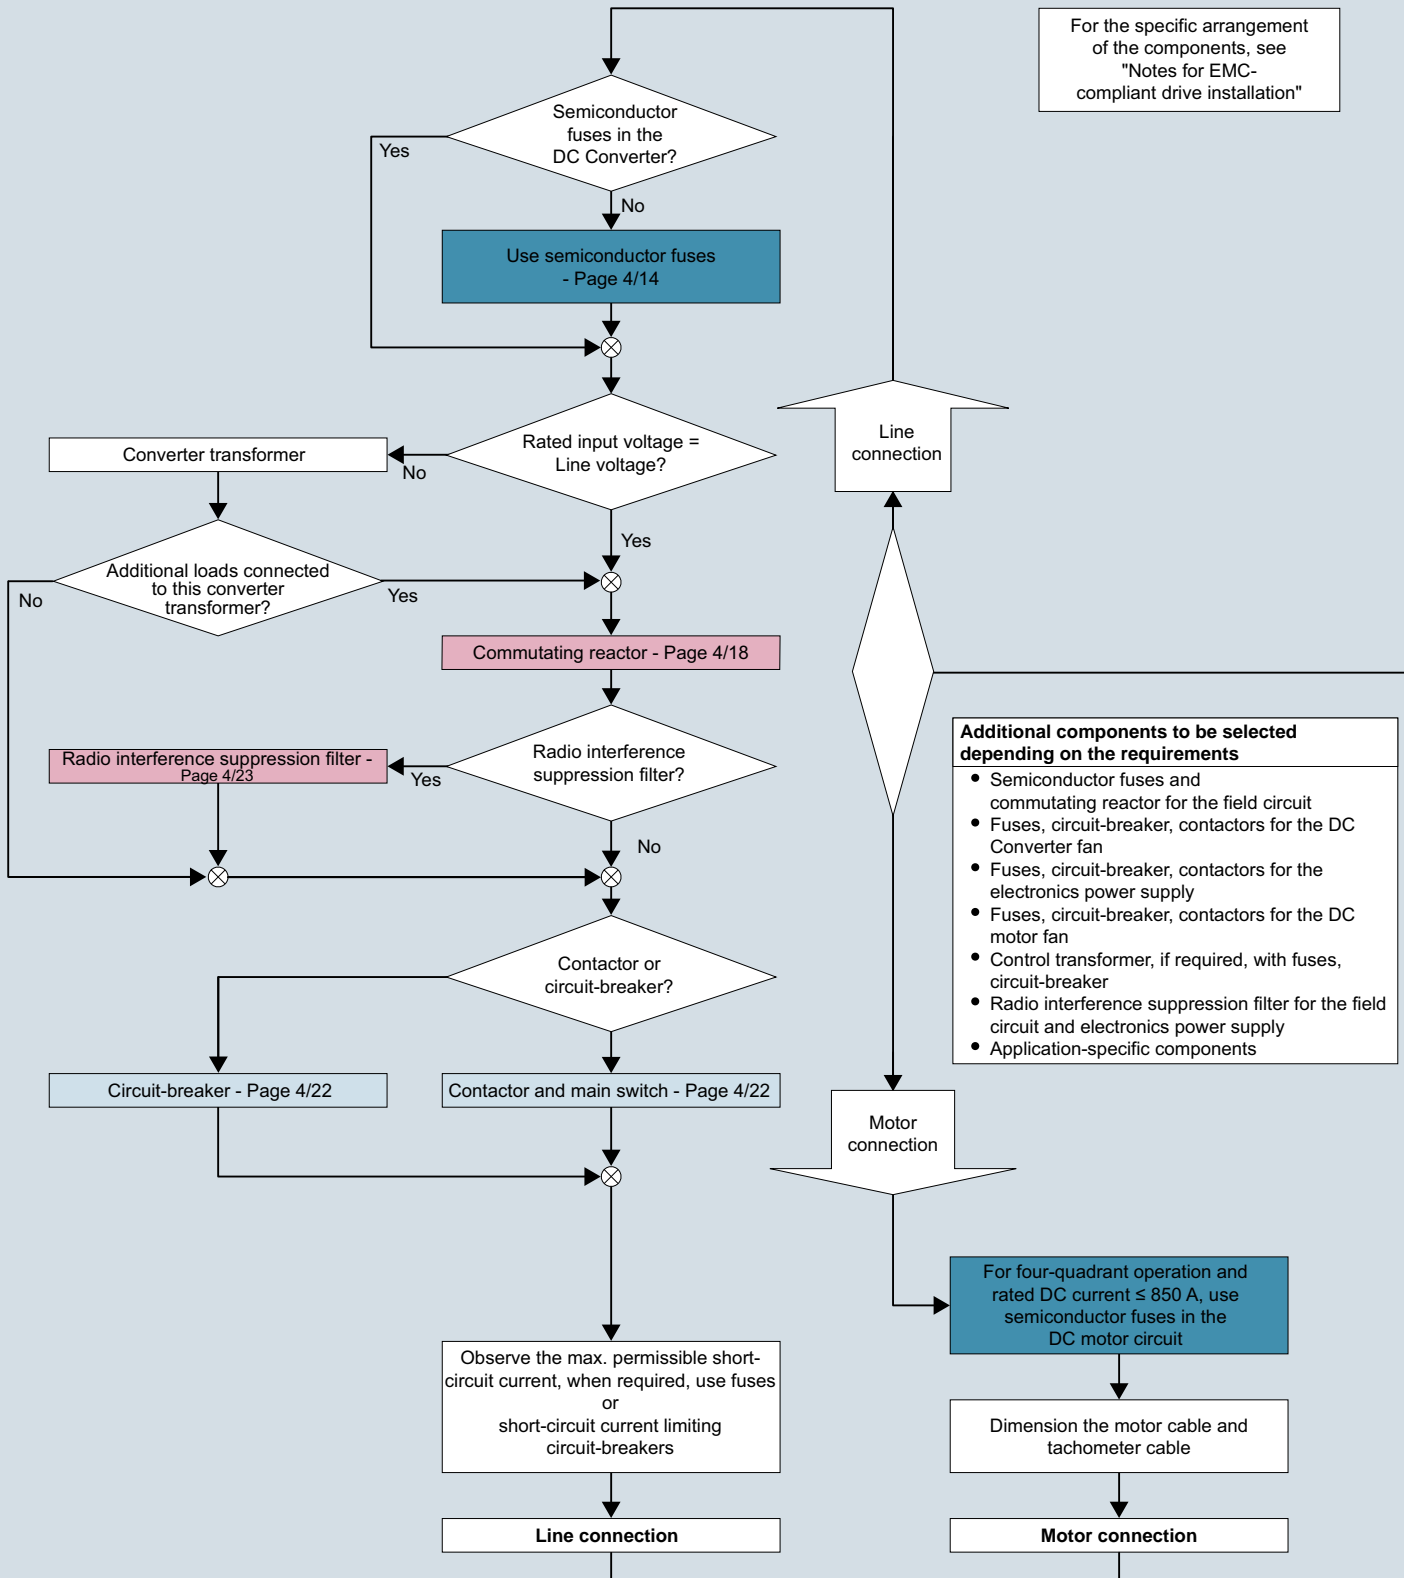

The system components of a DC drive

Configuration (continued)

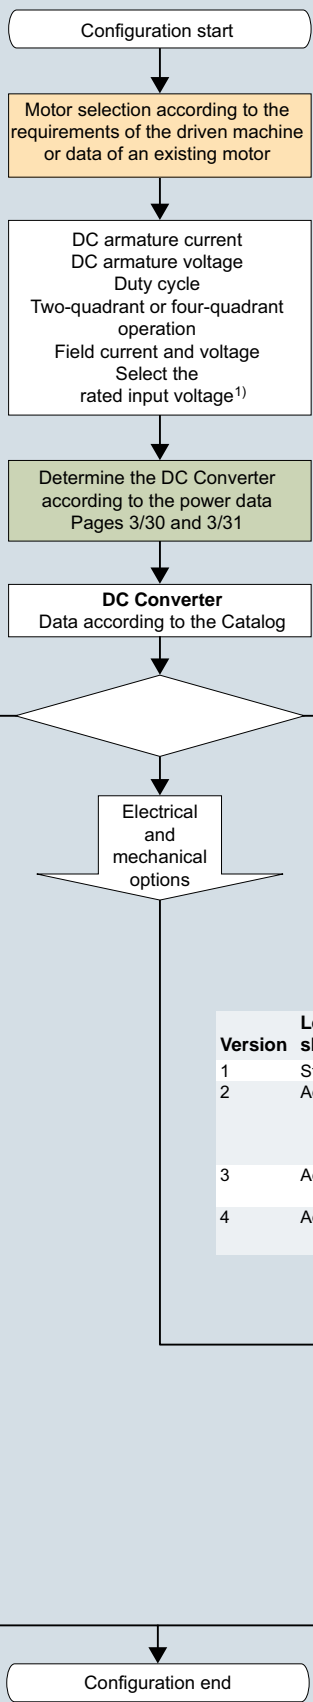

- Catalog DA 12 (Page 3/2) and/or SIZER
- Catalog D 23.1 and/or SIZER
- Catalog LV 10.1 and Catalog D 23.1 and/or SIZER
- Catalog D 23.1 and/or SIZER
- Catalog IC 10

1) Directive for selecting the rated input voltage:
 a) Voltage is given (e.g. modernization)
 b) The secondary voltage of the converter transformer can be freely selected corresponding to the requirements of the load or the selected motor (take into account the rated supply voltages of the converter that are available)

<http://www.siemens.com/dt-configurator>

Version	Lefthand slot	Righthand slot	Functionality	Description
1	Standard CUD		Basic functions/PROFIBUS	Page 3/35
2	Advanced CUD		Basic functions + PROFINET with accessory CBE20 + additional inp./outp. with accessory TM31, TM15 + DRIVE-CLiQ	Page 3/35
3	Advanced CUD	Standard CUD	As for version 2 + Expansion of the computational performance	Page 3/35
4	Advanced CUD	Advanced CUD	As for twice version 2 + Expansion of the computational performance	Page 3/35

G_ID023_EN_000596

SINAMICS DCM

Introduction

Notes

1

Highlights



- 2/2 **Overview**
- 2/2
 - The SINAMICS drive family
 - PROFIBUS as standard, PROFINET optional
- 2/2
 - Variance of the Control Units
- 2/2
 - Field power supply in line with requirements
- 2/3
 - 24 V DC electronics power supply
- 2/3
 - Power section isolated with respect to ground
- 2/3
 - Free function blocks and Drive Control Chart
- 2/3
 - Expandable functionality using SINAMICS components
- 2/3
 - Single-phase connection possible
- 2/4
 - Coated PCBs and nickel-plated copper busbars
- 2/4
 - Wide temperature range

SINAMICS DCM

Highlights

2

Overview

SINAMICS DC MASTER is the drive system for basic applications and demanding DC applications. The use in a wide range of different sectors and complementary markets demands a high degree of scalability and the ability to expand the converter series over a wide range.

In order to be able to guarantee this versatile use, SINAMICS DC MASTER has a whole raft of new features:

The SINAMICS drive family




SINAMICS DC MASTER is a member of the SINAMICS drive family. The individual SINAMICS versions are based on a common platform, especially in the area of interfaces, tools and operator control & monitoring.

All of the SINAMICS drives support the TIA philosophy and share common ways of engineering, communication and data management with the SIMATIC, SIMOTION and SINUMERIK automation systems from Siemens. When using these systems, automation solutions can be very simply generated using SINAMICS.


As a result of the standard and seamless integration into the automation environment of Siemens, customers also profit from faster engineering and commissioning of the complete machine automation and drive technology. Further, training-related costs are reduced and support, service & maintenance and spare parts stocking are simplified.

PROFIBUS as standard, PROFINET optional

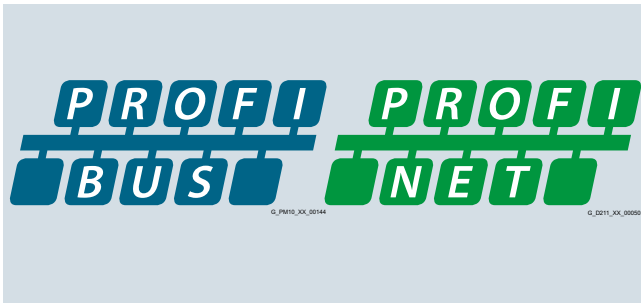


The units are equipped as standard with PROFIBUS – the industry standard. PROFINET or EtherNet/IP is also available as an option. Communication to other fieldbus systems can be realized using external adapters.

Variance of the Control Units

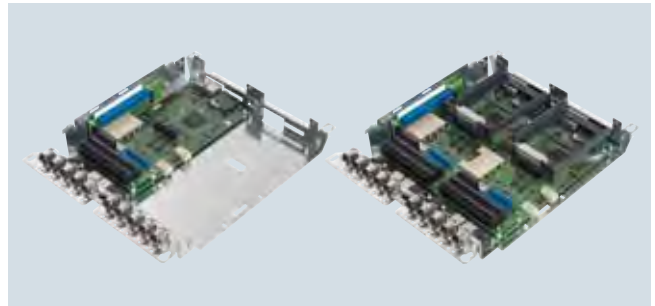

In order to optimally fulfill the requirements relating to interfaces and computational performance for technology functions, a Standard or Advanced CUD or a combination can be selected. It is also possible to use two CUDs to increase the performance for technological open-loop and closed-loop control tasks. This allows optimum adaptation to the wide range of requirements relating to drive technology and complementary markets – both technically and economically.

Field power supply in line with requirements

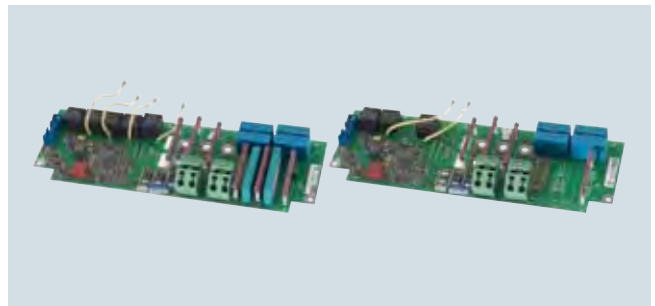

With the introduction of SINAMICS DC MASTER, you have the option of selecting the optimum field power supply for your particular requirements.

SINAMICS DC MASTER is always the optimum choice:

- For units without field (from a rated DC current of 60 A and higher)
- For units with a 1Q field (with integrated free-wheeling circuit)
- For units with a 2Q field to actively reduce the current for high-speed field current changes and integrated field overvoltage protection (from a rated DC current of 60 A and higher)

For units from 1500 A and higher it is also possible to select a version with 85 A rated field current in a 1Q or 2Q version instead of the 40 A field power supply. It goes without saying that an external field power supply unit can also be connected – if the application demands it.

Overview (continued)

24 V DC electronics power supply



The electronics power supply of the DC Converter will be available in two versions:

- For connection to 230 V/400 V AC or
- For connection to 24 V DC (protected against polarity reversal).

Using a 24 V supply, a UPS function can be simply implemented – and therefore the availability of the plant or system increased.

The figure above shows a 24 V DC power supply SITOP smart.


Power section isolated with respect to ground (floating voltage sensing)



The power section voltage sensing inside the unit is floating with respect to the electronics (electrically isolated).

This is the reason that in the future it will not be necessary to disconnect/connect the motor cable to measure the insulation resistance of DC motors. In order to secure the availability of the plant or system and to avoid severe damage to the motor, it is absolutely mandatory that the insulation resistance of DC motors is regularly checked.

Free function blocks and Drive Control Chart

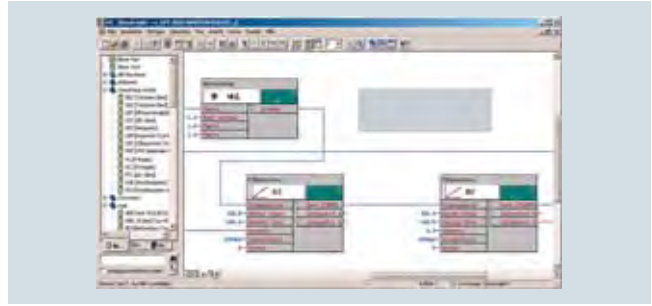


A sufficient number of free function blocks for various applications is included as standard. Optionally, the functional scope can be subsequently extended using free function blocks from Drive Control Chart (DCC). This allows the drive to be optimally adapted to the particular application – both technically and economically.

Expandable functionality using SINAMICS components



Additional inputs and outputs are available by coupling supplementary modules from the SINAMICS range to the DRIVE-CLiQ interface (Advanced CUD). As a consequence, the flexibility when engineering the plant or system is increased and at the same time costs are optimized.

Single-phase connection is possible

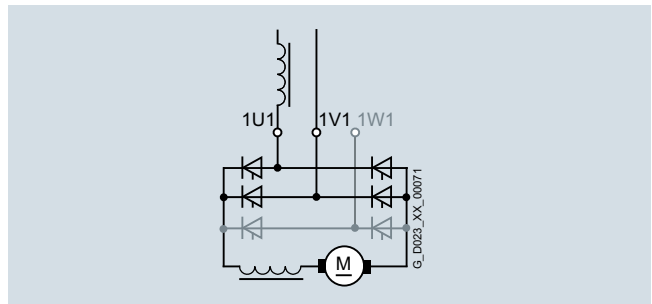


For units up to 125 A and up to 575 V AC, the full functionality is available even when supplied through just two conductors. This means, for example, that when retrofitting a converter with single-phase connection, it is not necessary to make any changes to the existing machine or plant – and the retrofitted drive system can be integrated into state-of-the-art communication concepts (TIA).

SINAMICS DCM

Highlights

Overview (continued)

Coated PCBs and nickel-plated copper busbars

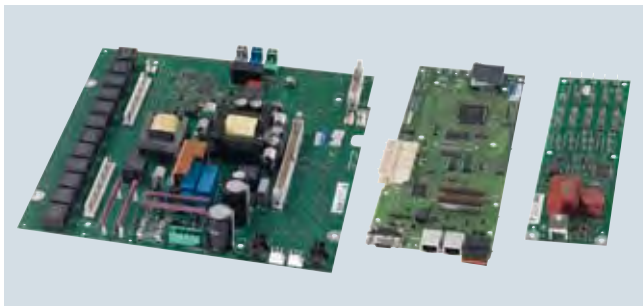

PCBs coated on both sides and nickel-plated copper busbars are two options to improve the reliability for increased degrees of pollution and climatic stressing – as well as for increased environmental stressing (e.g. for aggressive atmospheres).

Wide temperature range



Use in regions with high climatic stressing is made simpler as a result of the -40 °C to $+70\text{ °C}$ temperature range for storage and transport.

DC Converter and Control Module



3/2	General information	3/30	Selection and ordering data
3/2	Overview	3/30	• DC Converters for two-quadrant operation
3/3	Benefits	3/31	• DC Converters for four-quadrant operation
3/3	Application	3/32	Options
3/4	Function	3/32	• Available options
3/4	• Functions of the closed-loop control in the armature circuit	3/33	• Option selection matrix
3/6	• Functions of the closed-loop control in the field circuit	3/34	• Ordering examples
3/6	• Communication between drive components	3/35	• Description of options
3/8	• Single-phase connection	3/38	Circuit diagrams
3/8	• Coolant temperature and installation altitude	3/38	• Control Units
3/9	More information	3/39	• DC Converters
3/9	• Documentation	3/40	• Assignment of terminals and connectors
3/10	DC Converter	3/46	More information
3/10	Overview	3/46	• Free function blocks
3/10	Technical specifications	3/47	• Drive Control Chart (DCC)
3/10	• General technical specifications	3/47	• Power section and cooling
3/12	• SINAMICS DC MASTER converters for:	3/47	• Parameterizing devices
3/12	- 400 V 3 AC, 60 to 280 A, two-quadrant operation	3/48	• Closed-loop control and open-loop drive control
3/13	- 400 V 3 AC, 400 to 1200 A, two-quadrant operation	3/49	• Optimization run
3/14	- 400 V 3 AC, 1600 to 3000 A, two-quadrant operation	3/49	• Monitoring and diagnostics
3/15	- 480 V 3 AC, 60 to 280 A, two-quadrant operation	3/50	• Functions of the inputs and outputs
3/16	- 480 V 3 AC, 450 to 1200 A, two-quadrant operation	3/51	• Safety shutdown (E-STOP)
3/17	- 575 V 3 AC, 60 to 800 A, two-quadrant operation	3/51	• Serial interfaces
3/18	- 575 V 3 AC, 1100 to 2800 A, two-quadrant operation	3/51	• Control terminal block
3/19	- 690 V 3 AC, 720 to 2600 A, two-quadrant operation	3/52	• Interface to the motor
3/20	- 830 V 3 AC, 950 to 1900 A and 950 V 3 AC, 2200 A, two-quadrant operation	3/52	• Siemens DC motors
3/21	- 400 V 3 AC, 15 to 125 A, four-quadrant operation	3/53	Control Module
3/22	- 400 V 3 AC, 210 to 850 A, four-quadrant operation	3/53	Application
3/23	- 400 V 3 AC, 1200 to 3000 A, four-quadrant operation	3/53	Design
3/24	- 480 V 3 AC, 15 to 210 A, four-quadrant operation	3/53	Technical specifications
3/25	- 480 V 3 AC, 280 to 1200 A, four-quadrant operation	3/54	Selection and ordering data
3/26	- 575 V 3 AC, 60 to 850 A, four-quadrant operation	3/54	Options
3/27	- 575 V 3 AC, 1100 to 2800 A, four-quadrant operation	3/55	Accessories
3/28	- 690 V 3 AC, 760 to 2600 A, four-quadrant operation	3/56	Circuit diagrams
3/29	- 830 V 3 AC, 950 to 1900 A and 950 V 3 AC, 2200 A, four-quadrant operation		

SINAMICS DCM

DC Converter and Control Module

General information

Overview



SINAMICS DC MASTER converter

The SINAMICS DC MASTER series of converters includes the DC Converter and Control Module product versions.

The DC Converter includes built-in units for connection to a three-phase supply. These are used to supply the armature and field of variable-speed DC drives. The rated DC current range of the units extends from 15 to 3000 A and can be increased by connecting DC Converters in parallel.

Depending on the application, units for two-quadrant or four-quadrant operation and with integrated field power section are available. The units are autonomous as a result of the integrated parameterizing device and do not require any additional equipment for parameterization. All functions associated with open-loop and closed-loop control, as well as all monitoring and auxiliary functions, are handled by a microprocessor system. Setpoints and actual values can either be entered as analog or digital values.

The SINAMICS DC MASTER Control Module is the successor of the SIMOREG CM and is mainly used to retrofit and modernize DC drives.

SINAMICS DC MASTER converters are available in the following sizes (self-ventilated up to 125 A):



DC Converter						Control Module
Rated DC current A						
≤ 30	≤ 280	≤ 600	≤ 850	≤ 1200	≤ 3000	–
Dimensions (W × H × D) mm						
268 × 385 × 221	268 × 385 × 252	268 × 625 × 275	268 × 700 × 311	268 × 785 × 435	453 × 883 × 505	271 × 388 × 253

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

Benefits

- Less training time and costs and maximum number of identical parts through the extensive product range of the SINAMICS DC MASTER.
The standard and seamless series of SINAMICS DC MASTER units addresses a wide current and voltage range. The series of units is designed for connection to three-phase line supplies. Furthermore, the units can also be connected to single-phase line supplies up to and including a rated DC current of 125 A.
- Flexible expandability regarding functionality and performance.
The extensive product range and the many options allow the DC Converter to be optimally adapted to customer requirements – both technically and economically. Different customer requirements, the type and number of interfaces as well as the computational performance and speed can be precisely fulfilled by selecting between either a Standard CUD, an Advanced CUD or a combination of both.
- Plant and system availability are increased by being able to quickly and simply replace components.
Replaceable components have been designed so that they can be quickly and simply replaced. The spare parts that are available can be viewed at any time, assigned to the serial number of the unit.
- Easy commissioning and parameterization using interactive menus on the AOP30 Advanced Operator Panel with graphics-capable, backlit LCD and plain-text display, or PC-supported using the STARTER commissioning tool (see "Tools and engineering").
- Since the SINAMICS DC MASTER is already pre-configured at the factory, no device-specific parameters need to be set at all. The device is adapted to the relevant application by parameters in a fully electronic process. The units do not feature any potentiometers, switches, jumpers or DIP switches which means that they can be put back into operation as soon as they have been serviced.
- During the complete production process, all of the components are subject to comprehensive tests and checks. This guarantees a high functional safety.
- Can be easily integrated into automation solutions, e.g. using a standard PROFIBUS communication interface and various analog and digital interfaces.

Application

DC drive technology: Dynamic, rugged and cost effective

Depending on the application, DC drives are frequently the most favorably-priced drive solution. They have many advantages when it comes to reliability, operator friendliness and operating characteristics. Just as before, there are some good technical and economic reasons for still using DC drives in many industrial areas:

- Favorably-priced four-quadrant operation
 - Continuous operation at a low speed
 - Full torque and low torque ripple even at low speeds
 - High starting torque
 - High overload capability
 - Wide speed control range with constant power
 - Low space requirement and low weight
 - Reliability
- Main applications for DC drives include:
- Rolling mill drives
 - Wire-drawing machines
 - Extruders and kneaders
 - Presses
 - Elevators and cranes
 - Cableways and lifts
 - Mine hoists
 - Test stand drives

SINAMICS DCM

DC Converter and Control Module

General information

Function

Function	Description
Functions of the closed-loop control in the armature circuit	
Speed setpoint	<p>The source of the speed setpoint and additional setpoints can be freely selected by making the appropriate parameter settings:</p> <ul style="list-style-type: none"> • Entered using analog values 0 to ± 10 V, 0 to ± 20 mA, 4 to 20 mA • Entered via the PROFIBUS fieldbus interface, Ethernet interface for PROFINET (optional) • Using the integrated motorized potentiometer • Using binectors with the functions: Fixed setpoint, jogging, crawl • Entered via serial interfaces of the SINAMICS DC MASTER • Entered via supplementary modules <p>The scaling is realized so that 100 % setpoint (formed from the main setpoint and supplementary setpoints) corresponds to the maximum motor speed.</p> <p>The setpoint can be limited to a minimum and maximum value via a parameter or connector. Further, additional points are provided in the firmware e.g. in order to be able to enter supplementary setpoints before or after the ramp-function generator. The "setpoint enable function" can be selected using a binector. After a parameterizable filter function (PT1 element), the summed setpoint is transferred to the setpoint input of the speed controller. In this case, the ramp-function generator is also active.</p>
Actual speed	<p>One of four sources can be selected as signal for the speed actual value.</p> <ul style="list-style-type: none"> • <i>Analog tachometer</i> The voltage of the tachogenerator at maximum speed can be between 8 and 270 V. Adaptation to the voltage is realized using parameters. • <i>Pulse encoder</i> The pulse encoder type, the number of pulses per revolution and the maximum speed are set using parameters. Encoder signals (symmetrical: with additional, inverted track, unsymmetrical: referred to ground) up to a maximum differential voltage of 27 V can be processed by the evaluation electronics. The rated voltage range (5 or 15 V) for the encoder is selected via parameters. The power supply for the pulse encoder can be taken from the DC Converter for a rated voltage of 15 V. 5 V encoders require an external power supply. The pulse encoder is evaluated across the three tracks: Track 1, track 2 and zero mark. However, pulse encoders without zero mark can also be used. A position actual value can be sensed using the zero mark. The maximum frequency of the encoder pulses can be 300 kHz. It is recommended that pulse encoders with at least 1024 pulses per revolution are used (due to the smooth running operation at low speeds). • <i>Operation without tachometer with EMF control</i> A speed actual value encoder is not required for closed-loop EMF control. In this case, the output voltage of the device is measured in the DC converter. The measured armature voltage is compensated by the internal voltage drop across the motor (IR compensation). The level of compensation is automatically determined during the current controller optimization run. The accuracy of this control method, which is defined by the temperature-dependent change in the motor armature circuit resistance, is approximately 5 %. We recommend that the current controller optimization run is repeated when the motor is in the warm operating condition to achieve a higher degree of precision. The closed-loop EMF control can be used if the requirements on the precision are not so high, if it is not possible to mount an encoder and the motor is operated in the armature voltage control range. Notice: In this mode, EMF-dependent field weakening is not possible. • <i>Freely selectable speed actual value signal</i> For this mode, any connector number can be selected as speed actual value signal. This setting is especially selected if the speed actual value sensing is implemented on a supplementary technology module. Before the speed actual value is transferred to the speed controller, it can be smoothed using a parameterizable smoothing element (PT1 element) and two adjustable bandstop filters. Bandstop filters are used primarily for the purpose of filtering out resonant frequencies caused by mechanical resonance. The resonant frequency and the filter quality factor can be set.
Ramp-function generator	<p>When there is a step change in the setpoint applied at its input, the ramp-function generator converts the setpoint into a signal with a steady rate of rise. Ramp-up time and ramp-down time can be selected independently of one another. In addition, the ramp-function generator has initial and final rounding-off (jerk limiting) that are effective at the beginning and end of the ramp-up time.</p> <p>All of the times for the ramp-function generator can be set independently of one another.</p> <p>Three parameter sets are available for the ramp-function generator times; these can be selected via binary select inputs or a serial interface (via binectors). The ramp-up function generator parameters can be switched over in operation. In addition, a multiplication factor can be applied to the value of parameter set 1 via a connector (to change the ramp-function generator data via a connector). When entering ramp-function generator times with the value zero, the speed setpoint is directly input into the speed controller.</p>

Function (continued)

Function	Description
Functions of the closed-loop control in the armature circuit (continued)	
Speed controller	<p>The speed controller compares the setpoint and actual value of the speed and if there is a deviation, enters an appropriate current setpoint into the current controller (principle: Speed control with lower-level current controller). The speed controller is implemented as PI controller with additional D component that can be selected. Further, a switchable droop function can be parameterized. All of the controller parameters can be adjusted independently of one another. The value for K_p (gain) can be adapted depending on a connector signal (external or internal).</p> <p>In this case, the P gain of the speed controller can be adapted depending on the speed actual value, current actual value, setpoint-actual value distance or the wound roll diameter. This can be pre-controlled in order to achieve a high dynamic performance in the speed control loop. For this purpose, e.g. depending on the friction and the moment of inertia of the drive, a torque setpoint signal can be added after the speed controller. The friction and moment of inertia compensation are determined using an automatic optimization run.</p> <p>The output quantity of the speed controller can be directly adjusted via parameter after the controller has been enabled.</p> <p>Depending on the parameterization, the speed controller can be bypassed and the converter controlled either with closed-loop torque or current control. In addition, it is also possible to switch between speed control/torque control in operation using the "leading/following switchover" selection function. The function can be selected as binector using a binary user-assignable terminal or a serial interface. The torque setpoint is input via a selectable connector and can therefore come from an analog user-assignable terminal or via a serial interface.</p> <p>A limiting controller is active when in the following drive state (torque or current controlled operation). In this case, depending on a speed limit that can be selected using parameters, the limiting controller can intervene in order to prevent the drive accelerating in an uncontrolled fashion. In this case, the drive is limited to an adjustable speed deviation.</p>
Torque limiting	<p>The speed controller output represents the torque setpoint or current setpoint depending on what has been parameterized. In torque-controlled operation, the speed controller output is weighted with the machine flux Φ and transferred to a current limiting stage as a current setpoint. Torque control is applied primarily in field weakening operation in order to limit the maximum motor torque independent of the speed.</p> <p>The following functions are available:</p> <ul style="list-style-type: none"> • Independent setting of positive and negative torque limits using parameters. • Switchover of the torque limit using a binector as a function of a parameterizable switchover speed. • Free input of a torque limit by means of a connector signal, e.g. via an analog input or via serial interface. <p>The lowest specified quantity should always be effective as the actual torque limit. Additional torque setpoints can be added after the torque limit.</p>
Current limiting	<p>The current limit that can be adjusted after the torque limit is used to protect the converter and the motor. The lowest specified quantity is always effective as the actual current limit.</p> <p>The following current limit values can be set:</p> <ul style="list-style-type: none"> • Independent setting of positive and negative current limits using parameters (maximum motor current setting). • Free input of a current limit using a connector, e.g. from an analog input or via a serial interface. • Separate setting of current limit using parameters for stopping and quick stop. • Speed-dependent current limiting: An automatically initiated, speed-dependent reduction of the current limit at high speeds can be parameterized (commutation limit curve of the motor). <p>I^2t monitoring of the power section: The thermal state of the thyristors is calculated for all current values. When the thyristor limit temperature is reached, the unit responds as a function of parameter settings, i.e. the converter current is reduced to the rated DC current or the unit is shut down with a fault message. This function is used to protect the thyristors.</p>
Current controller	<p>The current controller is implemented as PI controller with P gain and integral time that can be set independently from one another. The P and I components can also be deactivated (pure P controller or pure I controller). The current actual value is sensed using a current transformer on the three-phase side and is fed to the current controller via a load resistor and rectification after analog-digital conversion. The resolution is 10 bits for the converter rated current. The current limit output is used as current setpoint.</p> <p>The current controller output transfers the firing angle to the gating unit – the pre-control function is effective in parallel.</p>
Pre-control	<p>The pre-control in the current control loop improves the dynamic performance of the closed-loop control. This allows rise times of between 6 and 9 ms in the current control loop. The pre-control is effective dependent on the current setpoint and EMF of the motor and ensures – for intermittent and continuous current or when the torque direction is reversed – that the required firing angle is quickly transferred as setpoint to the gating unit.</p>
Auto-reversing module	<p>In conjunction with the current control loop, the auto-reversing module (only for units with four-quadrant drives) ensures the logical sequence of all of the operations and processes required to change the torque direction. The torque direction can also be disabled when required via parameter.</p>
Gating unit	<p>The gating unit generates the firing pulses for the power section thyristors in synchronism with the line supply voltage. The synchronization is independent of the speed and the electronics supply and is sensed at the power section. The timing of the firing pulses is defined by the output values of the current controller and the pre-control. The firing angle limit can be set using parameters.</p> <p>In a frequency range from 45 to 65 Hz, the gating unit automatically adapts itself to the actual line frequency.</p>

SINAMICS DCM

DC Converter and Control Module

General information

Function (continued)


Function	Description
Functions of the closed-loop control in the field circuit	
EMF controller	The EMF controller compares the setpoint and actual value of the EMF (induced motor voltage) and enters the setpoint for the field current controller. This therefore permits field weakening control that is dependent on the EMF. The EMF controller operates as PI controller; P and I components can be adjusted independently of one another and/or the controller can be operated as pure P controller or pure I controller. A pre-control function operates in parallel to the EMF controller. Depending on the speed, it pre-controls the field current setpoint using an automatically recorded field characteristic (refer to the optimization runs). There is an adding point after the EMF controller, where the supplementary field current setpoints can be entered either via a connector, via an analog input or a serial interface. The limit is then effective for the field current setpoint. In this case, the field current setpoint can be limited to a minimum and a maximum value that can be set independently from one another. The limit is realized using a parameter or a connector. The minimum for the upper limit or the maximum for the lower limit is effective.
Field current controller	The field current controller is a PI controller – where K_p and T_n can be independently set. It can also be operated as pure P and I controller. A pre-control function operates in parallel to the field current controller. This calculates and sets the firing angle for the field circuit as a function of current setpoint and line supply voltage. The pre-control supports the current controller and ensures that the field circuit has the appropriate dynamic performance.
Gating unit	The gating unit generates the firing pulses for the power section thyristors in synchronism with the line supply voltage in the field circuit. The synchronization is detected in the power section and is therefore independent of the electronics power supply. The timing of the firing pulses is defined by the output values of the current controller and the pre-control. The firing angle limit can be set using parameters. In a frequency range from 45 to 65 Hz, the gating unit automatically adapts itself to the actual line supply voltage.

Communication between drive components

DRIVE-CLiQ	<p>Communication between SINAMICS components is realized using the standard internal SINAMICS interface DRIVE-CLiQ (this is an abbreviation for Drive Component Link with IQ). This couples the Control Unit with the connected drive components (e.g. DC Converter, Terminal Modules etc.).</p> <p>DRIVE-CLiQ provides standard digital interfaces for all SINAMICS drives. This permits modularization of the drive functions and thus increased flexibility for customized solutions (allows power and intelligence to be separated).</p> <p>The DRIVE-CLiQ hardware is based on the Industrial Ethernet standard and uses twisted-pair cables. The DRIVE-CLiQ line provides the transmit and receive signals and also the 24 V power supply.</p> <p>Setpoints and actual values, control commands, status feedback signals and electronic rating plate data of the drive components are transferred via DRIVE-CLiQ. Only original Siemens cables must be used for DRIVE-CLiQ cables. As a result of the special transfer and damping properties, only these cables can guarantee that the system functions perfectly.</p>
SINAMICS Link	<p>SINAMICS Link allows data to be directly exchanged between several (2 to 64) Control Units. A higher-level master is not required.</p> <p>The following Control Units support SINAMICS Link:</p> <ul style="list-style-type: none"> • CU320-2 • Advanced CUD <p>For use of SINAMICS Link, all of the Control Units must be equipped with the CBE20 Communication Board (option G20). In addition, a memory card (options S01, S02) is required for the Advanced CUD. Communication can either be synchronous (only CU320-2) or non-synchronous or a combination of both. Each participant can send and receive up to 16 process data words.</p> <p>For instance, SINAMICS Link can be used for the following applications:</p> <ul style="list-style-type: none"> • Torque distribution for n drives • Setpoint cascading for n drives • Load distribution of drives coupled through a material web • Master/slave function • Couplings between SINAMICS units

Function (continued)

Function	Description
Communication between drive components (continued)	
OALINK	<p>OALINK (Open Application Link) allows two Control Units to exchange data directly. A higher-level master is not required. The following Control Units support the OALINK:</p> <ul style="list-style-type: none"> • CU320-2 • Advanced CUD <p>The communication system is based on DRIVE-CLiQ which means that no hardware components other than the DRIVE-CLiQ line are required. OALINK must be loaded as a technology package.</p> <p>A software license is required when it is installed on the CU320-2. The article number for the Certificate of License (CoL) is 6SL3077-0AA01-0AB0.</p> <p>No license is required on the Control Unit CUD of the SINAMICS DC MASTER.</p> <p>OALINK permits the cyclic transmission of a total of 120 words which can comprise the following data types:</p> <ul style="list-style-type: none"> • Integer16 (1 word) • Integer32 (2 words) • FloatingPoint32 (2 words) <p>For instance, OALINK can be used for the following applications:</p> <ul style="list-style-type: none"> • Torque distribution for n drives • Setpoint cascading for n drives • Load distribution of drives coupled through a material web • Technology expansion for the SINAMICS DCM (CU320-2 as T400 substitute) • Couplings between SINAMICS units

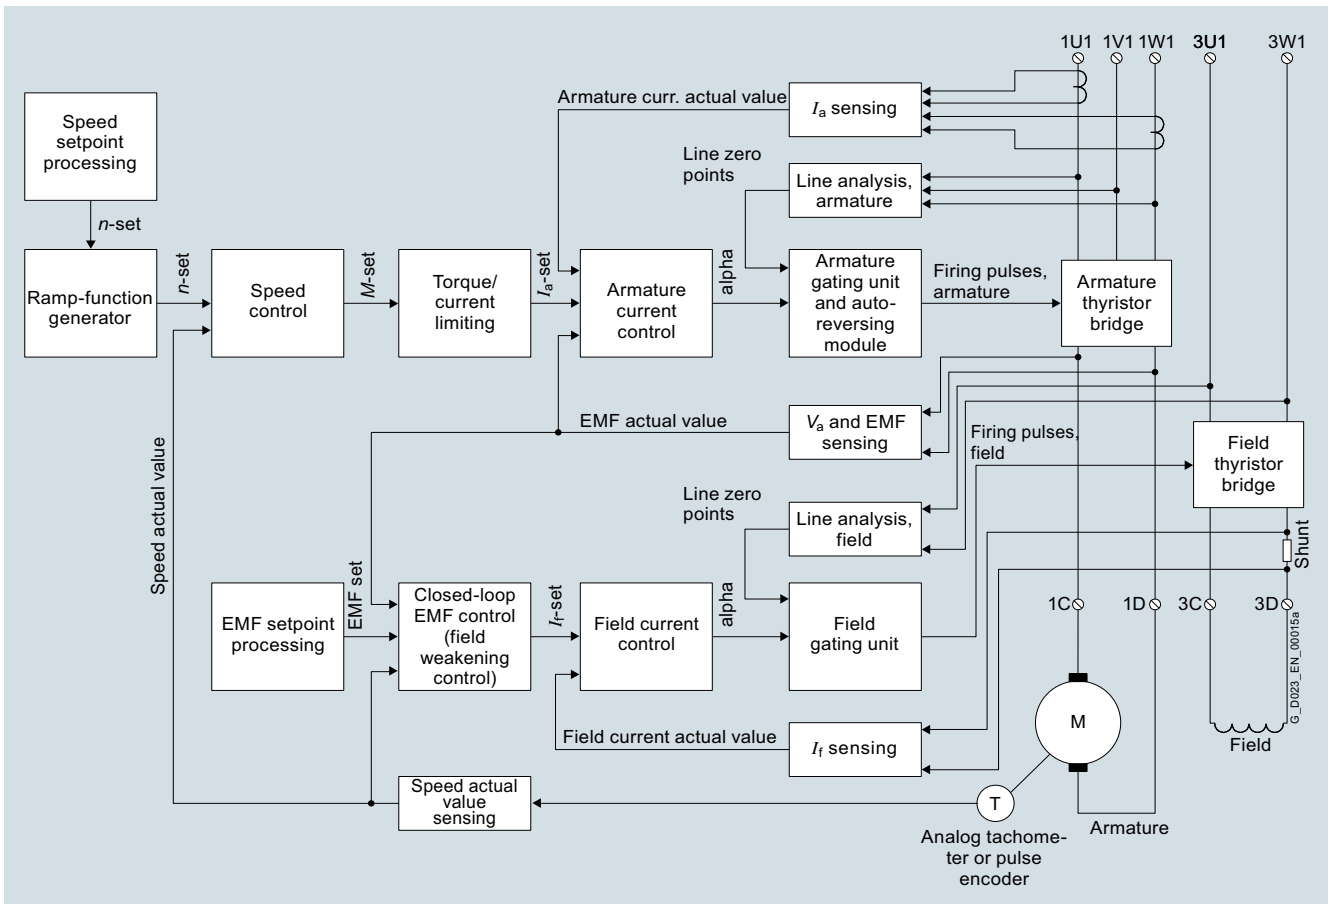Overview, closed-loop control structure

SINAMICS DCM


DC Converter and Control Module

General information

Function (continued)

Single-phase connection

For DC Converters up to 125 A and up to 575 V AC, the full functionality of the devices is available even when supplied through only two conductors.

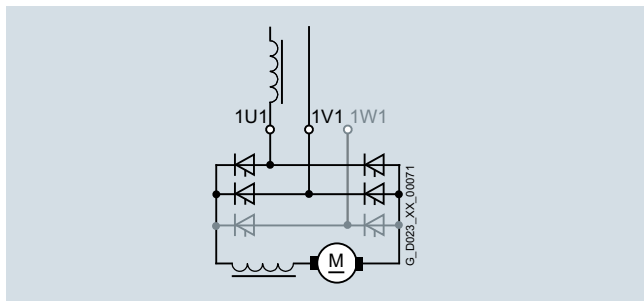

This means, that in a retrofit project for example, a converter with a single-phase connection can be integrated into state-of-the-art communication concepts (TIA) without requiring any changes to the existing machine or plant.

The unit is connected to the line supply via terminals 1U1 and 1V1. It is mandatory that a single-phase commutating reactor or a transformer with 4 % u_k is provided, which only supplies the DC Converter involved.

Commutating reactor and transformer should be selected according to the rated motor current of the armature circuit.

In this B2 circuit, the line current is equal to the DC current in the armature circuit. All of the other line-side drive components should be dimensioned according to this.

Further, due to the higher current ripple when compared to six-pulse operation, a smoothing reactor must be provided in the DC circuit. Please contact the motor manufacturer when dimensioning the smoothing reactor.

The associated technical specifications of the three-phase converter connected to a single phase can be found in section "Technical specifications" under DC Converter. (Compared to three-phase operation, the rated DC current is derated by a factor of 0.7.)

Rated output voltage for single-phase connection

Line supply V	Rated output voltage for single-phase connection	
	Two-quadrant operation V	Four-quadrant operation V
230	180	160
400	320	280
480	385	335
575	460	400

Coolant temperature and installation altitude

Current derating

The permissible coolant temperatures and installation altitudes for SINAMICS DC MASTER as well as the associated maximum permissible load of the DC Converters in continuous operation can be taken from the following table (the load is specified as a % of the rated DC current).

Ambient or coolant temperature	Maximum permissible load of the DC Converter in continuous operation (the load is specified as a % of the rated DC current)									
	Installation altitude above sea level (the derating factors for values in between can be determined using linear interpolation.)									
	1000 m		2000 m		3000 m		4000 m		5000 m	
	Units up to 125 A	Units from 210 A and higher	Units up to 125 A	Units from 210 A and higher	Units up to 125 A	Units from 210 A and higher	Units up to 125 A	Units from 210 A and higher	Units up to 125 A	Units from 210 A and higher
30 °C	100 %			98 %	96 %	88 %	86 %	78 %	78 %	70 %
35 °C	100 %			93 %	90 %	83 %	80 %	73 %		
40 °C	100 %			94 %	88 %	84 %	78 %			
45 °C	100 %		95 %	88 %	83 %					
50 °C	94 %	90 %	82 %	78 %						
55 °C	88 %									

Voltage derating

The units can be operated up to an installation altitude of 4000 m above sea level with the specified rated supply voltages. The line supply voltages may have overvoltage category III with respect to ground. For installation altitudes above 4000 m, in some cases, it will be necessary to reduce the supply voltage or ensure that overvoltage category II is maintained. Detailed information is provided in the operating instructions.

More information

Documentation

The technical documentation includes the following manuals:

- SINAMICS DC MASTER DC Converter Operating Instructions
- SINAMICS DC MASTER Control Module Operating Instructions
- List Manual (parameter list and function diagrams)
- Function Manual SINAMICS Free Function Blocks

Documentation is provided on a DVD when the converter is supplied. German, English, French, Spanish, Italian and Russian are the standard languages. The documentation can be separately ordered as hard copy in the languages specified above.

The manuals include all of the data relevant to SINAMICS DC MASTER units:

- Description
- Technical specifications
- Installation instructions
- Commissioning guide
- Maintenance information
- Function diagrams
- Description of faults and alarms
- Parameter list
- List of connectors and binectors
- Dimensional drawings

Documentation on DVD

The product DVD contains all of the operating instructions, both for DC Converters as well as the Control Module in electronic form as PDF files.

The DVD also includes application documents about the use and application of DC drives, on topics such as

- Axial winders
- 12-pulse applications
- Leading-following switchover (MASTER slave operation)
- SINAMICS DC MASTER as field supply unit
- Engineering tips

These documents are being continually supplemented and expanded.

Additional information and ordering data for the various documents are provided in the catalog section "Services and documentation".

SINAMICS DCM

DC Converter and Control Module

DC Converter

Overview



The series of SINAMICS DC MASTER DC Converters includes the following components:

- Electronics module with Control Unit (CUD) and slot for expansion using another CUD (in a cradle that can be swiveled out)
- Power section with thyristors in a fully-controlled three-phase bridge circuit configuration (two-quadrant drive: B6C or four-quadrant drive: (B6) A (B6) C²⁾)
- Fan (up to 125 A: self-ventilated)
- Single-quadrant field power section with integrated free-wheeling circuit (optionally, also without field or as two-quadrant field for highly dynamic field current changes with integrated field overvoltage protection)
- Electronics power supply
- Standard BOP20 operator panel (AOP30 Advanced Operator Panel as accessory)

Technical specifications

General technical specifications

Relevant standards

EN 50178	Electronic equipment for use in power installations
EN 50274	Low-voltage switchgear and controlgear assemblies: Protection against electric shock – Protection against unintentional direct contact with hazardous live parts
EN 60146-1-1	Semiconductor converters: General requirements and line-commutated converters; specification of basic requirements
EN 61800-1	Adjustable speed electrical power drive systems, Part 1 – (DC drives) General requirements – Rating specifications for low voltage adjustable speed DC power drive systems
EN 61800-3	Adjustable speed electrical power drive systems, Part 3 – EMC product standard including specific test methods
EN 61800-5-1	Adjustable speed electrical power drive systems – Part 5-1: Requirements regarding safety – electrical, thermal, and energy requirements
IEC 62103 (identical to EN 50178)	Electronic equipment for use in power installations
UBC 97	Uniform Building Code

Electrical specifications

Overvoltage category	Category II acc. to EN 61800-5-1 within line supply circuits Category III acc. to EN 61800-5-1 for line supply circuits with respect to the environment (other line supply circuits, housing, electronics)		
Overvoltage strength	Class 1 acc. to EN 50178		
Short-circuit current	Rated supply voltage	Rated DC current	Short-circuit current, max.
	V	A	kA
	400, 480 3 AC	15 ... 1200	65
		1600, 2000	85
		3000	100
	575, 690, 830, 950 3 AC	60 ... 850	65
950 ... 1600		85	
1900 ... 2800		100	
Radio interference suppression	No radio interference suppression according to EN 61800-3		

¹⁾ Conditions:

The closed-loop control (PI control) stability is referred to the rated motor speed and applies when the SINAMICS DC MASTER is in the warm operating condition. This is based on the following preconditions:

- Temperature changes of ± 10 °C
- Line supply voltage changes of +10 % / -5 % of the rated input voltage
- Temperature coefficient of the tachometer generator with temperature compensation 0.15 ‰ every 10 °C (for analog tachometer generators only)
- Constant setpoint

²⁾

In two-quadrant operation, the drive can operate in "driving" mode in one direction of rotation and in "braking" mode with regenerative feedback in the opposite direction of rotation. In four-quadrant operation, the drive can operate in "driving" mode and in "braking" mode with regenerative feedback in both directions of rotation.

Technical specifications (continued)

General technical specifications

Mechanical data

Degree of protection	IP00 acc. to EN 60529; IP20 with accessories "Mounting kit to upgrade to IP20" for units up to 850 A
Protection class	Class 1 acc. to EN 61140
Cooling method	<ul style="list-style-type: none"> Units ≤ 125 A rated DC current: Permissible ambient temperature in operation Units ≥ 210 A rated DC current: Permissible ambient temperature in operation
Closed-loop control stability	<ul style="list-style-type: none"> for pulse encoder operation and digital setpoint for analog tachometer and analog setpoint ¹⁾
MTBF	> 170000 h

Environmental conditions

Permissible ambient temperature during storage and transport	-40 ... +70 °C
Permissible humidity	Relative air humidity ≤ 95 % (75 % at 17 °C as average annual value, 95 % at 24 °C max., condensation not permissible)
Climate class	3K3 acc. to EN 60721-3-3
Insulation	Pollution degree 2 according to EN 61800-5-1 Condensation not permissible
Installation altitude	≤ 1000 m above sea level (100 % load capability) > 1000 ... 5000 m above sea level (see under "Coolant temperature and installation altitude" on page 3/8)

Mechanical strength

	Storage	Transport	Operation
Vibratory load	1M2 acc. to EN 60721-3-1 (dropping not permissible)	2M2 acc. to EN 60721-3-2 (dropping not permissible)	Constant deflection: 0.075 mm at 10 to 58 Hz Constant acceleration: 10 m/s ² at > 58 to 200 Hz (testing and measuring techniques acc. to EN 60068-2-6, Fc)
Shock load			100 m/s ² at 11 ms (testing and measuring techniques acc. to EN 60068-2-27, Ea)

Approvals

UL/cUL	UL file No.: E203250
UL 508 C (UL Standard for Power Conversion Equipment)	Certification of the units up to and including 575 V
GOST	
Lloyd's Register	In order to maintain the important limit values for marine certification, radio interference suppression filters should be used (see "Accessories and supplementary components") and option M08 (coated PCBs) should be selected.
Det Norske Veritas	
American Bureau of Shipping	
Germanischer Lloyd	

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 400 V 3 AC, 60 to 280 A, two-quadrant operation

	Type	Type				
		6RA8025-6DS22-0AA0	6RA8028-6DS22-0AA0	6RA8031-6DS22-0AA0	6RA8075-6DS22-0AA0	6RA8078-6DS22-0AA0
Rated armature supply voltage ¹⁾	V	400 3 AC (+15/-20 %)				
Rated armature input current	A	50	75	104	174	232
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	Self-ventilated			24 V DC internal	
Rated fan current	A				Internal supply	
Cooling air requirement	m ³ /h				300	
Sound pressure level ²⁾	dB (A)				52.4	
Rated field supply voltage ¹⁾	V	400 2 AC (+15/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	485				
Rated DC current	A	60	90	125	210	280
Overload capability	$x \times I_n$	1.8				
Rated power	kW	29	44	61	102	136
Power loss at rated DC current	kW	0.25	0.36	0.41	0.69	0.81
Rated DC field voltage ¹⁾	V	Max. 325				
Rated DC field current	A	10			15	
Normal ambient temperature in operation ³⁾	°C	0 ... +45			0 ... +40	
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ³⁾		≤ 1000 m for rated DC current				
Dimensions						
• Width	mm	268				
• Height	mm	385				
• Depth	mm	252				
Weight, approx.	kg	10	14			15

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

Data for single-phase connection

	Type	Type		
		6RA8025-6DS22-0AA0	6RA8028-6DS22-0AA0	6RA8031-6DS22-0AA0
Rated DC voltage	V	320		
Rated DC current	A	42.0	63.0	87.5

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 400 V 3 AC, 400 to 1200 A, two-quadrant operation

	Type	Type			
		6RA8081-6DS22-0AA0	6RA8085-6DS22-0AA0	6RA8087-6DS22-0AA0	6RA8091-6DS22-0AA0
Rated armature supply voltage ¹⁾	V	400 3 AC (+15/-20 %)			
Rated armature input current	A	332	498	706	996
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A			
Rated fan supply voltage	V	400 V 3 AC ± 10 % (50 Hz) 460 V 3 AC ± 10 % (60 Hz)			
Rated fan current	A	0.23 ³⁾			0.3 ³⁾
Cooling air requirement	m ³ /h	600			1000
Sound pressure level ²⁾	dB (A)	64.5			
Rated field supply voltage ¹⁾	V	400 2 AC (+15/-20 %)			480 2 AC (+10/-20 %)
Rated frequency	Hz	45 ... 65			
Rated DC voltage ¹⁾	V	485			
Rated DC current	A	400	600	850	1200
Overload capability	$x \times I_n$	1.8			
Rated power	kW	194	291	412	582
Power loss at rated DC current	kW	1.37	1.84	2.47	4.11
Rated DC field voltage ¹⁾	V	Max. 325			Max. 390
Rated DC field current	A	25		30	40
Normal ambient temperature in operation ⁴⁾	°C	0 ... +40			
Storage and transport temperature	°C	-40 ... +70			
Installation altitude above sea level ⁴⁾		≤ 1000 m for rated DC current			
Dimensions					
• Width	mm	268			
• Height	mm	625		700	785
• Depth	mm	275		311	435
Weight, approx.	kg	26	28	38	78

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 400 V 3 AC, 1600 to 3000 A, two-quadrant operation

	Type	6RA8093-4DS22-0AA0			6RA8095-4DS22-0AA0			6RA8098-4DS22-0AA0		
Rated armature supply voltage ¹⁾	V	400 3 AC (+15/-20 %)			400 3 AC (+15/-20 %)			400 3 AC (+10/-20 %)		
Rated armature input current	A	1328			1660			2490		
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A								
Rated fan supply voltage	V	400 V 3 AC ± 10 % (50 Hz) 460 V 3 AC ± 10 % (60 Hz)								
Rated fan current	A	1 ³⁾								
Cooling air requirement	m ³ /h	2400								
Sound pressure level ²⁾	dB (A)	75.6								
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)								
Rated frequency	Hz	45 ... 65								
Rated DC voltage ¹⁾	V	485								
Rated DC current	A	1600			2000			3000		
Overload capability	$x \times I_n$	1.8								
Rated power	kW	776			970			1455		
Power loss at rated DC current	kW	5.68			6.78			10.64		
Rated DC field voltage ¹⁾	V	Max. 390								
Rated DC field current	A	40								
Normal ambient temperature in operation ⁴⁾	°C	0 ... +40								
Storage and transport temperature	°C	-40 ... +70								
Installation altitude above sea level ⁴⁾		≤ 1000 m for rated DC current								
Dimensions										
• Width	mm	453								
• Height	mm	883								
• Depth	mm	505								
Weight, approx.	kg	135						165		

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type RH28M-2DK.3F.1R in units 6RA8090, 6RA8091, 6RA8093, and 6RA8095 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0KA1 or 3RV1011-1AA1, set to 1.25 A.

⁴⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 480 V 3 AC, 60 to 280 A, two-quadrant operation

	Type	Type				
		6RA8025-6FS22-0AA0	6RA8028-6FS22-0AA0	6RA8031-6FS22-0AA0	6RA8075-6FS22-0AA0	6RA8078-6FS22-0AA0
Rated armature supply voltage ¹⁾	V	480 3 AC (+10/-20 %)				
Rated armature input current	A	50	75	104	174	232
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	Self-ventilated			24 V DC internal	
Rated fan current	A				Internal supply	
Cooling air requirement	m ³ /h				300	
Sound pressure level ²⁾	dB (A)				52.4	
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	575				
Rated DC current	A	60	90	125	210	280
Overload capability	$x \times I_n$	1.8				
Rated power	kW	35	52	72	121	161
Power loss at rated DC current	kW	0.30	0.38	0.43	0.72	0.81
Rated DC field voltage ¹⁾	V	Max. 390				
Rated DC field current	A	10			15	
Normal ambient temperature in operation ³⁾	°C	0 ... +45			0 ... +40	
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ³⁾		≤ 1000 m for rated DC current				
Dimensions						
• Width	mm	268				
• Height	mm	385				
• Depth	mm	252				
Weight, approx.	kg	11	14			15

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

Data for single-phase connection

	Type	Type		
		6RA8025-6FS22-0AA0	6RA8028-6FS22-0AA0	6RA8031-6FS22-0AA0
Rated DC voltage	V	385		
Rated DC current	A	42.0	63.0	87.5

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 480 V 3 AC, 450 to 1200 A, two-quadrant operation

	Type	Type			
		6RA8082-6FS22-0AA0	6RA8085-6FS22-0AA0	6RA8087-6FS22-0AA0	6RA8091-6FS22-0AA0
Rated armature supply voltage ¹⁾	V	480 3 AC (+10/-20 %)			
Rated armature input current	A	374	498	706	996
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A			
Rated fan supply voltage	V	400 V 3 AC \pm 10 % (50 Hz) 460 V 3 AC \pm 10 % (60 Hz)			
Rated fan current	A	0.23 ³⁾			0.3 ³⁾
Cooling air requirement	m ³ /h	600			1000
Sound pressure level ²⁾	dB (A)	64.5			
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)			
Rated frequency	Hz	45 ... 65			
Rated DC voltage ¹⁾	V	575			
Rated DC current	A	450	600	850	1200
Overload capability	$x \times I_n$	1.8			
Rated power	kW	259	345	489	690
Power loss at rated DC current	kW	1.58	1.91	2.60	4.24
Rated DC field voltage ¹⁾	V	Max. 390			
Rated DC field current	A	25		30	40
Normal ambient temperature in operation ⁴⁾	°C	0 ... +40			
Storage and transport temperature	°C	-40 ... +70			
Installation altitude above sea level ⁴⁾		\leq 1000 m for rated DC current			
Dimensions					
• Width	mm	268			
• Height	mm	625			785
• Depth	mm	275			435
Weight, approx.	kg	28			78

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 575 V 3 AC, 60 to 800 A, two-quadrant operation

	Type	Type					
		6RA8025-6GS22-0AA0	6RA8031-6GS22-0AA0	6RA8075-6GS22-0AA0	6RA8081-6GS22-0AA0	6RA8085-6GS22-0AA0	6RA8087-6GS22-0AA0
Rated armature supply voltage ¹⁾	V	575 3 AC (+10/-20 %)					
Rated armature input current	A	50	104	174	332	498	664
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A					
Rated fan supply voltage	V	Self-ventilated		24 V DC internal	400 V 3 AC ± 10 % (50 Hz) 460 V 3 AC ± 10 % (60 Hz)		
Rated fan current	A			Internal supply	0.23 ³⁾		
Cooling air requirement	m ³ /h			300	600		
Sound pressure level ²⁾	dB (A)			52.4	64.5		
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)					
Rated frequency	Hz	45 ... 65					
Rated DC voltage ¹⁾	V	690					
Rated DC current	A	60	125	210	400	600	800
Overload capability	$x \times I_n$	1.8					
Rated power	kW	41	86	145	276	414	552
Power loss at rated DC current	kW	0.27	0.46	0.74	1.60	2.00	2.69
Rated DC field voltage ¹⁾	V	Max. 390					
Rated DC field current	A	10		15	25		30
Normal ambient temperature in operation ⁴⁾	°C	0 ... +45		0 ... +40			
Storage and transport temperature	°C	-40 ... +70					
Installation altitude above sea level ⁴⁾		≤ 1000 m for rated DC current					
Dimensions							
• Width	mm	268					
• Height	mm	385			625		700
• Depth	mm	252			275		311
Weight, approx.	kg	11	14		26	28	38

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

Data for single-phase connection

	Type	Type	
		6RA8025-6GS22-0AA0	6RA8031-6GS22-0AA0
Rated DC voltage	V	460	
Rated DC current	A	42.0	87.5

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 575 V 3 AC, 1100 to 2800 A, two-quadrant operation

	Type	Type				
		6RA8090-6GS22-0AA0	6RA8093-4GS22-0AA0	6RA8095-4GS22-0AA0	6RA8096-4GS22-0AA0	6RA8097-4GS22-0AA0
Rated armature supply voltage ¹⁾	V	575 3 AC (+10/-20 %)				
Rated armature input current	A	913	1328	1660	1826	2324
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	400 V 3 AC \pm 10 % (50 Hz) 460 V 3 AC \pm 10 % (60 Hz)				
Rated fan current	A	0.3 ³⁾	1 ⁴⁾			
Cooling air requirement	m ³ /h	1000	2400			
Sound pressure level ²⁾	dB (A)	64.5	75.6			
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	690				
Rated DC current	A	1100	1600	2000	2200	2800
Overload capability	$x \times I_n$	1.8				
Rated power	kW	759	1104	1380	1518	1932
Power loss at rated DC current	kW	4.02	6.04	7.07	7.39	10.53
Rated DC field voltage ¹⁾	V	Max. 390				
Rated DC field current	A	40				
Normal ambient temperature in operation ⁵⁾	°C	0 ... +40				
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ⁵⁾		\leq 1000 m for rated DC current				
Dimensions						
• Width	mm	268	453			
• Height	mm	785	883			
• Depth	mm	435	505			
Weight, approx.	kg	78	135		165	

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For fan motor type RH28M-2DK.3F.1R in units 6RA8090, 6RA8091, 6RA8093, and 6RA8095 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0KA1 or 3RV1011-1AA1, set to 1.25 A.

⁵⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 690 V 3 AC, 720 to 2600 A, two-quadrant operation

	Type	Type				
		6RA8086-6KS22-0AA0	6RA8090-6KS22-0AA0	6RA8093-4KS22-0AA0	6RA8095-4KS22-0AA0	6RA8097-4KS22-0AA0
Rated armature supply voltage ¹⁾	V	690 3 AC (+10/-20 %)				
Rated armature input current	A	598	830	1245	1660	2158
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	400 V 3 AC ± 10 % (50 Hz) 460 V 3 AC ± 10 % (60 Hz)				
Rated fan current	A	0.23 ³⁾	0.3 ³⁾	1 ⁴⁾		
Cooling air requirement	m ³ /h	600	1000	2400		
Sound pressure level ²⁾	dB (A)	64.5			75.6	
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	830				
Rated DC current	A	720	1000	1500	2000	2600
Overload capability	$x \times I_n$	1.8				
Rated power	kW	598	830	1245	1660	2158
Power loss at rated DC current	kW	2.77	3.96	6.67	8.16	10.30
Rated DC field voltage ¹⁾	V	Max. 390				
Rated DC field current	A	30	40			
Normal ambient temperature in operation ⁵⁾	°C	0 ... +40				
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ⁵⁾		≤ 1000 m for rated DC current				
Dimensions						
• Width	mm	268		453		
• Height	mm	700	785	883		
• Depth	mm	311	435	505		
Weight, approx.	kg	38	78	135		165

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For fan motor type RH28M-2DK.3F.1R in units 6RA8090, 6RA8091, 6RA8093, and 6RA8095 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0KA1 or 3RV1011-1AA1, set to 1.25 A.

⁵⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 830 V 3 AC, 950 to 1900 A and 950 V 3 AC, 2200 A, two-quadrant operation

	Type	Type			
		6RA8088-6LS22-0AA0	6RA8093-4LS22-0AA0	6RA8095-4LS22-0AA0	6RA8096-4MS22-0AA0
Rated armature supply voltage ¹⁾	V	830 3 AC (+10/-20 %)			950 3 AC (+15/-20 %)
Rated armature input current	A	789	1245	1577	1826
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A			
Rated fan supply voltage	V	400 V 3 AC ± 10 % (50 Hz) 460 V 3 AC ± 10 % (60 Hz)			
Rated fan current	A	0.3 ³⁾	1 ⁴⁾		
Cooling air requirement	m ³ /h	1000	2400		
Sound pressure level ²⁾	dB (A)	64.5	75.6		
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)			
Rated frequency	Hz	45 ... 65			
Rated DC voltage ¹⁾	V	1000			1140
Rated DC current	A	950	1500	1900	2200
Overload capability	$x \times I_n$	1.8			
Rated power	kW	950	1500	1900	2508
Power loss at rated DC current	kW	4.22	7.12	8.67	11.34
Rated DC field voltage ¹⁾	V	Max. 390			
Rated DC field current	A	40			
Normal ambient temperature in operation ⁵⁾	°C	0 ... +40			
Storage and transport temperature	°C	-40 ... +70			
Installation altitude above sea level ⁵⁾		≤ 1000 m for rated DC current			
Dimensions					
• Width	mm	268	453		
• Height	mm	785	883		
• Depth	mm	435	505		
Weight, approx.	kg	78	135		165

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

- ¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).
- ²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

- ³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.
- ⁴⁾ For fan motor type RH28M-2DK.3F.1R in units 6RA8090, 6RA8091, 6RA8093, and 6RA8095 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0KA1 or 3RV1011-1AA1, set to 1.25 A.
- ⁵⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 400 V 3 AC, 15 to 125 A, four-quadrant operation

	Type	Type				
		6RA8013-6DV62-0AA0	6RA8018-6DV62-0AA0	6RA8025-6DV62-0AA0	6RA8028-6DV62-0AA0	6RA8031-6DV62-0AA0
Rated armature supply voltage ¹⁾	V	400 3 AC (+15/-20 %)				
Rated armature input current	A	12	25	50	75	104
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	Self-ventilated				
Rated fan current	A					
Cooling air requirement	m ³ /h					
Sound pressure level ²⁾	dB (A)					
Rated field supply voltage ¹⁾	V	400 2 AC (+15/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	420				
Rated DC current	A	15	30	60	90	125
Overload capability	$x \times I_n$	1.8				
Rated power	kW	6.3	12.6	25	38	53
Power loss at rated DC current	kW	0.13	0.18	0.25	0.32	0.41
Rated DC field voltage ¹⁾	V	Max. 325				
Rated DC field current	A	3	5	10		
Normal ambient temperature in operation ³⁾	°C	0 ... +45				
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ³⁾		≤ 1000 m for rated DC current				
Dimensions						
• Width	mm	268				
• Height	mm	385				
• Depth	mm	221			252	
Weight, approx.	kg	11			14	

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

Data for single-phase connection

	Type	Type				
		6RA8013-6DV62-0AA0	6RA8018-6DV62-0AA0	6RA8025-6DV62-0AA0	6RA8028-6DV62-0AA0	6RA8031-6DV62-0AA0
Rated DC voltage	V	280				
Rated DC current	A	10.5	21.0	42.0	63.0	87.5

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 400 V 3 AC, 210 to 850 A, four-quadrant operation

	Type	Type				
		6RA8075-6DV62-0AA0	6RA8078-6DV62-0AA0	6RA8081-6DV62-0AA0	6RA8085-6DV62-0AA0	6RA8087-6DV62-0AA0
Rated armature supply voltage ¹⁾	V	400 3 AC (+15/-20 %)				
Rated armature input current	A	174	232	332	498	706
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	24 V DC internal			400 V 3 AC ± 10 % (50 Hz) 460 V 3 AC ± 10 % (60 Hz)	
Rated fan current	A	Internal supply			0.23 ³⁾	
Cooling air requirement	m ³ /h	300			600	
Sound pressure level ²⁾	dB (A)	52.4			64.5	
Rated field supply voltage ¹⁾	V	400 2 AC (+15/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	420				
Rated DC current	A	210	280	400	600	850
Overload capability	$x \times I_n$	1.8				
Rated power	kW	88	118	168	252	357
Power loss at rated DC current	kW	0.69	0.81	1.37	1.84	2.47
Rated DC field voltage ¹⁾	V	Max. 325				
Rated DC field current	A	15		25		30
Normal ambient temperature in operation ⁴⁾	°C	0 ... +40				
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ⁴⁾		≤ 1000 m for rated DC current				
Dimensions						
• Width	mm	268				
• Height	mm	385			625	
• Depth	mm	252			275	
Weight, approx.	kg	15			26	
					31	
					42	

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 400 V 3 AC, 1200 to 3000 A, four-quadrant operation

	Type	Type			
		6RA8091-6DV62-0AA0	6RA8093-4DV62-0AA0	6RA8095-4DV62-0AA0	6RA8098-4DV62-0AA0
Rated armature supply voltage ¹⁾	V	400 3 AC (+15/-20 %)			400 3 AC (+10/-20 %)
Rated armature input current	A	996	1328	1660	2490
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A			
Rated fan supply voltage	V	400 V 3 AC \pm 10 % (50 Hz) 460 V 3 AC \pm 10 % (60 Hz)			
Rated fan current	A	0.3 ³⁾	1 ⁴⁾		
Cooling air requirement	m ³ /h	1000	2400		
Sound pressure level ²⁾	dB (A)	64.5	75.6		
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)			
Rated frequency	Hz	45 ... 65			
Rated DC voltage ¹⁾	V	420			
Rated DC current	A	1200	1600	2000	3000
Overload capability	$x \times I_n$	1.8			
Rated power	kW	504	672	840	1260
Power loss at rated DC current	kW	4.11	5.68	6.78	10.64
Rated DC field voltage ¹⁾	V	Max. 390			
Rated DC field current	A	40			
Normal ambient temperature in operation ⁴⁾	°C	0 ... +40			
Storage and transport temperature	°C	-40 ... +70			
Installation altitude above sea level ⁴⁾		\leq 1000 m for rated DC current			
Dimensions					
• Width	mm	268	453		
• Height	mm	785	883		
• Depth	mm	435	505		
Weight, approx.	kg	78	155		185

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 480 V 3 AC, 15 to 210 A, four-quadrant operation

	Type	Type						
		6RA8013-6FV62-0AA0	6RA8018-6FV62-0AA0	6RA8025-6FV62-0AA0	6RA8028-6FV62-0AA0	6RA8031-6FV62-0AA0	6RA8075-6FV62-0AA0	
Rated armature supply voltage ¹⁾	V	480 3 AC (+15/-20 %)		480 3 AC (+10/-20 %)				
Rated armature input current	A	12	25	50	75	104	174	
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A						
Rated fan supply voltage	V	Self-ventilated						24 V DC internal
Rated fan current	A							Internal supply
Cooling air requirement	m ³ /h							300
Sound pressure level ²⁾	dB (A)							52.4
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)						
Rated frequency	Hz	45 ... 65						
Rated DC voltage ¹⁾	V	500						
Rated DC current	A	15	30	60	90	125	210	
Overload capability	$x \times I_n$	1.8						
Rated power	kW	6	15	30	45	63	105	
Power loss at rated DC current	kW	0.13	0.19	0.30	0.34	0.43	0.72	
Rated DC field voltage ¹⁾	V	Max. 390						
Rated DC field current	A	3	5	10	10	10	15	
Normal ambient temperature in operation ³⁾	°C	0 ... +45						0 ... +40
Storage and transport temperature	°C	-40 ... +70						
Installation altitude above sea level ³⁾		≤ 1000 m for rated DC current						
Dimensions								
• Width	mm	268						
• Height	mm	385						
• Depth	mm	221				252		
Weight, approx.	kg	11			14		15	

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

Data for single-phase connection

	Type	Type				
		6RA8013-6FV62-0AA0	6RA8018-6FV62-0AA0	6RA8025-6FV62-0AA0	6RA8028-6FV62-0AA0	6RA8031-6FV62-0AA0
Rated DC voltage	V	335				
Rated DC current	A	10.5	21.0	42.0	63.0	87.5

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 480 V 3 AC, 280 to 1200 A, four-quadrant operation

	Type	6RA8078-6FV62-0AA0				
		6RA8078-6FV62-0AA0	6RA8082-6FV62-0AA0	6RA8085-6FV62-0AA0	6RA8087-6FV62-0AA0	6RA8091-6FV62-0AA0
Rated armature supply voltage ¹⁾	V	480 3 AC (+10/-20 %)				
Rated armature input current	A	232	374	498	706	996
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	24 V DC internal	400 V 3 AC \pm 10 % (50 Hz) 460 V 3 AC \pm 10 % (60 Hz)			
Rated fan current	A	Internal supply	0.23 ³⁾		0.3 ³⁾	
Cooling air requirement	m ³ /h	300	600		1000	
Sound pressure level ²⁾	dB (A)	52.4	64.5			
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	500				
Rated DC current	A	280	450	600	850	1200
Overload capability	$x \times I_n$	1.8				
Rated power	kW	140	225	300	425	600
Power loss at rated DC current	kW	0.81	1.58	1.91	2.60	4.24
Rated DC field voltage ¹⁾	V	Max. 390				
Rated DC field current	A	15	25	25	30	40
Normal ambient temperature in operation ⁴⁾	°C	0 ... +40				
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ⁴⁾		\leq 1000 m for rated DC current				
Dimensions						
• Width	mm	268				
• Height	mm		625		700	785
• Depth	mm	252	275		311	435
Weight, approx.	kg	15	31		42	78

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 575 V 3 AC, 60 to 850 A, four-quadrant operation

	Type	Type						
		6RA8025-6GV62-0AA0	6RA8031-6GV62-0AA0	6RA8075-6GV62-0AA0	6RA8081-6GV62-0AA0	6RA8085-6GV62-0AA0	6RA8087-6GV62-0AA0	
Rated armature supply voltage ¹⁾	V	575 3 AC (+10/-20 %)						
Rated armature input current	A	50	104	174	332	498	706	
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A						
Rated fan supply voltage	V	Self-ventilated		24 V DC internal	400 V 3 AC ± 10 % (50 Hz) 460 V 3 AC ± 10 % (60 Hz)			
Rated fan current	A			Internal supply	0.23 ³⁾			
Cooling air requirement	m ³ /h				300			
Sound pressure level ²⁾	dB (A)				52.4			
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)						
Rated frequency	Hz	45 ... 65						
Rated DC voltage ¹⁾	V	600						
Rated DC current	A	60	125	210	400	600	850	
Overload capability	$x \times I_n$	1.8						
Rated power	kW	36	75	126	240	360	510	
Power loss at rated DC current	kW	0.27	0.46	0.74	1.60	2.00	2.83	
Rated DC field voltage ¹⁾	V	Max. 390						
Rated DC field current	A	10	10	15	25	25	30	
Normal ambient temperature in operation ⁴⁾	°C	0 ... +45		0 ... +40				
Storage and transport temperature	°C	-40 ... +70						
Installation altitude above sea level ⁴⁾		≤ 1000 m for rated DC current						
Dimensions								
• Width	mm	268						
• Height	mm	385				65		700
• Depth	mm	252				275		311
Weight, approx.	kg	11	14	15	26	31	42	

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

Data for single-phase connection

	Type	Type	
		6RA8025-6GV62-0AA0	6RA8031-6GV62-0AA0
Rated DC voltage	V	400	
Rated DC current	A	42.0	87.5

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 575 V 3 AC, 1100 to 2800 A, four-quadrant operation

	Type	Type				
		6RA8090-6GV62-0AA0	6RA8093-4GV62-0AA0	6RA8095-4GV62-0AA0	6RA8096-4GV62-0AA0	6RA8097-4GV62-0AA0
Rated armature supply voltage ¹⁾	V	575 3 AC (+10/-20 %)				
Rated armature input current	A	913	1328	1660	1826	2324
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	400 V 3 AC ± 10 % (50 Hz) 460 V 3 AC ± 10 % (60 Hz)				
Rated fan current	A	0.3 ³⁾	1 ⁴⁾			
Cooling air requirement	m ³ /h	1000	2400			
Sound pressure level ²⁾	dB (A)	64.5	75.6			
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	600				
Rated DC current	A	1100	1600	2000	2200	2800
Overload capability	$x \times I_n$	1.8				
Rated power	kW	660	960	1200	1320	1680
Power loss at rated DC current	kW	4.02	6.04	7.07	7.39	10.53
Rated DC field voltage ¹⁾	V	Max. 390				
Rated DC field current	A	40				
Normal ambient temperature in operation ⁵⁾	°C	0 ... +40				
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ⁵⁾		≤ 1000 m for rated DC current				
Dimensions						
• Width	mm	268	453			
• Height	mm	785	883			
• Depth	mm	435	505			
Weight, approx.	kg	78	155		185	

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).
²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.
⁴⁾ For fan motor type RH28M-2DK.3F.1R in units 6RA8090, 6RA8091, 6RA8093, and 6RA8095 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0KA1 or 3RV1011-1AA1, set to 1.25 A.
⁵⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Technical specifications (continued)

SINAMICS DC MASTER converters for 690 V 3 AC, 760 to 2600 A, four-quadrant operation

	Type	Type				
		6RA8086-6KV62-0AA0	6RA8090-6KV62-0AA0	6RA8093-4KV62-0AA0	6RA8095-4KV62-0AA0	6RA8097-4KV62-0AA0
Rated armature supply voltage ¹⁾	V	690 3 AC (+10/-20 %)				
Rated armature input current	A	631	830	1245	1660	2158
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A				
Rated fan supply voltage	V	400 V 3 AC \pm 10 % (50 Hz) 460 V 3 AC \pm 10 % (60 Hz)				
Rated fan current	A	0.23 ³⁾	0.3 ³⁾	1 ⁴⁾		
Cooling air requirement	m ³ /h	600	1000	2400		
Sound pressure level ²⁾	dB (A)	64.5			75.6	
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)				
Rated frequency	Hz	45 ... 65				
Rated DC voltage ¹⁾	V	725				
Rated DC current	A	760	1000	1500	2000	2600
Overload capability	$x \times I_n$	1.8				
Rated power	kW	551	725	1088	1450	1885
Power loss at rated DC current	kW	2.90	3.96	6.67	8.16	10.30
Rated DC field voltage ¹⁾	V	Max. 390				
Rated DC field current	A	30	40			
Normal ambient temperature in operation ⁵⁾	°C	0 ... +40				
Storage and transport temperature	°C	-40 ... +70				
Installation altitude above sea level ⁵⁾		\leq 1000 m for rated DC current				
Dimensions						
• Width	mm	268		453		
• Height	mm	700	785	883		
• Depth	mm	311	435	505		
Weight, approx.	kg	42	78	155		185

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).

²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.

⁴⁾ For fan motor type RH28M-2DK.3F.1R in units 6RA8090, 6RA8091, 6RA8093, and 6RA8095 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0KA1 or 3RV1011-1AA1, set to 1.25 A.

⁵⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

Technical specifications (continued)

SINAMICS DC MASTER converters for 830 V 3 AC, 950 to 1900 A and 950 V 3 AC, 2200 A, four-quadrant operation

	Type	Type			
		6RA8088-6LV62-0AA0	6RA8093-4LV62-0AA0	6RA8095-4LV62-0AA0	6RA8096-4MV62-0AA0
Rated armature supply voltage ¹⁾	V	830 3 AC (+10/-20 %)			950 3 AC (+15/-20 %)
Rated armature input current	A	789	1245	1577	1826
Rated supply voltage, electronics power supply	V	380 (-25 %) ... 480 (+10 %) 2 AC; $I_n = 1$ A or 190 (-25 %) ... 240 (+10 %) 2 AC; $I_n = 2$ A			
Rated fan supply voltage	V	400 V 3 AC \pm 10 % (50 Hz) 460 V 3 AC \pm 10 % (60 Hz)			
Rated fan current	A	0.3 ³⁾	1 ⁴⁾		
Cooling air requirement	m ³ /h	1000	2400		
Sound pressure level ²⁾	dB (A)	64.5	75.6		
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)			
Rated frequency	Hz	45 ... 65			
Rated DC voltage ¹⁾	V	875			1000
Rated DC current	A	950	1500	1900	2200
Overload capability	$x \times I_n$	1.8			
Rated power	kW	831	1313	1663	2200
Power loss at rated DC current	kW	4.22	7.12	8.67	11.34
Rated DC field voltage ¹⁾	V	Max. 390			
Rated DC field current	A	40			
Normal ambient temperature in operation ⁵⁾	°C	0 ... +40			
Storage and transport temperature	°C	-40 ... +70			
Installation altitude above sea level ⁵⁾		\leq 1000 m for rated DC current			
Dimensions					
• Width	mm	268	453		
• Height	mm	785	883		
• Depth	mm	435	505		
Weight, approx.	kg	78	155		185

Note:

Detailed dimensional drawings in PDF and DXF format are available on the Internet at <http://support.automation.siemens.com/WW/view/en/81717045>.

¹⁾ The armature/field supply voltage may be lower than the rated armature/field voltage (set by parameter). A minimum input voltage of 50 V is permissible for units with a rated voltage of 400 V, 480 V and 575 V, or 85 V for higher rated voltages. The output voltage is reduced accordingly. The specified DC output voltage can be maintained up to an undervoltage of 5 % of the line supply voltage (rated armature/field supply voltage).
²⁾ Fan noise for a unit installed in an IP20 electrical cabinet (door closed, 50 Hz operation or operation at 24 V DC for units with an internal supply).

³⁾ For fan motor type R2D220-AB02-19 in units 6RA8081, 6RA8085, and 6RA8087 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0DA1 or 3RV1011-0EA1, set to 0.3 A.
⁴⁾ For fan motor type RH28M-2DK.3F.1R in units 6RA8090, 6RA8091, 6RA8093, and 6RA8095 with a rated voltage of 400 V or 575 V, UL systems require a Siemens motor circuit breaker of type 3RV1011-0KA1 or 3RV1011-1AA1, set to 1.25 A.
⁵⁾ For derating factors at higher temperatures and installation altitudes, see page 3/8.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Selection and ordering data

DC Converters for two-quadrant operation

Rated data				Field circuit		DC Converter	Fuses		Field circuit			
Armature circuit		Rated DC current	Rated power	Field circuit		Article No.	Armature circuit		Field circuit			
Rated supply voltage ¹⁾	Rated DC voltage			Rated supply voltage ¹⁾	Rated DC current		Phase	DC current	2 each			
V	V	A	kW	V	A		Type	Type	Type			
400 3 AC	485	60	29	400 2 AC	10	6RA8025-6DS22-0AA0	3NE1817-0	-	5SD420			
		90	44		10	6RA8028-6DS22-0AA0	3NE1820-0	-	5SD420			
		125	61		10	6RA8031-6DS22-0AA0	3NE1021-0	-	5SD420			
		210	102		15	6RA8075-6DS22-0AA0	3NE3227	-	5SD440			
		280	136		15	6RA8078-6DS22-0AA0	3NE3231	-	5SD440			
		400	194		25	6RA8081-6DS22-0AA0	3NE3233	-	5SD440			
		600	291		25	6RA8085-6DS22-0AA0	3NE3336	-	5SD440			
		850	412		30	6RA8087-6DS22-0AA0	3NE3338-8	-	5SD480			
		1200	582		480 2 AC	40	6RA8091-6DS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾		
		1600	776			40	6RA8093-4DS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾		
		2000	970			40	6RA8095-4DS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾		
		3000	1455			40	6RA8098-4DS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾		
		480 3 AC	575		60	35	480 2 AC	10	6RA8025-6FS22-0AA0	3NE1817-0	-	5SD420
90	52			10	6RA8028-6FS22-0AA0	3NE1820-0		-	5SD420			
125	72			10	6RA8031-6FS22-0AA0	3NE1021-0		-	5SD420			
210	121			15	6RA8075-6FS22-0AA0	3NE3227		-	5SD440			
280	161			15	6RA8078-6FS22-0AA0	3NE3231		-	5SD440			
450	259			25	6RA8082-6FS22-0AA0	3NE3233		-	5SD440			
600	345			25	6RA8085-6FS22-0AA0	3NE3336		-	5SD440			
850	489			30	6RA8087-6FS22-0AA0	3NE3338-8		-	5SD480			
1200	690			40	6RA8091-6FS22-0AA0	- ²⁾		-	3NE1802-0 ³⁾			
575 3 AC	690			60	41	480 2 AC		10	6RA8025-6GS22-0AA0	3NE1817-0	-	5SD420
				125	86			10	6RA8031-6GS22-0AA0	3NE1021-0	-	5SD420
				210	145			15	6RA8075-6GS22-0AA0	3NE3227	-	5SD440
				400	276			25	6RA8081-6GS22-0AA0	3NE3233	-	5SD440
		600	414	25	6RA8085-6GS22-0AA0		3NE3336	-	5SD440			
		800	552	30	6RA8087-6GS22-0AA0		3NE3338-8	-	5SD480			
		1100	759	40	6RA8090-6GS22-0AA0		- ²⁾	-	3NE1802-0 ³⁾			
		1600	1104	40	6RA8093-4GS22-0AA0		- ²⁾	-	3NE1802-0 ³⁾			
		2000	1380	40	6RA8095-4GS22-0AA0		- ²⁾	-	3NE1802-0 ³⁾			
		2200	1518	40	6RA8096-4GS22-0AA0		- ²⁾	-	3NE1802-0 ³⁾			
		2800	1932	40	6RA8097-4GS22-0AA0		- ²⁾	-	3NE1802-0 ³⁾			
		690 3 AC	830	720	598		480 2 AC	30	6RA8086-6KS22-0AA0	3NE3337-8	-	5SD480
				1000	830			40	6RA8090-6KS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾
1500	1245			40	6RA8093-4KS22-0AA0	- ²⁾		-	3NE1802-0 ³⁾			
2000	1660			40	6RA8095-4KS22-0AA0	- ²⁾		-	3NE1802-0 ³⁾			
2600	2158			40	6RA8097-4KS22-0AA0	- ²⁾		-	3NE1802-0 ³⁾			
830 3 AC	1000	950	950	480 2 AC	40	6RA8088-6LS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾			
		1500	1500		40	6RA8093-4LS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾			
		1900	1900		40	6RA8095-4LS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾			
950 3 AC	1140	2200	2508	480 2 AC	40	6RA8096-4MS22-0AA0	- ²⁾	-	3NE1802-0 ³⁾			

¹⁾ 50/60 Hz

²⁾ Arm fuses included in the unit, external semiconductor fuses not required

³⁾ UL-recognized

Selection and ordering data (continued)

DC Converters for four-quadrant operation

Rated data				DC Converter			Fuses					
Armature circuit				Field circuit		Article No.	Armature circuit		Field circuit			
Rated supply voltage ¹⁾	Rated DC voltage	Rated DC current	Rated power	Rated supply voltage ¹⁾	Rated DC current		Phase	DC current	2 each			
V	V	A	kW	V	A		Type	Type	Type			
400 3 AC	420	15	6.3	400 2 AC	3	6RA8013-6DV62-0AA0	3NE1814-0	3NE1814-0	5SD420			
			12.6		5	6RA8018-6DV62-0AA0	3NE8003-1	3NE4102	5SD420			
			25		10	6RA8025-6DV62-0AA0	3NE1817-0	3NE4120	5SD420			
		90	38	10	6RA8028-6DV62-0AA0	3NE1820-0	3NE4122	5SD420				
			53		6RA8031-6DV62-0AA0	3NE1021-0	3NE4124	5SD420				
		210	88	15	6RA8075-6DV62-0AA0	3NE3227	3NE3227	5SD440				
			118		6RA8078-6DV62-0AA0	3NE3231	3NE3231	5SD440				
		400	168	25	6RA8081-6DV62-0AA0	3NE3233	3NE3233	5SD440				
			252		6RA8085-6DV62-0AA0	3NE3336	3NE3336	5SD440				
		850	357	30	6RA8087-6DV62-0AA0	3NE3338-8	3NE3334-0B ³⁾	5SD480				
		1200	504	480 2 AC	40	6RA8091-6DV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
		1600	672		40	6RA8093-4DV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
		2000	840		40	6RA8095-4DV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
3000	1260	40	6RA8098-4DV62-0AA0		- ²⁾	- ²⁾	3NE1802-0 ⁴⁾					
480 3 AC	500	15	6	480 2 AC	3	6RA8013-6FV62-0AA0	3NE1814-0	3NE1814-0	5SD420			
			15		5	6RA8018-6FV62-0AA0	3NE1815-0	3NE4102	5SD420			
			30		10	6RA8025-6FV62-0AA0	3NE1817-0	3NE4120	5SD420			
		90	45	10	6RA8028-6FV62-0AA0	3NE1820-0	3NE4122	5SD420				
			63		6RA8031-6FV62-0AA0	3NE1021-0	3NE4124	5SD420				
		210	105	15	6RA8075-6FV62-0AA0	3NE3227	3NE3227	5SD440				
			140		6RA8078-6FV62-0AA0	3NE3231	3NE3231	5SD440				
		450	225	25	6RA8082-6FV62-0AA0	3NE3233	3NE3334-0B	5SD440				
			300		6RA8085-6FV62-0AA0	3NE3336	3NE3336	5SD440				
		850	425	30	6RA8087-6FV62-0AA0	3NE3338-8	3NE3334-0B ³⁾	5SD480				
		1200	600	480 2 AC	40	6RA8091-6FV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
		575 3 AC	600		60	36	480 2 AC	10	6RA8025-6GV62-0AA0	3NE1817-0	3NE4120	5SD420
						75		10	6RA8031-6GV62-0AA0	3NE1021-0	3NE4124	5SD420
126	15					6RA8075-6GV62-0AA0		3NE3227	3NE3227	5SD440		
400	240			25	6RA8081-6GV62-0AA0	3NE3233	3NE3233	5SD440				
	360				6RA8085-6GV62-0AA0	3NE3336	3NE3336	5SD440				
850	510			30	6RA8087-6GV62-0AA0	3NE3338-8	3NE3334-0B ³⁾	5SD480				
1100	660			480 2 AC	40	6RA8090-6GV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
1600	960				40	6RA8093-4GV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
2000	1200				40	6RA8095-4GV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
2200	1320				40	6RA8096-4GV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
2800	1680			40	6RA8097-4GV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾				
	690 3 AC			725	760	551	480 2 AC	30	6RA8086-6KV62-0AA0	3NE3337-8	3NE3334-0B ³⁾	5SD420
40								6RA8090-6KV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾	
40		6RA8093-4KV62-0AA0	- ²⁾					- ²⁾	3NE1802-0 ⁴⁾			
40		6RA8095-4KV62-0AA0	- ²⁾					- ²⁾	3NE1802-0 ⁴⁾			
40		6RA8097-4KV62-0AA0	- ²⁾					- ²⁾	3NE1802-0 ⁴⁾			
830 3 AC	875	950	831	480 2 AC	40	6RA8088-6LV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
					40	6RA8093-4LV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
					40	6RA8095-4LV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			
1900	1663	40	6RA8096-4LV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾						
950 3 AC	1000	2200	2200	480 2 AC	40	6RA8096-4MV62-0AA0	- ²⁾	- ²⁾	3NE1802-0 ⁴⁾			

¹⁾ 50/60 Hz

²⁾ Arm fuses included in the unit, external semiconductor fuses not required

³⁾ Two fuses connected in parallel

⁴⁾ UL-recognized

SINAMICS DCM

DC Converter and Control Module

DC Converter

Options

Note:

When ordering a unit with options, add the suffix "-Z" to the Article No. of the unit and then state the order code(s) for the desired option(s) after the suffix.

Example:

6RA8075-6GV62-0AA0-Z
G00+G20+L85+...

See also ordering examples.

Available options

The following table provides an overview of the available options. Detailed descriptions of the options are provided in the section "Description of options".

Designation	Order code	Notes	Article No. for separate order	
			not coated	coated
CUD				
Standard CUD left	(Standard)	–	6RY1803-0AA00-0AA1	6RY1803-0AA20-0AA1
Advanced CUD left	G00	–	6RY1803-0AA05-0AA1	6RY1803-0AA25-0AA1
Standard CUD right	G10	This option requires an Advanced CUD left – order code G00	6RY1803-0AA00-0AA1 + 6RY1803-0GA00²⁾	6RY1803-0AA20-0AA1 + 6RY1803-0GA20²⁾
Advanced CUD right	G11	This option requires an Advanced CUD left – order code G00	6RY1803-0AA05-0AA1 + 6RY1803-0GA00²⁾	6RY1803-0AA25-0AA1 + 6RY1803-0GA20²⁾
Communication Board CBE20 left	G20	This option requires an Advanced CUD left – order code G00	–	6SL3055-0AA00-2EB0
Communication Board CBE20 right	G21	This option requires an Advanced CUD right – order code G11	–	6SL3055-0AA00-2EB0
Memory card left	S01	–	6RX1800-0AS01	–
Memory card right	S02	This option requires a Standard CUD right – order code G10 – or an Advanced CUD right – order code G11	6RX1800-0AS01	–
Field				
Field power section 1Q	(Standard)	–	– ¹⁾	– ¹⁾
Field power section 2Q	L11	Only applicable for units from 60 to 3000 A	– ¹⁾	– ¹⁾
Without field power section	L10	Only applicable for units from 60 to 3000 A	–	–
85 A field power section	L85	Only applicable for units from 1500 to 3000 A	– ¹⁾	– ¹⁾
Fans				
Standard fan	(Standard)	Self-ventilated units do not have a fan	– ¹⁾	–
Unit without fan	L20	Only applicable for units from 1500 to 3000 A	–	–
Fan for single-phase connection	L21	Only applicable for units from 400 to 1200 A	– ¹⁾	–
Additional options				
Electronics power supply for connection to 24 V DC	L05	Standard for Control Module, input voltage range 18 to 30 V, current consumption 5 A at 24 V	– ¹⁾	– ¹⁾
Armature circuit supply with extra-low voltage 10 to 50 V	L04	Only applicable for units up to ≤ 575 V rated supply voltage	– ¹⁾	– ¹⁾
Terminal Module Cabinet	G63	–	6RY1803-0AB05	–
Coated PCBs	M08	–	–	–
Nickel-plated copper busbars	M10	Only applicable for units from 60 to 3000 A	–	–
External sensor for ambient or inlet temperature	L15	–	– ¹⁾	–
Control for switching over the power section topology for parallel and series connections	S50	–	–	–
Extension of the liability for defects	Q80 ... Q85	See section "Description of options"	–	–

¹⁾ Available as spare part.

²⁾ The Standard CUD (uncoated 6RY1803-0AA00-0AA1; coated 6RY1803-0AA20-0AA1) and the Advanced CUD (uncoated 6RY1803-0AA05-0AA1; coated 6RY1803-0AA25-0AA1) can be inserted in either the left-hand or the right-hand slot and therefore have an article number which does not refer to a specific slot. A Connector Board (6RY1803-0GA00 or 6RY1803-0GA20) is also needed in order to retrofit a CUD.

Options (continued)

Option selection matrix

	G00	G10	G11	G20	G21	G63	L04	L05	L10	L11	L15	L20	L21	L85	M08	M10	S01	S02	S50
G00		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
G10	✓		–	✓	–	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
G11	✓	–		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
G20	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
G21	✓	–	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
G63	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
L04	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
L05	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
L10	✓	✓	✓	✓	✓	✓	✓	✓		–	✓	✓	✓	–	✓	✓	✓	✓	✓
L11	✓	✓	✓	✓	✓	✓	✓	✓	–		✓	✓	✓	✓	✓	✓	✓	✓	✓
L15	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓	✓	✓
L20	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		–	✓	✓	✓	✓	✓	✓
L21	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	–		✓	✓	✓	✓	✓	✓
L85	✓	✓	✓	✓	✓	✓	✓	✓	–	✓	✓	✓	✓		✓	✓	✓	✓	✓
M08	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓
M10	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓
S01	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓
S02	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓		✓
S50	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	

✓ Option can be combined without any restrictions

– Option cannot be combined

SINAMICS DCM

DC Converter and Control Module

DC Converter

Options (continued)

Ordering examples

Example 1

Application:

A DC drive system is required for a cableway. A SINAMICS DC MASTER is to handle the closed-loop control of the selected 560 kW DC motor with a rated armature voltage of 420 V and a rated armature current of 1306 A. Due to the overdimensioning of 25 % specified by the acceptance authorities, and due to the maximum ambient temperature of 45 °C that can occur, the rated current of the converter had to be further reduced by 5 %. This is the reason that a unit with a rated supply current of 2000 A was selected. The converter capable of energy recovery is to be connected to a 400 V line supply. A PROFINET connection is required for the higher-level control.

Solution:

The four-quadrant converter with 2000 A and 400 V AC must be selected for this application. The incremental encoder to sense the speed – mounted on the motor – is directly evaluated in the CUD of the SINAMICS DC MASTER, without requiring any additional option.

The following options must be selected in order to permit the PROFINET connection:

G00 (Advanced CUD left)

G20 (PROFINET Communication Board CBE20 left)

The ordering data are as follows:

6RA8095-4DV62-0AA0-Z

G00+G20

Example 2

Application:

An unwinder for paper in a reeler-slitter is to be modernized – but the existing motor is to be kept. The power section is to be supplied from the existing 690 V supply. The technological control is to be implemented in the higher-level PCS7 system. The client specified PROFIBUS as the control and setpoint interface. The following measured values and status displays are to be visualized in the cabinet doors of the drive cabinet to facilitate fast and simple diagnostics for the service and maintenance personnel: Armature current, armature voltage, speed, field current, status messages – operation and fault.

The customer explained that he repeatedly had problems with the existing converter relating to overvoltage in the motor armature circuit – and as a consequence, this resulted in tension fluctuations in the paper web when the motor went into the field-weakening range. As a result of instability in the control voltage supply, in the past, there were repeatedly failures that had a negative impact on the availability.

Solution:

As a result of the data of the existing motor and the customer specifications relating to acceleration and braking ramps, tambour roll weight and maximum diameter, a four-quadrant converter was selected with a rated supply voltage of 690 V and a rated current of 1500 A. The dynamic overload capability of the units is utilized to brake the drive when the paper web breaks.

The technological control with current setpoint interface is realized in the higher-level control. This is the reason that for this particular application, the Standard CUD is sufficient, which already has an integrated PROFIBUS interface.

The problem with armature overvoltages when entering the field weakening range has now been resolved by selecting the two-quadrant field power section option. By actively reducing the current using a counter-voltage, the field current actual value can now follow the field current setpoint – even for steep acceleration ramps – and therefore overvoltages are avoided in the armature circuit. The tension fluctuations in the paper web are consequently eliminated.

Selecting the option "electronics power supply for connection to 24 V DC" means that the drive system can be integrated into a favorably-priced and low-maintenance DC UPS system comprising SITOP components.

The requirements regarding actual value and status displays were addressed by installing the AOP30 Advanced Operator Panel in the doors of the drive cabinet.

Coated PCBs and nickel-plated copper busbars were selected as a result of the aggressive atmosphere with a high percentage of H₂S.

Since the availability of equipment is extremely important in the paper industry, the option "memory card left" should also be selected in order to reduce downtimes. The firmware and additional AOP text languages are stored on this card. Further, parameter values can be additionally saved there and there is a reserved memory range for offline long-time trace records.

The following options must be selected for this particular application:

L05 (electronics power supply for connection to 24 V DC)

L11 (2Q field power section)

M08 (coated PCBs)

M10 (nickel-plated copper busbars)

S01 (memory card left)

Further, the following accessories are required:
AOP30 Advanced Operator Panel (6SL3055-0AA00-4CA4)
RS485 cable, 3 m long

The ordering data are as follows:

6RA8093-4KV62-0AA0-Z

L05+L11+M08+M10+S01

and

6SL3055-0AA00-4CA4

as well as

6RY1807-0AP00

Options (continued)

Description of options

G00

Advanced CUD left



In addition to the connections and functions of the Standard CUD, the Advanced CUD has two DRIVE-CLiQ connections and one option slot. The use of an Advanced CUD also provides the opportunity of inserting an additional CUD (Standard or Advanced) to increase the computational performance and the number of terminals. This can be used, e.g. to implement additional technological functions.

By using an Advanced CUD, which is located in the left-hand slot instead of the Standard CUD, the SINAMICS components SMC30, TM15, TM31, TM150 and CBE20 can be connected to the SINAMICS DC MASTER, and the OALINK functionality can also be utilized. More detailed information about the SINAMICS components is available in the catalog section "Accessories and supplementary components".

G10

Standard CUD right



Selecting option **G10** provides the possibility of further increasing the performance of technology functions for the SINAMICS DC MASTER. As a result of the additional Standard CUD that is inserted in the right-hand slot of the electronics tray, users have additional computational performance at their fingertips in order to fulfill even the highest demands when it comes to closed-loop control performance. Option **G00** is required when selecting option G10. An extension to include two Control Units is only possible when the Advanced CUD is inserted in the left-hand slot.

G11

Advanced CUD right

With option **G11**, users can address the highest demands regarding the closed-loop control performance and use the wide range of interfaces. With this option, in addition to the Advanced CUD located in the left-hand slot, an additional Advanced CUD can be mounted in the right-hand slot. This therefore doubles the number of interfaces of the SINAMICS DC MASTER. Option **G00** is required when selecting option **G11**. An extension to include two Control Units is only possible when the Advanced CUD is inserted in the left-hand slot.

G20

Communication Board CBE20 left



The CBE20 Communication Board can be used to connect to a PROFINET IO network via the Advanced CUD.

The SINAMICS DC MASTER then assumes the function of a PROFINET IO device in the sense of PROFINET and offers the following functions:

- PROFINET IO device
- 100 Mbps/s full duplex
- Supports real-time classes of PROFINET IO:
- RT (Real-Time)
- Connection to control systems as PROFINET IO devices in accordance with PROFIdrive, Specification V4.
- In addition to PROFIBUS (standard), PROFINET can also be used for engineering with the STARTER commissioning tool.
- Integrated 4-port switch with four RJ45 sockets based on the PROFINET ASIC ERTEC400. The optimum topology (line, star, tree) can therefore be configured without additional external switches.

The following functions can also be used:

- EtherNet/IP
- SINAMICS Link (with memory card, option S01 or S02)

The CBE20 is inserted in the option slot of the Advanced CUD, which is inserted in the left-hand slot. An Advanced CUD must be located in the left-hand slot in order to be able to use option G20. This can be selected with option G00.

Technical specifications	
Permissible ambient temperature	
• Storage and transport	-40 ... +70 °C
• Operation	0 ... 55 °C
Approvals	cULus (File No.: E164110)
Accessories for CBE20	
Industrial Ethernet FC	Type
• RJ45 Plug 145 (1 plug)	6GK1901-1BB30-0AA0
• RJ45 Plug 145 (10 plugs)	6GK1901-1BB30-0AB0
• Stripping tool	6GK1901-1GA00
• Standard cable GP 2x2	6XV1840-2AH10
• Flexible cable GP 2x2	6XV1870-2B
• Trailing cable GP 2x2	6XV1870-2D
• Trailing cable 2x2	6XV1840-3AH10
• Marine cable 2x2	6XV1840-4AH10

The cables are sold by the meter.

For further information about connectors and cables, refer to Catalog IK PI.

SINAMICS DCM

DC Converter and Control Module

DC Converter

Options (continued)

G21

Communication Board CBE20 right

With option G21, an Advanced CUD can be inserted in the right-hand slot (refer to option G11), which is used to expand CBE20. More detailed information on the functionality, selection and ordering data of the CBE20 is provided under option G20.

G63

Terminal Module Cabinet (TMC)

The Terminal Module Cabinet (TMC) is equipped with spring terminals which provide a simple means of connecting CUD standard signals.

This is made possible by routing the appropriate interfaces (X177 of the CUD) to the TMC using an adapter board and a ribbon cable (X71, X72).

The TMC comprises two terminal blocks and a cable set.

Note: To equip two CUDs with one TMC each, option G63 must be ordered twice.

L04

Armature circuit supply with extra-low voltage 10 to 50 V

With option L04, the SINAMICS DC MASTER is re-equipped for operation with 10 to 50 V AC. This is frequently required especially for electrochemical applications, when controlling solenoids, when using the converter to supply the fields of special motors or Ward-Leonard converters (MG sets).

This option can only be selected for units with rated supply voltages of up to 575 V.

L05

Electronics power supply for connection to 24 V DC

With option L05, users have the possibility of equipping SINAMICS DC MASTER with an electronics power supply for connection to 24 V DC instead of the standard electronics power supply. This option allows users to connect the units to a favorably-priced 24 V UPS system.

This option cannot be selected for Control Modules as the Control Module is supplied as standard with an electronics power supply for connection to 24 V DC.

Input voltage range: 18 to 30 V,
current consumption: 5 A at 24 V

L10

Without field power section

In some applications it may be necessary to individually adapt the field power section. For this particular case, users can order option L10 where SINAMICS DC MASTER is not equipped with the standard integrated field power section. This then allows them to implement their own individual solutions for the field power section.

This option cannot be ordered for units with rated DC currents from 15 to 30 A.

L11

2Q field power section

For applications that demand highly dynamic field current changes, by specifying option L11, the SINAMICS DC MASTER can be equipped with a two-quadrant field with active current reduction. Further, this field power section has an integrated field overvoltage protection function.

This option cannot be ordered for units with rated DC currents from 15 to 30 A.

L15

External sensor for the ambient or inlet temperature

Option L15 is a sensor located outside the unit to measure the ambient or inlet temperature. For example, this can be used to simply monitor the cabinet temperature and/or identify when the air intake filter is blocked.

L20

Unit without fan

With option L20, units with a rated DC current of 1500 A or higher can be ordered without a fan.

Note: Measures must be taken to ensure a volumetric air flow rate which is at least equal to the cooling air requirement specified in the technical specifications.

L21

Fan for single-phase connection

A fan can be optionally supplied with a single-phase connection for units with rated DC currents between 400 and 1200 A. This allows fans to be more quickly replaced than three-phase fans – especially as the direction of rotation does not have to be checked.

Rated supply voltage: 230 V 1 AC \pm 10 %
(50 and 60 Hz)

Rated DC current	Line frequency	Rated fan current
400 ... 850 A	50 Hz	0.51 A
	60 Hz	0.72 A
950 ... 1200 A	50 Hz	0.81 A
	60 Hz	1.14 A

Units smaller than 400 A are self-ventilated or have an integrated 24 V DC fan. Units with ratings of greater than 1200 A require a three-phase connection for the fan due to the higher power consumption.

L85

85 A field power section

With option L85, users can have the SINAMICS DC MASTER equipped with a rated DC field current of 85 A.

This option can only be ordered for units with rated DC currents from 1500 to 3000 A.

M08

Coated PCBs

In order to improve the reliability for increased degrees of pollution and climatic stressing, it is possible to order PCBs of the SINAMICS DC MASTER that are coated on both sides by specifying option M08.

M10

Nickel-plated copper busbars

When ordered with option M10, the SINAMICS DC MASTER is equipped with nickel-plated copper busbars. The degree of availability can be increased for aggressive atmospheres.

This option is not available for units with rated DC currents from 15 to 30 A.

Options (continued)

S01

Memory card left

With option S01, users receive a memory card for one Standard CUD or one Advanced CUD, which is inserted in the left-hand slot.

This memory card offers the following options:

- Additional languages can be downloaded to the AOP30 Advanced Operator Panel. When using two CUDs, option S01 and option S02 must be ordered.
- Perform an offline long-time trace.
- Download the DCC block library into the drive.
- Update the firmware.

The SINAMICS Link function requires that the memory card is always inserted.

S02

Memory card right

With option S02, users receive a memory card for one Standard CUD or one Advanced CUD, which is inserted in the right-hand slot.

This memory card offers the following options:

- Additional languages can be downloaded to the AOP30 Advanced Operator Panel. When using two CUDs, option S01 and option S02 must be ordered.
- Perform an offline long-time trace.
- Download the DCC block library into the drive.
- Update the firmware.

The SINAMICS Link function requires that the memory card is always inserted.

In order to be able to use option S02, a Standard CUD right (option G10) or an Advanced CUD right (option G11) is required.

S50

Switchover of the power section topology

In certain applications, it is necessary to switch between 12-pulse parallel connection and 12-pulse series connection during operation by means of control command.

External contactors must be used to switch over the power section topology. Option S50 provides the required firmware functionality.

Requirements for using this functionality:

- All units involved must be equipped with option S50.
- No redundant operation mode ("n+m" mode) may be used.
- The function of the "parallel switching master" must remain on the same unit in both power section topologies.

Q80 to Q85

Extension of the liability for defects

We can offer you the possibility of extending the liability for defects periods beyond the standard liability for defects period. The standard liability for defects period, as listed in our standard conditions for the supply of services and products, is 12 months.

The following extension periods are available:

Extension of the liability for defects period for converters

Additional identification code -Z with order code	Additional text
Q80	Extension of the liability for defects period by 12 months to a total of 24 months (two years) from delivery
Q81	Extension of the liability for defects period by 18 months to a total of 30 months (2½ years) from delivery
Q82	Extension of the liability for defects period by 24 months to a total of 36 months (three years) from delivery
Q83	Extension of the liability for defects period by 30 months to a total of 42 months (3½ years) from delivery
Q84	Extension of the liability for defects period by 36 months to a total of 48 months (four years) from delivery
Q85	Extension of the liability for defects period by 48 months to a total of 60 months (five years) from delivery

The currently valid conditions for extending the period of liability for defects can be found at:

<http://support.automation.siemens.com/WW/view/en/56715113>

SINAMICS DCM


DC Converter and Control Module

DC Converter

Circuit diagrams

Control Units


3

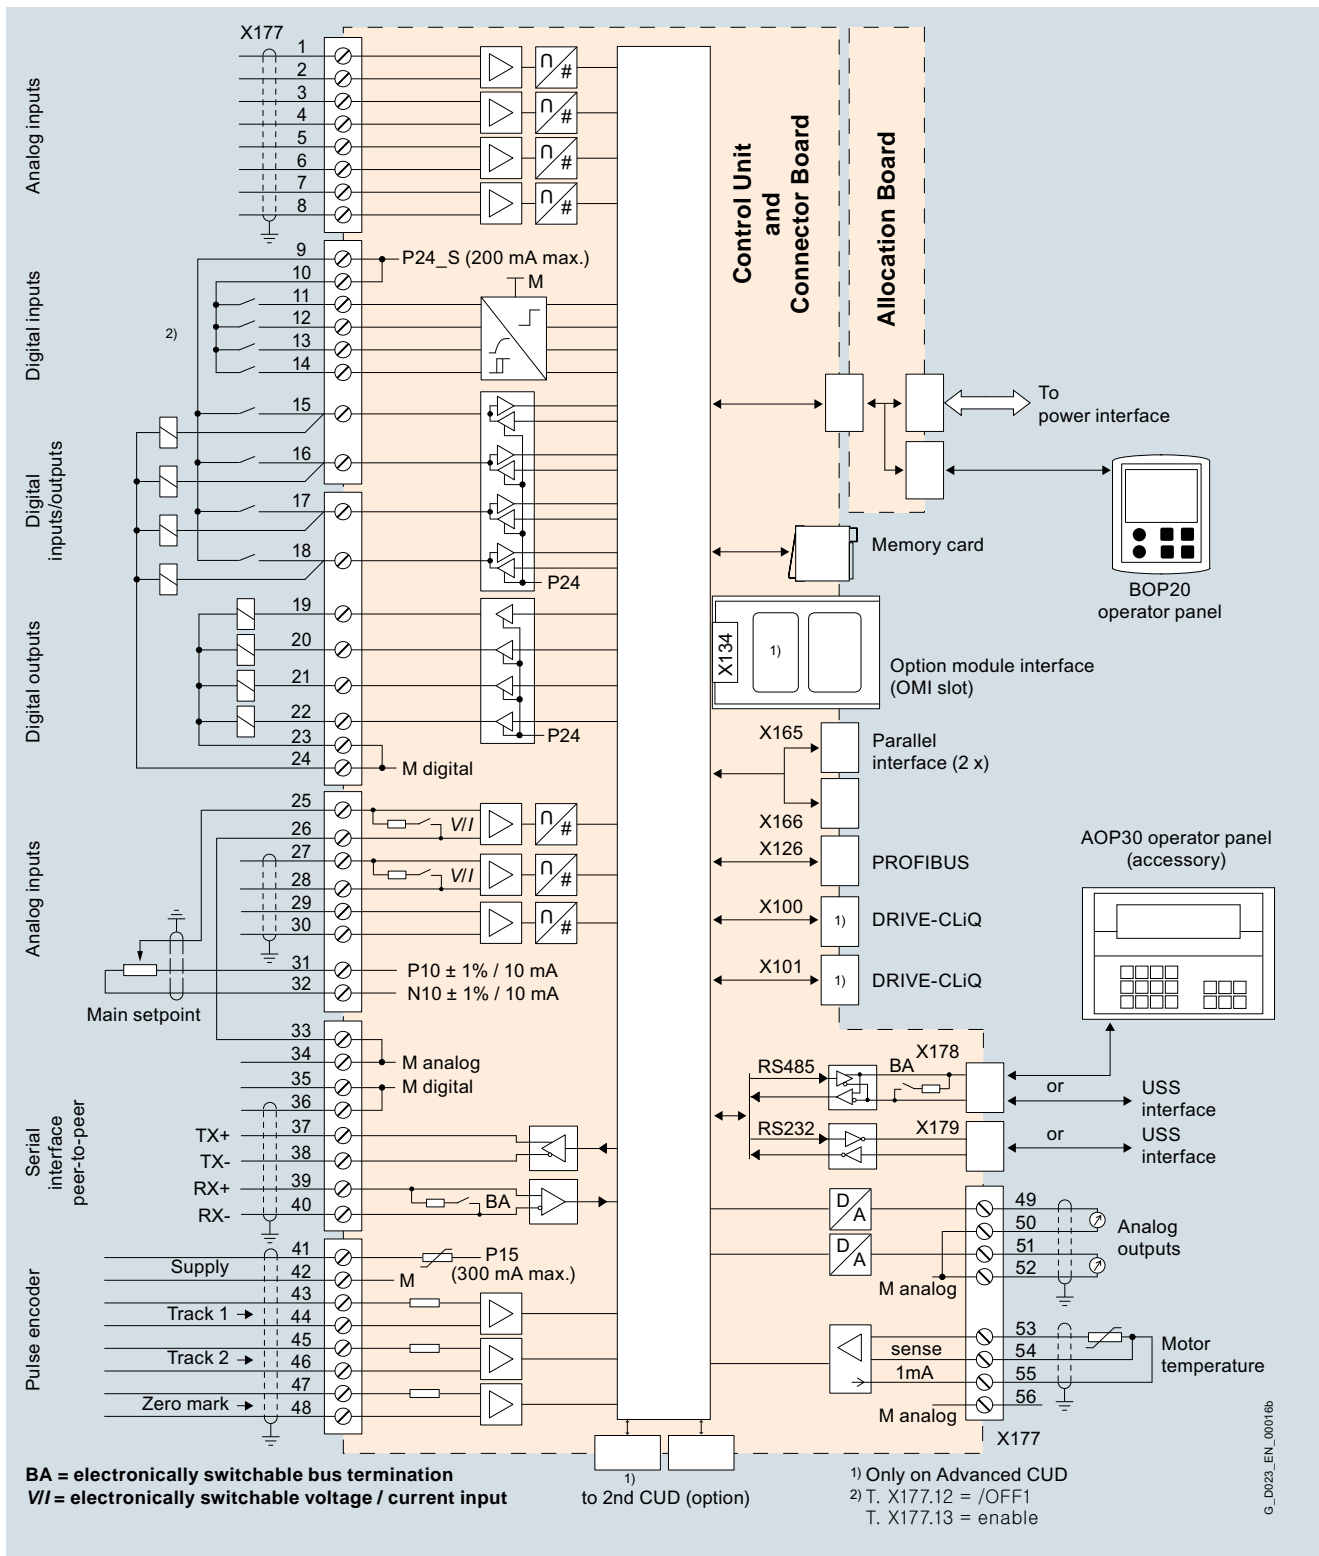

Connection diagram, Standard CUD/Advanced CUD with typical connections

Circuit diagrams (continued)

DC Converters

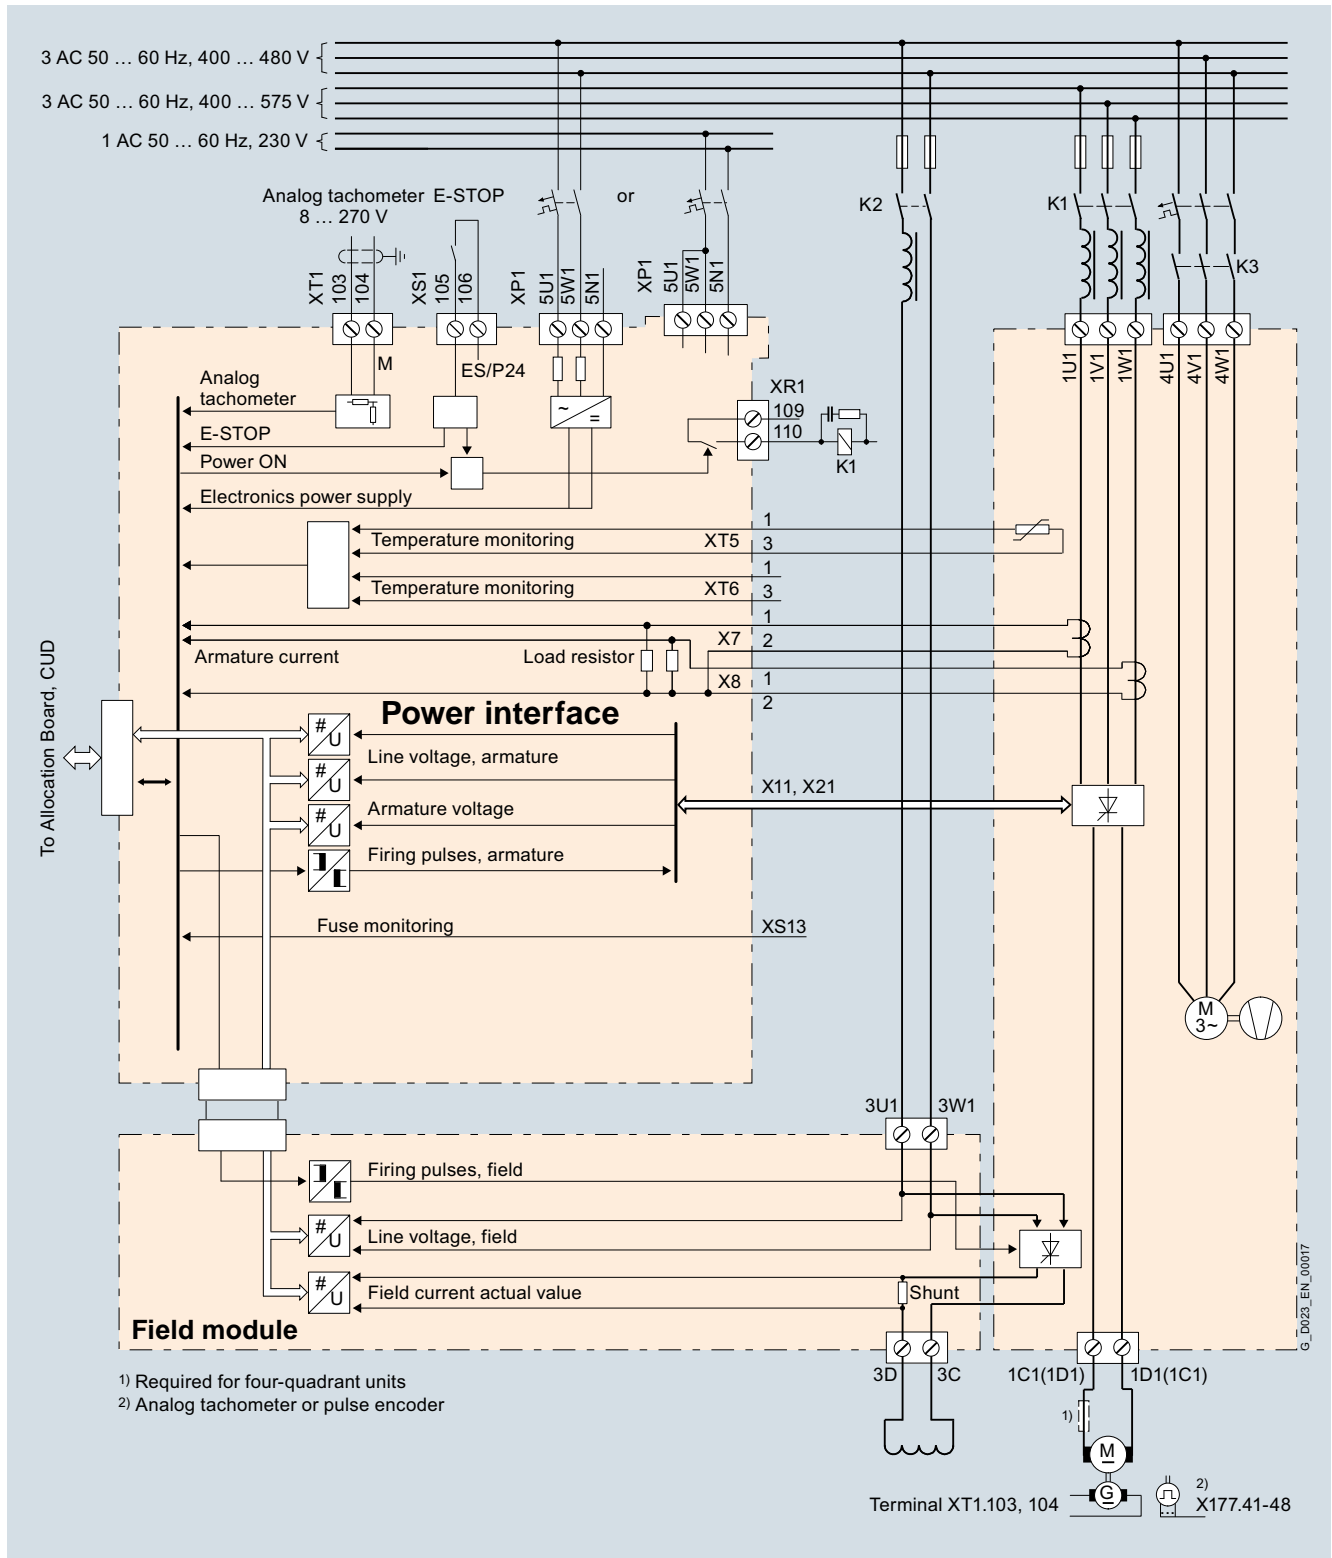

Connection diagram, DC Converters, 400 to 3000 A, electronics power supply 400 V or 230 V, with fan (standard version)

SINAMICS DCM

DC Converter and Control Module

DC Converter

Circuit diagrams (continued)

Assignment of terminals and connectors

Overview

Overview of terminals and connectors

1U1, 1V1, 1W1, 1C1, 1D1	Power section
3U1, 3W1, 3C, 3D	Field circuit
4U1, 4V1, 4W1, 4N1	Fan
5U1, 5W1, 5N1	Electronics power supply
X100, X101	DRIVE-CLiQ
X126	PROFIBUS
X165, X166	Parallel connection interface
X177	Analog inputs, digital inputs, digital outputs, setpoints, reference voltage (P10/N10), serial interface (peer-to-peer), pulse encoder, analog outputs, temperature sensor
X178	RS485 interface for connecting the AOP30, USS interface as alternative; as a general rule, only one of the two interfaces X178 or X179 can be used
X179	RS232 interface for use as a USS interface; as a general rule, only one of the two interfaces X178 or X179 can be used
XR1, XS1, XT1	Relay output for line contactor, safety shutdown (E-STOP), analog tachometer

Power section

Terminal type, power connections for 15 A and 30 A units

Type	KDS 10 PC board terminal
Conductor size	<ul style="list-style-type: none"> Rigid: 0.5 ... 16 mm² Flexible with end sleeve with/without plastic sleeve: 0.5 ... 10 mm² Conductor sizes: AWG 20 ... 6
Stripped length	12 mm
Tightening torque	1.2 ... 1.5 Nm

Terminal type, power connections for units of 60 A and higher

Units	Data
60 ... 210 A	1U1, 1V1, 1W1: 3 × 20 mm aluminum busbar, through hole for M8 1C1, 1D1: 5 × 20 mm aluminum busbar, through hole for M8 Max. conductor cross-section for cables with cable lug in acc. with DIN 46234: 1U1, 1V1, 1W1, 1C1, 1D1: 2 × 95 mm ² Tightening torque for 1U1, 1V1, 1W1, 1C1, 1D1: 13 Nm Tightening torque for protective conductor: 25 Nm
280 A	1U1, 1V1, 1W1: 3 × 20 mm copper busbar, through hole for M8 1C1, 1D1: 5 × 20 mm copper busbar, through hole for M8 Max. conductor cross-section for cables with cable lug in acc. with DIN 46234: 1U1, 1V1, 1W1, 1C1, 1D1: 2 × 95 mm ² Tightening torque for 1U1, 1V1, 1W1, 1C1, 1D1: 13 Nm Tightening torque for protective conductor: 25 Nm
400 ... 450 A	1U1, 1V1, 1W1: 5 × 30 mm aluminum busbar, through hole for M10 1C1, 1D1: 5 × 35 mm aluminum busbar, through hole for M10 Max. conductor cross-section for cables with cable lug in acc. with DIN 46234: 1U1, 1V1, 1W1: 2 × 150 mm ² 1C1, 1D1: 2 × 185 mm ² Tightening torque for 1U1, 1V1, 1W1, 1C1, 1D1: 25 Nm Tightening torque for protective conductor: 50 Nm
600 A	1U1, 1V1, 1W1: 5 × 30 mm copper busbar, through hole for M10 1C1, 1D1: 5 × 35 mm copper busbar, through hole for M10 Max. conductor cross-section for cables with cable lug in acc. with DIN 46234: 1U1, 1V1, 1W1: 2 × 150 mm ² 1C1, 1D1: 2 × 185 mm ² Tightening torque for 1U1, 1V1, 1W1, 1C1, 1D1: 25 Nm Tightening torque for protective conductor: 50 Nm
720 ... 850 A	1U1, 1V1, 1W1, 1C1, 1D1: 5 × 60 mm copper busbar, through hole for M12 Max. conductor cross-section for cables with cable lug in acc. with DIN 46234: 1U1, 1V1, 1W1, 1C1, 1D1: 4 × 150 mm ² Tightening torque for 1U1, 1V1, 1W1, 1C1, 1D1: 44 Nm Tightening torque for protective conductor: 50 Nm

Protective conductor:

Minimum cross-section 10 mm², for connection options, see dimensional drawings.

Circuit diagrams (continued)


Terminal type, power connections for units of 60 A and higher (continued)

Units	Data
900 ... 1200 A	1U1, 1V1, 1W1, 1C1, 1D1: 6 × 80 mm copper busbar, insert nut M12
	Max. conductor cross-section for cables with cable lug in acc. with DIN 46234: 1U1, 1V1, 1W1, 1C1, 1D1: 4 × 150 mm ²
	Tightening torque for 1U1, 1V1, 1W1, 1C1, 1D1: 44 Nm Tightening torque for protective conductor: 60 Nm
1500 ... 2000 A	1U1, 1V1, 1W1: 10 × 120 mm aluminum busbar, through hole for M12 1C1, 1D1: Aluminum busbar, cross-section 60 × 10 mm / 323 mm wide, insert nut M12
	Max. conductor cross-section for cables with cable lug in acc. with DIN 46234: 1U1, 1V1, 1W1: 4 × 240 mm ² 1C1, 1D1: 8 × 240 mm ²
	Tightening torque for 1U1, 1V1, 1W1, 1C1, 1D1: 44 Nm Tightening torque for protective conductor: 60 Nm
2200 ... 3000 A	1U1, 1V1, 1W1: 10 × 120 mm copper busbar, through hole for M12 1C1, 1D1: Copper busbar 60 × 10 mm / 323 mm wide, insert nut M12
	Max. conductor cross-section for cables with cable lug in acc. with DIN 46234: 1U1, 1V1, 1W1: 6 × 240 mm ² 1C1, 1D1: 8 × 240 mm ²
	Tightening torque for 1U1, 1V1, 1W1, 1C1, 1D1: 44 Nm Tightening torque for protective conductor: 60 Nm

The units are designed for a permanent line supply connection in accordance with DIN VDE 0160-106, Section 6.5.2.1.

The conductor cross-sections (also for the protective conductor) must be determined in accordance with the regulations that apply in each case – e.g. DIN VDE 0276-1000.

Assignment of power connections

Terminal	Function	Technical data
1U1 1V1 1W1	Power section line connection armature circuit	See under "Technical specifications" (Rated armature supply voltage)
	Protective conductor PE	
1C1 (1D1) 1D1 (1C1)	Motor connection, armature circuit	See under "Technical specifications" (Rated DC voltage)

Field circuit

Terminal type, field circuit connections

Units with rated armature DC current 15 ... 850 A:	
Type	ZFKDS 4-10 PC board terminal
Conductor size	<ul style="list-style-type: none"> • Rigid: 0.2 ... 6 mm² • Flexible: 0.2 ... 4 mm² • Conductor sizes: AWG 24 ... 10 • Flexible with end sleeve with/without plastic sleeve: 0.25 ... 4 mm²
Stripped length	10 mm
Units with rated armature DC current 900 ... 1200 A:	
Type	20E/4DS terminal strip
Conductor size	<ul style="list-style-type: none"> • Rigid: 6 ... 16 mm² • Flexible: 6 ... 10 mm²
Stripped length	8 mm
Units with rated armature DC current 1500 ... 3000 A:	
Type	UK16N terminal block
Conductor size	<ul style="list-style-type: none"> • Rigid: 2.5 ... 25 mm², AWG 14 ... 4 • Flexible: 4 ... 16 mm², AWG 12 ... 6
Stripped length	11 mm
Tightening torque	1.5 ... 1.8 Nm

SINAMICS DCM

DC Converter and Control Module

DC Converter

Circuit diagrams (continued)

Terminal type, field circuit connections (continued)

Units with option L85 (with rated field DC current 85 A):

Type	UK35 terminal block
Conductor size	<ul style="list-style-type: none"> • Rigid: 0.75 ... 50 mm² • Flexible: 0.75 ... 35 mm² • Conductor sizes: AWG 18 ... 0/1 • Flexible with end sleeve with/without plastic sleeve: 0.75 ... 35 mm²
Stripped length	16 mm
Tightening torque	3.2 ... 3.7 Nm

Assignment of connections for the field circuit



Terminal	Function	Technical data
XF1: 3U1, 3W1	Power section line connection field circuit	See under "Technical specifications" (Rated field supply voltage)
XF2-1: 3D XF2-2: 3C	Motor connection, field circuit	See under "Technical specifications" (Rated field DC voltage)

Electronics power supply

Terminal type, electronics power supply

Type	MSTB 2.5 / CIF plug-in terminal
Conductor size	<ul style="list-style-type: none"> • Rigid: 0.2 ... 2.5 mm² • Flexible: 0.2 ... 2.5 mm² • Conductor sizes: AWG 24 ... 12 • Flexible with end sleeve with/without plastic sleeve: 0.25 ... 2.5 mm²
	Multi-conductor connection (2 conductors of the same type and with same cross-section):
	<ul style="list-style-type: none"> • Rigid: 0.2 ... 1 mm² • Flexible: 0.2 ... 1.5 mm² • Flexible with end sleeve without plastic sleeve: 0.25 ... 1 mm² • Flexible with end sleeve with plastic sleeve: 0.5 ... 1.5 mm²
Stripped length	7 mm
Tightening torque	0.5 ... 0.6 Nm

Assignment of terminals for the electronics power supply

Terminal	Connection	Function	Technical data
XP1			
5U1 5W1 5N1		400 V supply	380 V (-25 %) ... 480 V (+10 %) 2 AC; $I_n = 1$ A (-35 % for 1 min) Internal fuse with F200, F201 on Power Interface DC Converter External protection max. 6 A, characteristic C recommended
or			
5U1 5W1 5N1		230 V supply	190 V (-25 %) ... 240 V (+10 %) 1 AC; $I_n = 2$ A (-35 % for 1 min) Internal fuse with F200, F201 on Power Interface DC Converter External protection max. 6 A, characteristic C recommended

Power Interface DC Converter

Note:

In the case of line supply voltages that fall outside the tolerance range, the supply voltages for the electronics, field circuit, and unit fan must be adapted to the permissible value using transformers. An isolation transformer is absolutely essential for rated line supply voltages above 480 V.

The rated supply voltage for the armature circuit (index i00) and for the field circuit (index i01) must be set at p50078.

Circuit diagrams (continued)


Fans

Terminal type, fan connections for units with forced ventilation ≥ 400 A

Type	DFK-PC4 plug-in terminal
Conductor size	<ul style="list-style-type: none"> • Rigid: 0.2 ... 4 mm² • Flexible: 0.2 ... 4 mm² • Conductor sizes: AWG 24 ... 10

The connecting leads must be insulated up to the point where they meet the terminal enclosure.

Assignment of terminals for fan connection

Terminal	Function	Technical data
4U1 4V1 4W1	400 ... 460 V supply	400 ... 460 V 3 AC For additional data, see "Technical specifications"
	Protective conductor PE	
or		
4U1 4N1	230 V supply	230 V 1 AC For additional data, see "Technical specifications"

Open-loop and closed-loop control section

Terminal type, open-loop and closed-loop control section

X177:	
Type	SPT 1.5 spring-loaded terminal
Conductor size	<ul style="list-style-type: none"> • Rigid: 0.2 ... 1.5 mm² • Flexible: 0.2 ... 1.5 mm² • Conductor sizes: AWG 24 ... 16 • Flexible with end sleeve without plastic sleeve: 0.25 ... 1.5 mm² (stripped length, 8 mm) • Flexible with end sleeve with plastic sleeve: 0.25 ... 0.75 mm² (stripped length, 8 mm)
Stripped length	10 mm
X178, X179:	
Type	FMC 1.5 plug-in terminal
Conductor size	<ul style="list-style-type: none"> • Rigid: 0.2 ... 1.5 mm² • Flexible: 0.2 ... 1.5 mm² • Conductor sizes: AWG 24 ... 16 • Flexible with end sleeve without plastic sleeve: 0.25 ... 1.5 mm² • Flexible with end sleeve with plastic sleeve: 0.25 ... 0.75 mm²
Stripped length	10 mm
XR1, XS1, XT1:	
Type	MSTB 2.5 / CIF plug-in terminal
Conductor size	<ul style="list-style-type: none"> • Rigid: 0.2 ... 2.5 mm² • Flexible: 0.2 ... 2.5 mm² • Conductor sizes: AWG 24 ... 12 • Flexible with end sleeve with/without plastic sleeve: 0.25 ... 2.5 mm²
Stripped length	7 mm
Tightening torque	0.5 ... 0.6 Nm
X126:	
Type	Submin D, 9-pin
X100, X101:	
Type	Western socket 8 / 4 (RJ45)

SINAMICS DCM

DC Converter and Control Module

DC Converter

Circuit diagrams (continued)

Terminals on Connector Board

Assignment, terminal X177

Terminal X177	Function	Technical data
Analog inputs (user-assignable inputs)		
1 2	AI3 + AI3 -	Analog input 3
3 4	AI4 + AI4 -	Analog input 4
5 6	AI5 + AI5 -	Analog input 5
7 8	AI6 + AI6 -	Analog input 6
Digital inputs (user-assignable inputs)		
9 10	24 V DC	24 V supply (output)
11	DI0	Digital input 0
12	DI1	Digital input 1
13	DI2	Digital input 2
14	DI3	Digital input 3
Digital inputs/outputs (user-assignable inputs/outputs)		
15	DI/ DO4	Digital input/ output 4
16	DI/ DO5	Digital input/ output 5
17	DI/ DO6	Digital input/ output 6
18	DI/ DO7	Digital input/ output 7
19	DO0	Digital output 0
20	DO1	Digital output 1
21	DO2	Digital output 2
22	DO3	Digital output 3
23, 24	M	Ground, digital
Analog inputs, setpoint inputs (user-assignable inputs)		
25 26	AI0 + AI0 -	Analog input 0 Main setpoint
27 28	AI1 + AI1 -	Analog input 1
29 30	AI2 + AI2 -	Analog input 2
Reference voltage		
31 32	P10 N10	Reference voltage ± 10 V (output)
33, 34	M	Ground, analog
Serial interface, peer-to-peer RS485		
35, 36	M	Ground, digital
37	TX+	Send cable +
38	TX-	Send cable -
39	RX+	Receive cable +
40	RX-	Receive cable -

Circuit diagrams (continued)

Assignment, terminal X177 (continued)

Terminal X177	Function	Technical data
Pulse encoder input		
41	Pulse encoder supply	+13.7 ... +15.2 V, 300 mA short-circuit proof (electronically protected) For overload: Alarm A60018
42	Pulse encoder ground	
43	Track 1 positive connection	Load: ≤ 5.25 mA at 15 V (without switching losses) Pulse duty factor: 1:1
44	Track 1 negative connection	
45	Track 2 positive connection	See below for data relating to cables, cable length, shield connection, input pulse levels, hysteresis, track displacement, and pulse frequency.
46	Track 2 negative connection	
47	Zero mark positive connection	
48	Zero mark negative connection	
Analog outputs (user-assignable outputs)		
49	A00 Analog output 0	± 10 V, max. 2 mA short-circuit proof, resolution ± 15 bits
50	M Ground, analog	
51	A01 Analog output 1	
52	M Ground, analog	
Connections for temperature sensor (motor interface 1)		
53	Temp 1	Sensor acc. to p50490
54	Temp 2 (sense cable)	The cable to the temperature sensor on the motor must be shielded and connected to ground at both ends.
55	Temp 3	The cables for the Temp 1 and Temp 3 connections to the temperature sensor must have approximately the same length. The sense cable (Temp 2) is used for compensating the cable resistances. If you are not using a sense cable, terminals 54 and 55 must be connected.
56	M Ground, analog	

Connector Board

SINAMICS DCM

DC Converter and Control Module

DC Converter

More information

Free function blocks

Application, properties

Logic operations which link several states (e.g. access control, plant status) to a control signal (e.g. ON command) are required for controlling the drive system in a wide variety of applications. Along with logic operations, a number of arithmetic operations and storing elements are becoming increasingly important in drive systems.

This functionality is available as function module "Free function blocks" (FBLOCKS) for SINAMICS DC MASTER and can be activated in the Control Unit (CUD). A detailed description is provided in the Function Manual "Free Function Blocks" (see catalog section "Services and documentation").

Configuring and use

The free function blocks are configured at the parameter level.

The following parameters are required for this:

- Input parameters (e.g. inputs I0 ... I3 for the AND function block)
- Output parameters (e.g. output Y for the numeric change-over switch)
- Adjustable parameters (e.g. pulse duration for pulse generator MFP)
- Runtime group (this includes the sampling time; the free function blocks are not computed in the factory setting)
- Run sequence within the runtime group

A parameter is assigned to each input, output, and setting variable. These can be accessed by means of the AOP30 Advanced Operator Panel or STARTER commissioning software. The free function blocks can be interconnected at the BICO level. The free function blocks do not support data set dependency.

Range of blocks

The table below shows the range of free function blocks available. The special technical properties of the individual function blocks can be taken from the function block diagrams in Chapter 3 of the Function Manual.

Short name	Name of function block	Data type	Count per drive object
AND	AND function block	BOOL	4
OR	OR function block	BOOL	4
XOR	XOR function block	BOOL	4
NOT	Inverter	BOOL	4
ADD	Adder	REAL	2
SUB	Subtractor	REAL	2
MUL	Multiplier	REAL	2
DIV	Divider	REAL	2
AVA	Absolute value generator with sign evaluation	REAL	2
MFP	Pulse generator	BOOL	2
PCL	Pulse shortener	BOOL	2
PDE	ON delay	BOOL	2
PDF	OFF delay	BOOL	2
PST	Pulse stretcher	BOOL	2
RSR	RS flip-flop, reset dominant	BOOL	2
DFR	D flip-flop, reset dominant	BOOL	2
BSW	Binary change-over switch	BOOL	2
NSW	Numeric change-over switch	REAL	2
LIM	Limiter	REAL	2
PT1	Smoothing element	REAL	2
INT	Integrator	REAL	1
DIF	Derivative-action element	REAL	1
LVM	Double-sided limit monitor with hysteresis	BOOL	2

More information (continued)

Drive Control Chart (DCC)

The "Drive Control Chart" function (DCC) is available for more complex applications.

DCC allows you to graphically configure the required functionality and then download it to the drive. It provides a significantly extended range of block types available.

In online operation, the signal values can be monitored in STARTER/SCOUT in the DCC chart.

Power section and cooling

SINAMICS DC MASTER converters distinguish themselves as a result of the compact, space-saving design. The electronics module (available in various customer-specific combinations with options) is installed in a cradle that can be swiveled out. The easy access to individual components makes this technology very service-friendly.

Plug-in terminals are used to connect external signals (binary inputs/outputs, analog inputs/outputs, pulse generators etc.). The firmware is saved in a flash EPROM and can be easily exchanged by loading via the serial interface of the SINAMICS DC MASTER.

Power section: Armature and field circuit

The armature circuit is implemented as a three-phase bridge circuit:

- For units for two-quadrant operation, in a fully-controlled three-phase bridge circuit B6C
- For units for four-quadrant operation in two fully-controlled three-phase bridge circuits (B6) A (B6) C.

The field circuit is implemented in a half-controlled single-phase bridge circuit B2HZ.

In the case of units with a 15 A to 1200 A rated DC current, the power sections for the armature and field include electrically isolated thyristor modules, which means that the heat sink is floating. For units up to 30 A, the armature and field power sections are implemented in the form of a printed circuit board with compact modules that are soldered on.

For units with rated currents ≥ 1500 A, the power section for the armature circuit uses disc-type thyristors and heat sinks at voltage potential. For units from 1500 to 3000 A, the thyristor phases are implemented as plug-in modules and can therefore be quickly replaced.

Checking the motor insulation has been significantly simplified due to the fact that the line supply voltage sensing for the armature and the field sections is electrically isolated.

Cooling

Units with a rated DC current up to 125 A are designed for natural air cooling, units with a rated current above 210 A are designed for forced air cooling (fan). The fans are always horizontally mounted at the top so that they can be quickly replaced without having to disconnect the power connections.

Parameterizing devices

BOP20 Basic Operator Panel



BOP20 Basic Operator Panel

As standard, all of the units are equipped with a BOP20 Basic Operator Panel from the SINAMICS family.

The basic operator panel offers customers a basic functionality for commissioning as well as operator control and monitoring.

Faults can be acknowledged, parameters set and diagnostics information read-out (e.g. alarm and fault messages) using the BOP20.

The BOP20 has a backlit two-line display area and 6 keys.

The BOP20 power supply and communication with the CUD Control Unit are established via the connector integrated at the rear of the BOP20.

AOP30 Advanced Operator Panel



The AOP30 Advanced Operator Panel is an optional input/output device for SINAMICS DC MASTER converters. It can be separately ordered. You will find additional information about the AOP30 in catalog section "Accessories and supplementary components".

PC based parameterization

The STARTER tool is available for PC-based commissioning and diagnostics. More detailed information is provided in catalog section 5 "Tools and engineering".

SINAMICS DCM

DC Converter and Control Module

DC Converter

More information (continued)

Closed-loop control and open-loop drive control

The closed-loop control and open-loop drive control is essentially designed for supplying the armature and field of variable-speed DC drives.

Using BICO technology permits the closed-loop and open-loop drive control structure to be simply adapted to the application-specific requirements as well as the use in alternative applications (e.g. as excitation equipment for synchronous motors).

The most important functions of the closed-loop control include:

- Setpoint processing (including digital setpoints, jogging, motorized potentiometer)
- Ramp-function generator
- Speed controller actual value processing
- Speed controller
- Torque and armature current control
- Closed-loop armature current control
- Armature gating unit
- Closed-loop EMF control
- Closed-loop field current control
- Field gating unit

BICO technology

BICO technology (Binector Connector Technology) allows signal paths to be defined (and therefore the controller structure) using parameters.

Mode of operation:

All important points of the closed-loop control are accessible via connectors.

Connectors are measuring points that are mapped to display parameters.

Important connectors include:

- Analog inputs and outputs
- Interface inputs (e.g. PROFIBUS)
- Actual value sensing inputs (e.g. speed, armature current, armature voltage)
- Inputs and outputs of the ramp-function generator, speed controller, armature current controller, armature gating unit, EMF controller, field current controller, field gating unit
- General quantities such as operating state, motor temperature rise, thyristor temperature rise

All important binary signals of the closed-loop and open-loop control are accessible via binectors.

Binectors are measuring points for binary signals, which are mapped to display parameters.

Important binectors include:

- Status of binary inputs
- Control words, status words
- Status of controllers, limits, faults

All of the important inputs of the open-loop and closed-loop control can be interconnected using BICO selection parameters. This means that by setting the corresponding BICO selection parameter, a connection can be established between any connector or binector.

Important inputs include:

- Setpoint input, supplementary setpoint input
- Ramp-function generator input
- Speed controller input
- Armature current controller input
- Armature gating unit input
- Speed setpoint limiting (before and after the ramp-function generator)
- Torque limiting
- Armature current limiting
- Signal source for binary and analog outputs

Data sets

Many open-loop and closed-loop control parameters depend on the particular data set. This means that they have several indices where various values can be set. All data set dependent parameters can be simultaneously switched over to another data set using binary control signals.

There are two groups of data set-dependent parameters:

- **DDS parameters:**
Parameters that are associated with the drive data set (DDS). The drive data set contains various adjustable parameters that are relevant for open-loop and closed-loop drive control.
- **CDS parameters:**
Parameters that are associated with the command data set (CDS). Many BICO selection parameters are combined in the command data set. These parameters are used to interconnect the signal sources of a drive.

By parameterizing several command data sets and switching between them, the drive can be operated with different pre-configured signal sources.

More information (continued)

Optimization run

The SINAMICS DC MASTER converter units are supplied with the factory settings. Controller setting is supported by selecting automatic optimization runs. The selection is made using special key numbers.

The following controller functions can be set using an automatic optimization run:

- Current controller optimization run to set the current controller and pre-controls (armature and field circuit).
- Speed controller optimization run for setting the speed controller characteristics; automatic recording of the friction and moment of inertia compensation for the speed controller pre-control.
- Automatic recording of the field characteristic for an EMF-dependent field-weakening control and automatic optimization of the EMF controller for field-weakening operation.
- In addition, all of the parameters set during the automatic optimization runs can be changed via the operator panel.

Monitoring and diagnostics

Displaying operating values

The operating state of the converter is displayed using a parameter. Several hundred signals can be displayed via parameter or selected for output on the display unit. Examples of measured values that can be displayed: Setpoints, actual values, status of binary inputs/outputs, line supply voltage, line frequency, firing angle, inputs/outputs of the analog terminals, controller input and output, limits.

Trace function

Up to eight measured quantities can be saved by selecting the trace function. A measured quantity or the occurrence of a fault signal can be parameterized as trigger condition. By selecting a trigger delay, it is also possible to record (trace) the pre-history and post-history of events. The sampling time of the measured value storage can be parameterized.

The measured values can be output via the serial interfaces using the STARTER commissioning tool.

Fault messages

A number is assigned to each fault message. In addition, the operating hour of the event is saved together with the fault message. This allows the cause of the fault to be quickly pinpointed. By using the optional AOP30 Advanced Operator Panel, fault messages can be stamped in real time. Then, instead of the operating hour of the event, the day and the time of day of the event is displayed in the AOP30 fault list. For diagnostic purposes, the last eight fault messages are saved with fault number, fault value and the operating hours.

When a fault occurs

- the binary output function "Fault" is set to LOW (user-assignable function),
- the drive is switched off (controller inhibit, current $I = 0$ is entered, pulses are inhibited, the relay "line contactor CLOSE" drops out) and
- an F is displayed with fault number, LED "Fault" is lit.

Fault messages should either be acknowledged via the operator panel, a binary user-assignable terminal or a serial interface. The "switch-on inhibit" state is reached after the fault has been acknowledged. "Switch-on inhibit" is canceled by an OFF command.

Automatic restart: An automatic restart is possible within a time that can be parameterized between 0 and 10 s. If the time is set to zero, a fault message is immediately output (for power failure) without a restart. A restart can be selected for the following fault messages: Phase failure (field or armature), undervoltage, overvoltage, electronics power supply failure, undervoltage condition at the parallel SINAMICS DC MASTER.

A distinction is made between the following groups of fault messages:

- Power system faults: Phase failure, fault in the field circuit, undervoltage, overvoltage, line frequency < 45 or > 65 Hz
- Interface faults: CUD interfaces or interfaces to the supplementary boards faulted
- Drive faults:
 - Controller monitoring for speed controller, Current controller, EMF controller, Field current controller has responded, Drive stalled, No armature current possible
- Electronic motor overload protection (I^2t monitoring of the motor has responded)
- Tachometer monitoring and overspeed signal
- Commissioning fault
- Fault on the electronics module
- Fault message from the thyristor check: This fault message can only occur if the thyristor check has been activated using the appropriate parameter. In this case, a check is made as to whether the thyristors can be blocked and whether they can be fired.
- Fault messages from the motor sensor system: Monitoring of brush length, bearing condition, air flow, motor temperature
- External faults via binary user-assignable terminals

The fault messages can be individually deactivated using a parameter. Some fault messages are already deactivated in the factory and can be activated using this parameter.

Alarms

Alarm messages display special states; however, they do not cause the drive to be switched off. Alarms that occur do not have to be acknowledged, but rather they are automatically reset as soon as the cause of the alarm is no longer present.

When one or several alarms occur

- the binary output function "Alarm" is set to LOW (user-assignable function) and
- the alarm is displayed by the flashing "Fault" LED.

A distinction is made between the following groups of alarms:

- Motor overtemperature: The calculated I^2t value of the motor has reached 100 %.
- Alarms from the motor sensor system: Monitoring of brush length, bearing condition, motor fan, motor temperature
- Drive alarms: Drive has stalled, no armature current possible
- External alarms via binary user-assignable terminals
- Alarms from supplementary modules

SINAMICS DCM

DC Converter and Control Module

DC Converter

More information (continued)

Functions of the inputs and outputs

Analog user-assignable inputs

After converting to a digital value, the quantity of the analog inputs can be flexibly adapted via parameters for scaling, filter, sign selection and offset input. The values are available as connector. This is the reason that the analog inputs can be effective as main setpoint and also as quantity for a supplementary setpoint or a limit.

Analog outputs

Selectable analog outputs are available to output analog signals. Analog signals can be output as bipolar signal or as absolute value. In this case, scaling, an offset, polarity and a filter time can be parameterized. The required output quantities are selected at the intervention points by entering connector numbers. For instance, speed actual value, ramp-function generator output, current setpoint, line supply voltage etc. can be output.

Binary inputs

- **Switch-on/shutdown (OFF 1)**
This terminal function is ANDed with the control bit of the serial interface. For an H signal at terminal *switch-on/shutdown*, the main contactor closes via an internal sequence control. The controllers are enabled if there is an H signal at the operating enable terminal. The drive accelerates up to the operating speed with the speed setpoint. For an L signal at the terminal *switch-on/shutdown*, the drive is ramped down to speed $n < n_{\min}$ via the ramp-function generator; after the brake control delay time, the controllers are inhibited and at $l = 0$, the main contactor is opened. After this, after an adjustable time after the main contactor has dropped out, the field current is reduced to the standstill field current (this can be parameterized). The standstill field can e.g. be used as anti-condensation heating for the motor; to do this, approximately 30 % of the rated field current must be entered as standstill field. The motor fan must be operational for a field current of 100 % of the rated field current. Otherwise, the field winding will be overloaded.
- **Operating enable**
This function is ANDed with the control bit of the serial interface. The controllers are enabled with an H signal at the *operating enable* terminal. For an L signal, the controllers are inhibited and at $l = 0$, the pulses are inhibited. The signal *operating enable* has a high priority; this means that if the signal (L signal) is withdrawn in operation, then this always results in $l = 0$ and therefore the drive coasts down.

Binary user-assignable inputs:

Additional binary input terminals are available for user-assignable functions. In this case, a binector number is assigned to every user-assignable terminal, which can be used for control functions.

Examples of binary input functions:

- **Voltage disconnect (OFF 2):** For OFF 2 (L signal), the controllers are instantaneously inhibited, the current in the armature circuit is reduced and at $l = 0$, the main contactor is opened. The drive coasts down uncontrolled.
- **Quick stop (OFF 3):** For a quick stop (L signal), the speed setpoint at the speed controller input is set to zero and the drive is braked along the current limit for quick stop (parameterizable). At $n < n_{\min}$ after the brake control delay time $l = 0$ is entered and the main contactor is opened.
- **Jogging:** The jogging function is available for an L signal at terminal *switch-on/shutdown*, for an H signal at terminal *operating enable* and when the jogging function is controlled. In this case, the main contactor is closed and the drive accelerates up to the jogging setpoint defined in a parameter. When the jogging signal is withdrawn, the drive is braked to $n < n_{\min}$; after this, the controllers are inhibited and the main contactor is opened after a parameterizable time (0 to 60 s). Further, it can be selected as to whether the ramp-function generator is active or ramp-up time = ramp-down time = 0 is used.

Binary outputs

User-assignable signaling functions are available at the binary output terminals (open emitter output). Any binector quantity, which can be selected via the associated user-assignable parameter, can be output for each terminal. The polarity of the output signal and an adjustable delay time (0 to 10 s) can be selected using parameters.

Examples of binary output functions:

- **Fault:** An L signal is output when a fault message is present.
- $n < n_{\min}$: An H signal is output for speeds less than n_{\min} . This signal is used, for instance, as a zero speed signal.
- **Switch-on command for a mechanical brake:** A motor brake can be controlled using this signal.

When switching on the drive using the "switch-on" function and entering "operating enable", an H signal is output to open the brake, in this case, the internal controller enable is delayed by a parameterizable time (wait for the mechanical brake opening time to expire). When shutting down the drive using the "shutdown" function or "quick stop", an L signal is output to close the brake when speed $n < n_{\min}$ is reached. At the same time, the internal controller enable is present for a parameterizable time (wait for the mechanical brake closing time to expire): When $l = 0$ is entered, the pulses are inhibited and the main contactor is opened.

An additional operating mode can be selected using the "close brake" signal (L signal at the binary user-assignable output). As a consequence, when the "internal controller inhibit" is present (the drive is in a no-current condition), the drive does not wait for the status $n < n_{\min}$, but the brake is already controlled (operating brake) at speeds greater than n_{\min} .

Internal control inhibit is present when a fault message occurs, when the voltage is disconnected or the operating enable – terminal *operating enable* – is withdrawn in operation.

More information (continued)

Safety shutdown (E-STOP)

The E-STOP function is used to open the relay contact for the main contactor control within approximately 15 ms independently of semiconductor components and the correct functioning of the CUD. If the CUD is operating correctly, entering $I = 0$ via the control ensures that the main contactor is switched in a no-current condition. The drive coasts down once E-STOP has been entered.

After the E-STOP has been reset, the drive goes into the "switch-on inhibit" operating state. This must be acknowledged by activating the "shutdown" function e.g. by opening terminal *switch-on/shutdown*.

Note:

The E-STOP function is not an EMERGENCY OFF function in the sense of EN 60204-1.

Serial interfaces

The following serial interfaces are available for each CUD:

- A serial interface on the Standard CUD and Advanced CUD for the USS protocol according to RS232 or RS485 to connect the optional AOP30 Advanced Operator Panel or for STARTER via a PC.
- A serial interface at the terminals of the Standard CUD and Advanced CUD, RS485 two-wire or four-wire for a peer-to-peer connection.
- PROFIBUS DP as standard on the Standard CUD and Advanced CUD
- PROFINET via the CBE20 Communication Board on the Advanced CUD (option)
- EtherNet/IP via the CBE20 Communication Board on the Advanced CUD (option)
- DRIVE-CLiQ on Advanced CUD (option) to connect optional SINAMICS components SMC30, TM15, TM31 and TM150

Physics of the interfaces

- RS232: ± 5 V interface for the point-to-point connection
- RS485: 3.3 V common mode interface, interference-proof, additionally for one bus connection with a maximum of 31 participants connected to the bus

USS protocol

Open Siemens protocol, can be simply programmed e.g. on the PC in third-party systems, any master interfaces can be used. The drives operate as slaves connected to a master. The drives are selected using a slave number.

The following data exchange is possible via the USS protocol:

- PKW data to read and write parameters
- PZD data (process data) such as control words, setpoints, status words, actual values

The send data (actual values) are selected by entering connector numbers in the parameters, the receive data (setpoints) represent the connector numbers, that can act at any intervention points.

Peer-to-peer protocol

The peer-to-peer protocol is used to connect devices with one another. For this operating mode, data is exchanged between converters via a serial interface, e.g. to establish a setpoint cascade. By using a serial interface as four-wire cable, data can be received from the previous unit that is then processed (e.g. by being multiplied) and then transferred to the following unit. Only one serial interface is used for this purpose.

The following data can be exchanged between converters:

- Sending control words and actual values.
- Receiving status words and setpoints.

In this case, up to five data words are transferred in both the send and receive directions. Data is exchanged via connector numbers and intervention points.

The serial interfaces can be simultaneously operated. A connection to the automation (USS protocol) can be established via the first interface for control, diagnostics and to enter the main setpoint. A second interface is used to realize a setpoint cascade function via the peer-to-peer protocol.

Control terminal block

Terminals on the CUD

- Reference voltage P10, 10 mA load rating, Reference voltage N10, 10 mA load rating
- 2 analog inputs via differential amplifier, resolution ± 14 bits
0 ... ± 10 V, 0 ... ± 20 mA, 4 ... 20 mA
- 1 analog input via differential amplifier, resolution ± 14 bits
0 ... ± 10 V
- 4 analog inputs via differential amplifier, resolution ± 11 bits
0 ... ± 10 V
- One analog input for motor temperature sensor via PT100, PTC or KTY84
- 2 analog outputs, referred to ground, 0 ... ± 10 V, ± 15 -bit resolution, max. 2 mA
- Pulse encoder evaluation for 5 or 24 V encoder, 2 tracks and zero mark, maximum frequency 300 kHz
- P15 power supply, 200 mA for a pulse encoder
- 4 binary inputs, referred to ground, 2 with selectable function
- 4 binary inputs/outputs, referred to ground, outputs with open emitter P24, 100 mA load rating
- 4 binary outputs, referred to ground, open emitter P24, 100 mA load rating
- One serial interface, RS485 two-wire or four-wire, max. 187.5 kBaud
- P24 power supply to control the binary inputs
- Terminals for equipment ground "digital" (e.g.: to connect the loads of the binary outputs)
- Terminals for equipment ground "analog" (e.g.: to connect the reference potentials of analog inputs)
- Connector to connect an AOP30
- Connector to connect a serial RS232 interface and a 5 V power supply, 300 mA (e.g.: for a pulse encoder)

Terminals on the gating module

- Analog tachometer 8 to 270 V for maximum speed
- E-STOP

SINAMICS DCM

DC Converter and Control Module

DC Converter

More information (continued)

Interface to the motor

Motor temperature monitoring

Either PTC thermistors or linear temperature sensors (KTY84-130) can be connected. One input is provided on the Standard CUD and one input on the Advanced CUD option for this purpose. An alarm or fault message can be parameterized for PTC thermistors. When using a KTY84-130, one threshold can be entered for an alarm and one threshold for shutdown (trip). The limit values are displayed and entered in °C.

In addition, a thermo switch can be evaluated by the Advanced CUD (option). A parameterizable alarm or fault message can be output when the thermo switch responds (this is a binary switching signal). The evaluation is realized via a binary user-assignable input.

Brush length monitoring

The brush length is monitored using a floating microswitch; the shortest brush is evaluated. If the useful brush life has expired, then the microswitch opens; an alarm or fault message can be parameterized. The evaluation is realized via a binary user-assignable input.

Monitoring the motor fan airflow

The airflow is monitored by an airflow monitor integrated in the airflow circuit of the motor fan. When this responds, an alarm or fault message is issued. The evaluation is realized via a binary user-assignable input.

Siemens DC motors

Although the end of DC technology has been forecast now for many years, we will keep hold of our DC technology and it will remain in our portfolio. When all is said and done, DC motors have proven themselves in daily use for decades now and they are essentially indispensable.

In conjunction with the SINAMICS DC MASTER converters, they always form the ideal team – wherever favorably-priced drive technology and the highest degree of availability are demanded.

These motors can also be used where space is restricted thanks to their compact and modular design.

Further, an extensive range of equipment and devices for mounting on the motor is available. A wide range of monitoring and diagnostic options facilitate reliable and disturbance-free operation.

Detailed specifications regarding quality assurance and improvement are integrated in all of the various operations and processes – from motor development through to production and service. Quality management coordinates the interaction between all of the company processes to ensure error-free and smooth processes.

It goes without saying that our stringent quality requirements also apply to our suppliers. All of the suppliers must seamlessly integrate themselves into our quality management system.

The result: Only fault-free and high quality materials are released for use in our motor production.



Customer benefits:

- High power density with low envelope dimensions
- High degree of operational reliability and availability through a wide range of diagnostic features, in conjunction with the SINAMICS DC MASTER converter
- High thermal reserves for continuous and overload conditions as a result of the DURIGNIT 2000[®] insulation system
- Low losses through a very good efficiency
- Long brush lifetimes through an optimized current commutation system

Technical specifications

Power range	31.5...1610 kW
Rated armature voltage	420 ... 810 V DC
Field	Separately excited
Shaft heights	160 ... 630 mm
Number of poles	4- and 6-pole
Speed	Up to 4500 rpm
Degree of protection	IP23 and IP54
Type of construction	IM B3, IM B35, IM V1 and others
Cooling method	IC06/IC17/IC37/IC A06 A66/IC W37 A86
Stator version	Fully laminated
Standards	IEC, EN, DIN, VDE
Operation	Converter operation, 2Q and 4Q, S1 – S9

Typical applications:

- Lift and cableway drives
- Rolling mill drives and winders
- Hoisting and travel gear drives for cranes
- Extruders in the plastics industry
- Drives for printing machines
- Drives for paper machines

Additional information on Siemens DC motors is available on the Internet under:

<http://www.automation.siemens.com/ld/dc-motor>

Application



The SINAMICS DC MASTER Control Module is mainly used for retrofitting and modernizing DC drives in existing plants and systems. There are many older DC installations in existence which cannot be linked to modern automation systems.

When such plants and systems are retrofitted or upgraded, the motor, mechanical system and power section are retained and only the closed-loop control section is replaced by a Control Module. As a consequence, an extremely favorably-priced modern DC drive is obtained with the full functional scope of the well-proven, fully digital units from the SINAMICS DC MASTER series.

The new system is adapted to the configuration of the existing components using simple parameterization.

The SINAMICS DC MASTER Control Module contains a power section for the field supply with a rated current of 40 A.

Design

The SINAMICS DC MASTER Control Module sets itself apart as a result of its compact, space-saving design. The compact design where all of the individual components are easily accessible offers a high degree of service friendliness.

In order to be able to optimally use the mounting and installation possibilities in the plant or system, the SINAMICS DC MASTER Control Module can be split depthwise. In addition, the PC boards for generating and distributing firing pulses, and for fuse monitoring and voltage sensing are designed in such a way that they can be installed outside the device in close proximity to the power section.

Alternatively, when commissioning the drive system with STARTER, the adaptations, settings and measured value displays required can be made using the BOP20 Basic Operator Panel or the AOP30 Advanced Operator Panel.

The AOP30 offers a favorably-priced alternative to measuring equipment installed in the electrical cabinet.

The field is supplied from a single-phase, semi-controlled bridge circuit B2HZ. The field power section is implemented using electrically insulated thyristor modules, which means that the heat sink is floating.

Technical specifications

For general technical specifications, see section "DC Converters"

		Type
		6RA8000-0MV62-0AA0
Rated armature supply voltage that can be sensed	V	50/125/250/575/1000
Rated supply voltage, electronics power supply	V	24 DC (18 ... 30 V DC); $I_n = 5 \text{ A}$
Rated field supply voltage ¹⁾	V	480 2 AC (+10/-20 %)
Rated frequency	Hz	45 ... 65
Rated DC field voltage ¹⁾	V	Max. 390
Rated DC field current	A	40
Normal ambient temperature in operation	°C	0 ... +55
Dimensions		
• Width	mm	271
• Height	mm	388
• Depth	mm	253
Weight, approx.	kg	12

¹⁾ The field supply voltage can lie below the rated field voltage (set using a parameter, input voltages of up to 85 V are permissible). The output voltage decreases accordingly. The specified DC output voltage can be reliably provided up to a 5 % undervoltage of the line supply voltage (rated field supply voltage).

SINAMICS DCM

DC Converter and Control Module

Control Module

Selection and ordering data

Rated data			Control Module	Fuses
Armature circuit	Field circuit		Article No.	Field circuit
Rated supply voltage ¹⁾	Rated supply voltage ¹⁾	Rated current		Type
V	V	A		1 each
50/125/250/575/1000 V 3 AC	480 2 AC (+10/-20 %)	40	6RA8000-0MV62-0AA0	3NE1802-0 ²⁾

Options

Note:

When ordering a unit with options, add the suffix "-Z" to the Article No. of the unit and then state the order code(s) for the desired option(s) after the suffix.

Example:
6RA8000-0MV62-0AA0-Z
G00+G20+L10+...

Available options

The following table provides an overview of the available options. Detailed descriptions of the options are provided in the section "Description of options".

Designation	Order code	Notes	Article No. for separate order	
			not coated	coated
CUD				
Standard CUD left	(Standard)	–	6RY1803-0AA00-0AA1	6RY1803-0AA20-0AA1
Advanced CUD left	G00	–	6RY1803-0AA05-0AA1	6RY1803-0AA25-0AA1
Standard CUD right	G10	This option requires an Advanced CUD left – order code G00	6RY1803-0AA00-0AA1 ⁴⁾	6RY1803-0AA20-0AA1 ⁴⁾
Advanced CUD right	G11	This option requires an Advanced CUD left – order code G00	6RY1803-0AA05-0AA1 ⁴⁾	6RY1803-0AA25-0AA1 ⁴⁾
Communication Board CBE20 left	G20	This option requires an Advanced CUD left – order code G00	–	6SL3055-0AA00-2EB0
Communication Board CBE20 right	G21	This option requires an Advanced CUD right – order code G11	–	6SL3055-0AA00-2EB0
Memory card left	S01	–	6RX1800-0AS01	–
Memory card right	S02	This option requires a Standard CUD right – order code G10 – or an Advanced CUD right – order code G11	6RX1800-0AS01	–
Field				
Field power section 1Q	(Standard)	–	– ³⁾	– ³⁾
Field power section 2Q	L11	–	– ³⁾	– ³⁾
Without field power section	L10	–	–	–
Additional options				
Terminal Module Cabinet	G63	–	6RY1803-0AB05	–
Coated PCBs	M08	–	–	–
Nickel-plated copper busbars	M10	–	–	–
Control for switching over the power section topology for parallel and series connections	S50	–	–	–
Extension of the liability for defects	Q80 ... Q85	See section "Description of options"	–	–

¹⁾ 50/60 Hz

²⁾ UL-recognized

³⁾ Available as a spare part.

⁴⁾ The Standard CUD (uncoated 6RY1803-0AA00-0AA1; coated 6RY1803-0AA20-0AA1) and the Advanced CUD (uncoated 6RY1803-0AA05-0AA1; coated 6RY1803-0AA25-0AA1) can be inserted in either the left-hand or the right-hand slot and therefore have an article number which does not refer to a specific slot. A Connector Board (6RY1803-0GA00 or 6RY1803-0GA20) is also needed in order to retrofit a CUD.

Accessories

The SINAMICS DC MASTER Control Module can be split up into several individual modules. These can be mounted separately from one another.

Optional, pre-fabricated cable sets are available to connect the individual modules. This means that the drive system can be quickly but also flexibly adapted to the plant or system configuration.

Description	Content	Connection	Article No.
Rear enclosure part including accessories for mounting the firing pulse transformer module and/or fuse monitoring module for a parallel connection	Set of loose parts		6RY1805-0CM00
Screws, stud bolts, and snap-on parts to externally mount module parts	Set of loose parts		6RY1807-0CM00
Pre-fabricated connection set ribbon cable: To connect the two cradles when separately mounted	2x 26-core ribbon cables shielded (3 m long) 1x 10-core ribbon cable shielded (3 m long) 1x 20-core ribbon cable shielded (3 m long) 1x RJ45 patch cable shielded (3 m long)	from X21A, X22A on PCB -A7109- to X21A, X22A on PCB -A7043- from X23B on PCB -A7109- to X23B on PCB -A7118- from XF1 on PCB -A7109- to XF1 on PCB -A7116- from X45 on PCB -A7109- to X45 on PCB -A7117-	6RY1807-0CM01
Pre-fabricated connection set ribbon cable: To connect the two cradles when separately mounted	2x 26-core ribbon cables shielded (10 m long) 1x 10-core ribbon cable shielded (10 m long) 1x 20-core ribbon cable shielded (10 m long) 1x RJ45 patch cable shielded (10m long)	from X21A, X22A on PCB -A7109- to X21A, X22A on PCB -A7043- from X23B on PCB -A7109- to X23B on PCB -A7118- from XF1 on PCB -A7109- to XF1 on PCB -A7116- from X45 on PCB -A7109- to X45 on PCB -A7117-	6RY1807-0CM02
Pre-fabricated connection set for current transformer	2x 2-core twisted cables (2 m long)	from XB on PCB -A7109- to the current transformers	6RY1707-0CM03 ¹⁾
Pre-fabricated connection set for current transformer	2x 2-core cable shielded (10 m long)	from XB on PCB -A7109- to the current transformers	6RY1707-0CM04 ¹⁾
Pre-fabricated connection set for heat sink temperature sensing	1x 2-core shielded cable (10 m long)	from XT6 on PCB -A7109- to temperature sensor on the heat sink	6RY1707-0CM05 ¹⁾
Pre-fabricated connection set for firing pulse	Connection set for 12x 2-core twisted cables (3 m long)	from XIMP11, XIMP12, XIMP13, XIMP14, XIMP15, XIMP16 XIMP21, XIMP22, XIMP23, XIMP24, XIMP25, XIMP26 to the thyristors	6RY1707-0CM06 ¹⁾
Pre-fabricated connection set for fuse monitoring	6x 2-core twisted cables (10 m long)	from XS1_5, XS2_5, XS3_5, XS4_5, XS5_5, XS6_5, XS7_5, XS8_5, XS9_5, XS10_5, XS11_5, XS12_5 or XS1_4, XS2_4, XS3_4, XS4_4, XS5_4, XS6_4, XS7_4, XS8_4, XS9_4, XS10_4, XS11_4, XS12_4 or XS1_3, XS2_3, XS3_3, XS4_3, XS5_3, XS6_3, XS7_3, XS8_3, XS9_3, XS10_3	6RY1807-0CM07
Pre-fabricated connection set for voltage sensing	1x 3-core twisted cable U-V-W (3 m long) 1x 2-core twisted cable C-D (3 m long)	from XU6, XV6, XW6 or XU5, XV5, XW5 or XU4, XV4, XW4 or XU3, XV3, XW3 or XU2, XV2, XW2 or XU1, XV1, XW1 depending on voltage (5.6 V, 50 V, 125 V, 250 V, 575 V or 1000 V) to supply XC6, XD6 or XC5, XD5 or XC4, XD4 or XC3, XD3 or XC2, XD2	6RY1807-0CM08
Pre-fabricated connection set for controlling the firing pulse transformers	12x 2-core twisted cables (1 m long)	from XIMP1, XIMP4 or XIMP2, XIMP5 or XIMP3, XIMP6 on PCB -A7043- (side sections) to firing pulse transformer modules (single boards) with terminals X11, X12, X13, X14, X15, X16, X21, X22, X23, X24, X25, X26	6RY1707-0CM13 ¹⁾
Pre-fabricated connection set for controlling firing pulse transformers	2x 12-core cables, shielded (10 m long)	from XIMP1, XIMP4 and/or XIMP2, XIMP5 and/or XIMP3, XIMP6 on PCB -A7043- to external firing pulse transformers	6RY1707-0CM10 ¹⁾
Pre-fabricated connection set for mounting cradles next to each other	2x 26-core ribbon cables shielded (0.68 m long) 1x 10-core ribbon cable shielded (0.5 m long) 1x 20-core ribbon cable shielded (0.76 m long) 1x RJ45 patch cable shielded (1 m long)	from X21A, X22A on PCB -A7109- to X21A, X22A on PCB -A7043- from X23B on PCB -A7109- to X23B on PCB -A7118- from XF1 on PCB -A7109- to XF1 on PCB -A7116- from X45 on PCB -A7109- to X45 on PCB -A7117-	6RY1807-0CM11
Fuse monitoring distribution module for parallel connection of fuse monitors	Module including 3 m ribbon cable to connect to the SINAMICS DCM Control Module; can be snapped onto mounting rails according to DIN EN 50022-35x7.5	X23A on Power Interface Control Module and fuse monitor	6RY1803-0CM26

¹⁾ Unchanged when compared to the SIMOREG DC-MASTER Control Module.


SINAMICS DCM

DC Converter and Control Module


Control Module

Circuit diagrams

3

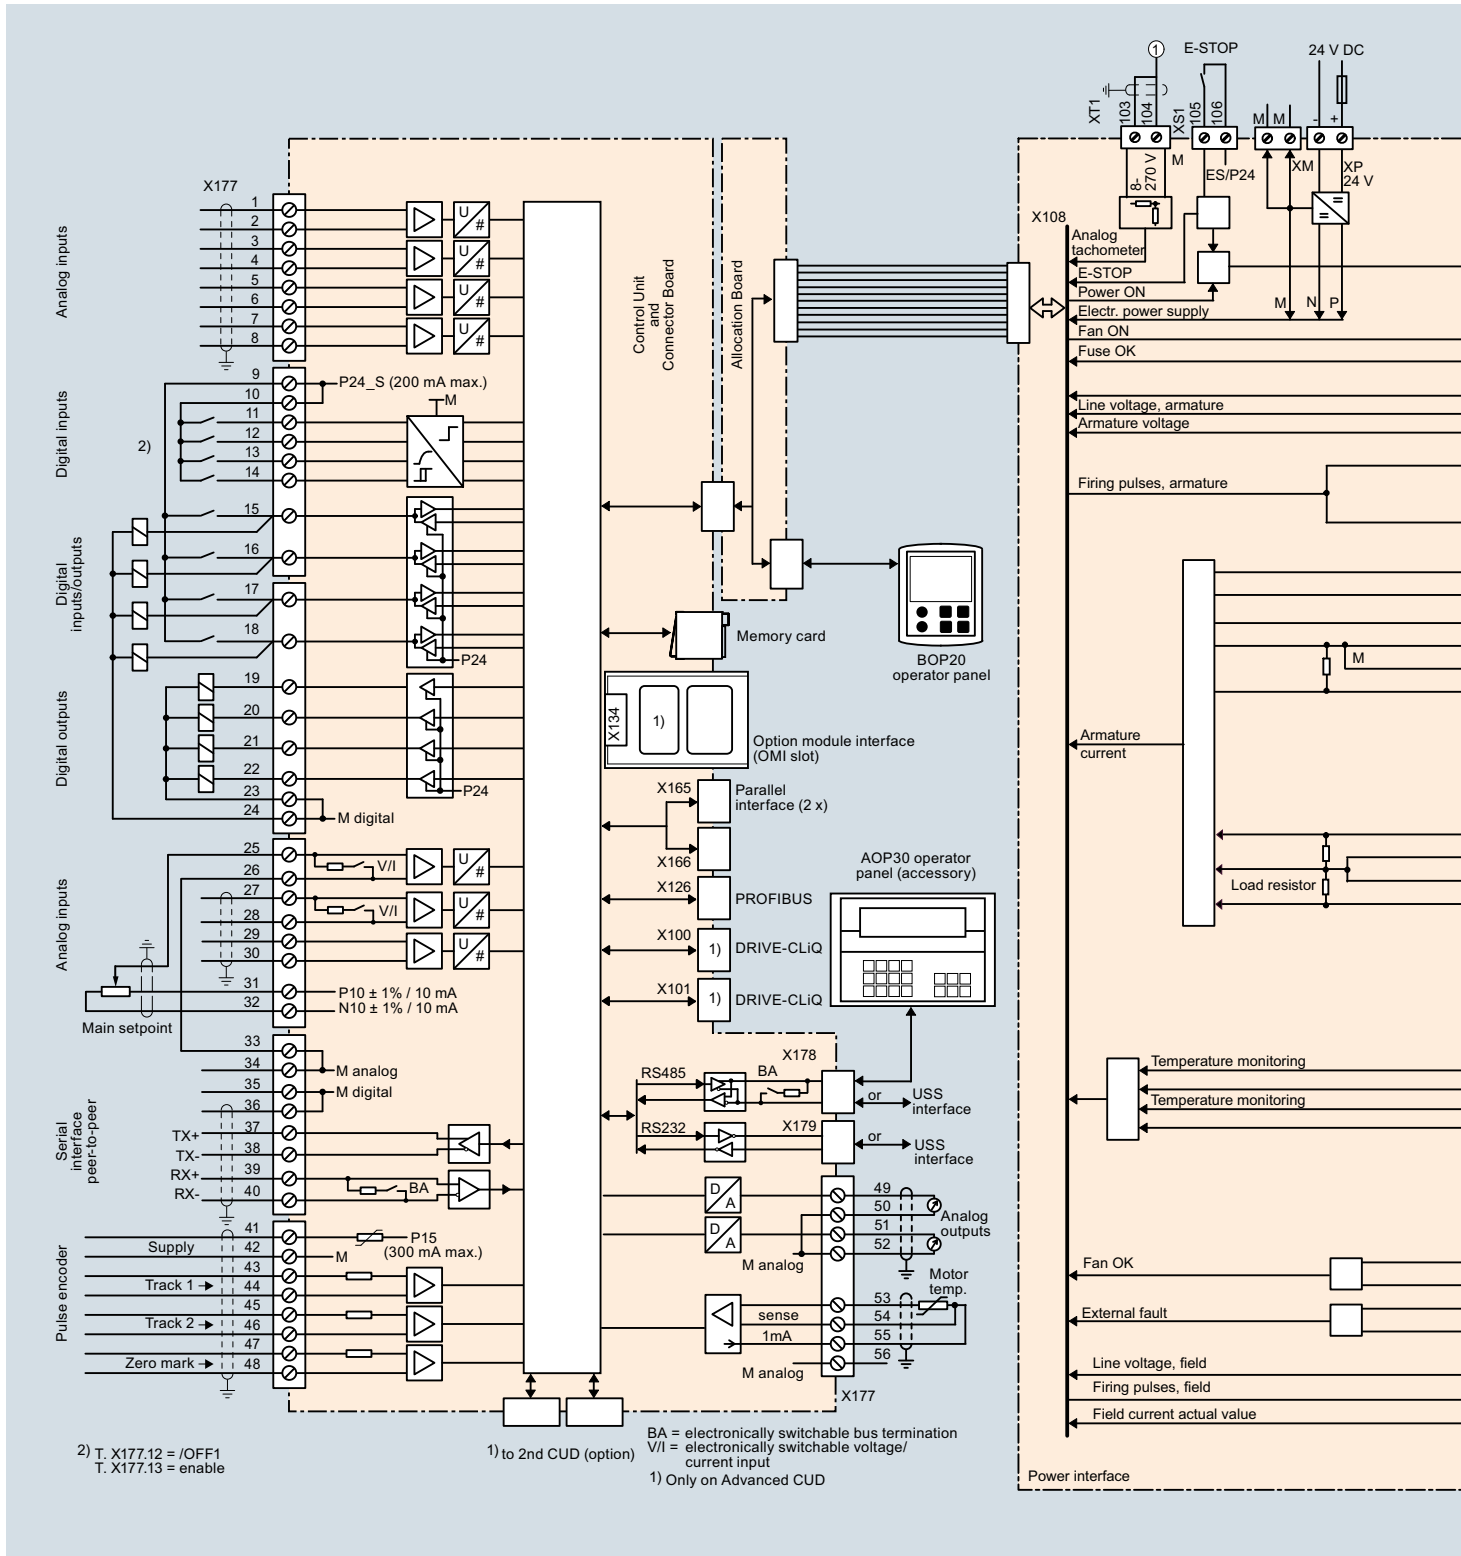

Circuit diagrams (continued)

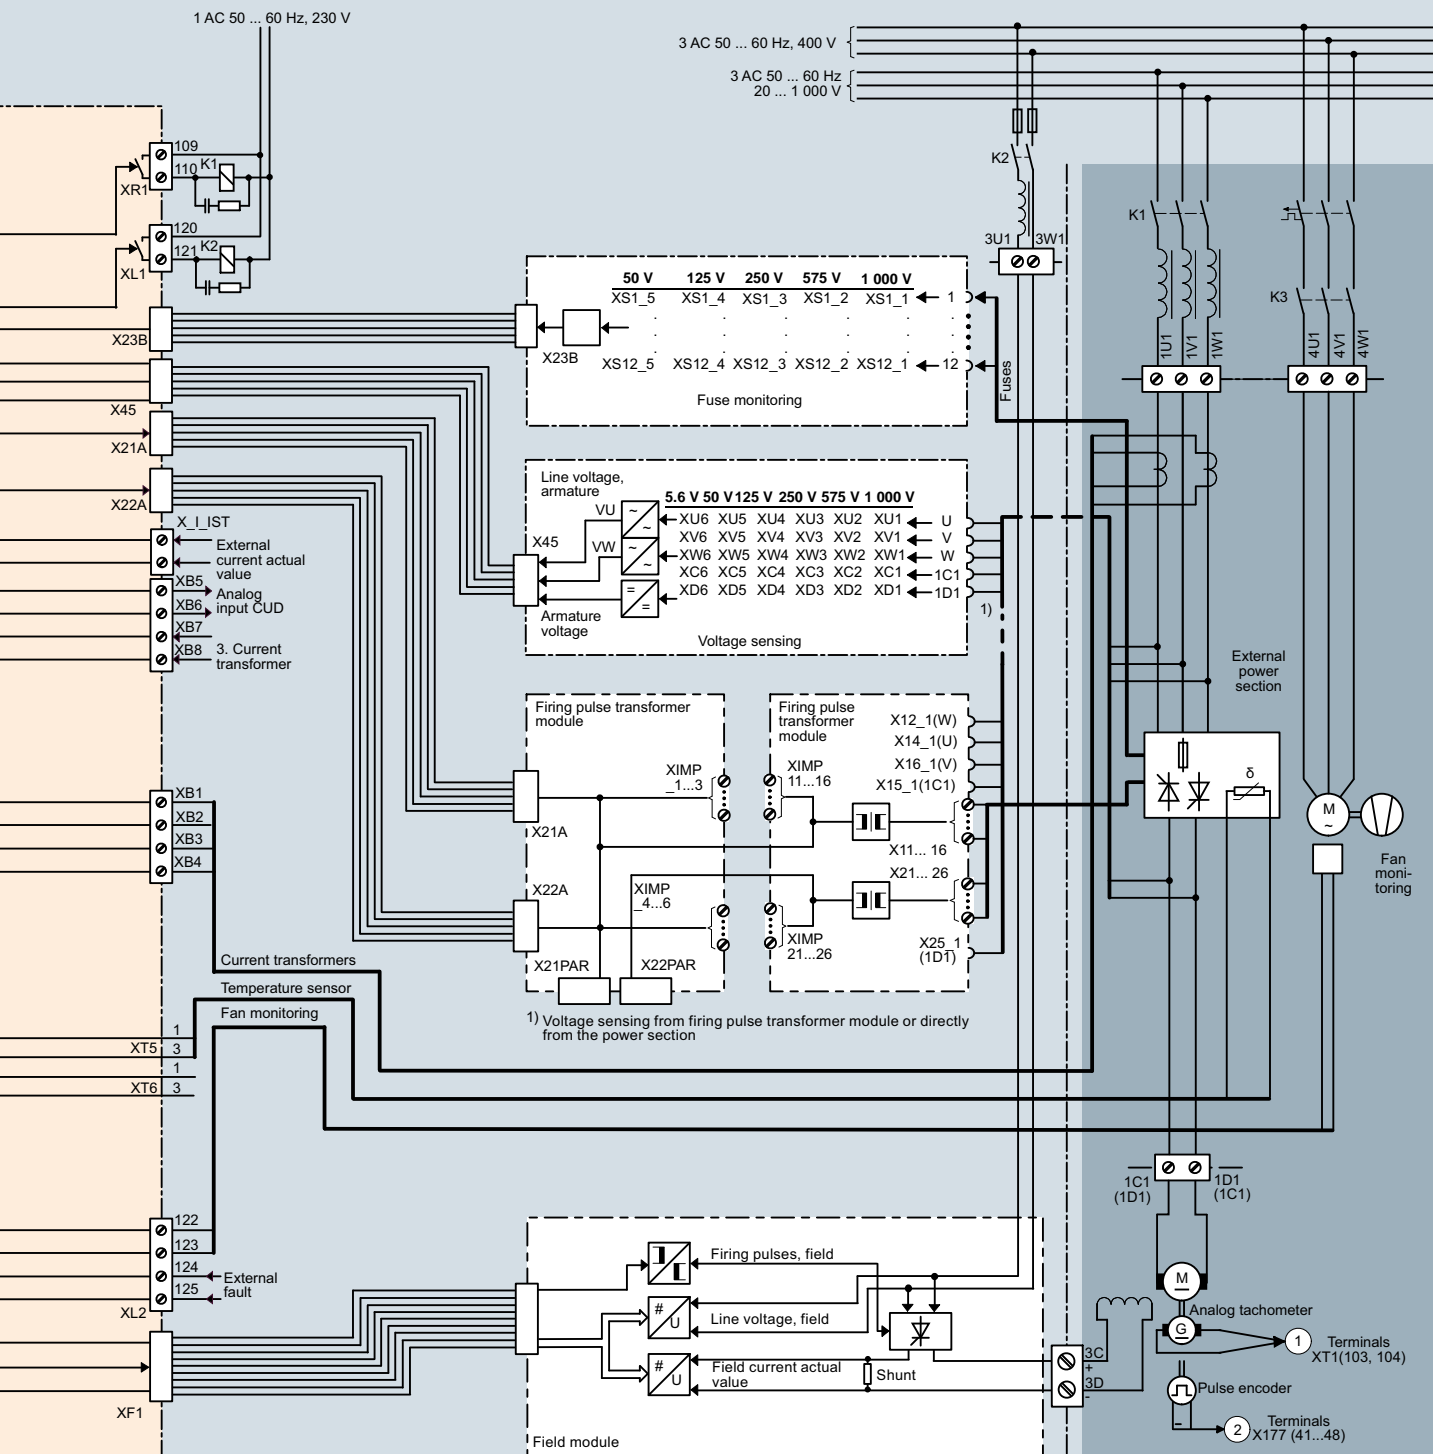

G_D023_EN_00069a

3

SINAMICS DCM

DC Converter and Control Module

Notes

3

Accessories and supplementary components



4/2 AOP30 Advanced Operator Panel

- 4/2 Overview
- 4/3 Function
- 4/3 Selection and ordering data

4/4 SMC30 Sensor Module Cabinet-Mounted

- 4/4 Overview
- 4/4 Design
- 4/4 Integration
- 4/4 Technical specifications
- 4/4 Selection and ordering data
- 4/4
 - SMC30 Sensor Module Cabinet-Mounted
 - DRIVE-CLiQ cables
- 4/5

4/5 TM15 Terminal Module

- 4/5 Overview
- 4/5 Design
- 4/6 Integration
- 4/7 Technical specifications
- 4/7 Selection and ordering data
- 4/7
 - TM15 Terminal Module
 - DRIVE-CLiQ cables
- 4/7

4/8 TM31 Terminal Module

- 4/8 Overview
- 4/8 Design
- 4/9 Integration
- 4/10 Technical specifications
- 4/10 Selection and ordering data
- 4/10
 - TM31 Terminal Module
 - DRIVE-CLiQ cables
- 4/10

4/11 TM150 Terminal Module

- 4/11 Overview
- 4/11 Design
- 4/11 Technical specifications
- 4/11 Selection and ordering data
- 4/12 Integration

4/13 Mounting kit to upgrade to IP20

- 4/13 Overview
- 4/13 Selection and ordering data

4/14 Line fuses

- 4/14 Overview
- 4/14 Selection and ordering data
- 4/14
 - Fuses for the field circuit
 - Fuses for the armature circuit
- 4/14

4/18 Commutating reactors

- 4/18 Overview
- 4/19 Selection and ordering data

4/22 Circuit breakers and contactors

- 4/22 Overview
- 4/22
 - Selection criteria

4/23 Radio interference suppression filters

- 4/23 Overview
- 4/23
 - List of recommended radio interference suppression filters from EPCOS
- 4/23

4/24 SICROWBAR AC

- 4/24 Application
- 4/24 Design
- 4/24 Mode of operation
- 4/24 Configuration
- 4/25 Technical specifications
- 4/26 Selection and ordering data
- 4/26 Accessories

4/27 SICROWBAR DC

- 4/27 Application
- 4/27 Design
- 4/27 Mode of operation
- 4/28 Configuration
- 4/29 Technical specifications
- 4/30 Selection and ordering data
- 4/30 Accessories
- 4/30 Options

4/31 SIMOREG CCP

- 4/31 Overview
- 4/31 Benefits
- 4/31 Design
- 4/31 Function
- 4/32 Integration
- 4/33 Technical specifications
- 4/34 Selection and ordering data
- 4/34 Accessories
- 4/35 Circuit diagrams

SINAMICS DCM

Accessories and supplementary components

AOP30 Advanced Operator Panel

Overview



The AOP30 Advanced Operator Panel is an optional input/output device for SINAMICS DC MASTER converters. It can be separately ordered. The operator panel is only designed for installation outside the converter (e.g. in a cabinet door up to 4 mm thick), installation cut-out 141.5 × 197.5 mm.


It sets itself apart as a result of the following properties:

- Graphics-capable LCD display (240 × 64 pixels) with backlighting for plain-text display and a bar-type display for process variables
- LEDs for displaying the operating states
 - RUN green
 - ALARM yellow
 - FAULT red
- Help function describing the causes of faults and alarms and how to resolve them
- Time and date memory with internal battery backup
- 26-key membrane keyboard
 - Keypad for operational control of a drive
 - Local/remote switchover for selecting the operator control location (operator panel or customer terminal strip/communications channel has the control authority)
 - Numeric keypad for entering setpoints or parameter values
 - Function keys for prompted navigation in the menu
- RS232 and RS485 interface
- Connection for a 24 V power supply
- The converter can be controlled using the AOP30 up to distances of 200 m. A cable with integrated 24 V power supply can be ordered in standard lengths as an accessory.
- Two-stage safety strategy to protect against accidental or unauthorized changes to settings.
 - Operation of the drive from the operator panel can be disabled using the control inhibit function so that only parameter values and process variables can be displayed on the operating panel.
 - A password can be used to prevent converter parameters being changed by unauthorized personnel.
- Front panel with degree of protection IP55, IP20 at rear


The AOP30 communicates with the SINAMICS DC MASTER drive via the serial RS485 interface.

The AOP30 can communicate with the Standard CUD as well as with the Advanced CUD of the SINAMICS DC MASTER.


A 24 V power supply is required to operate the AOP30. For a maximum cable length of 50 m, this can be taken from the CUD of the SINAMICS DC MASTER. An external power supply must be used for cable lengths greater than 50 m.

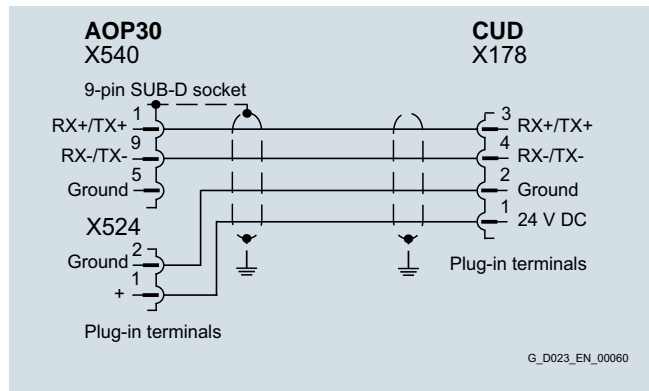

Assignment of the RS485 cable with a 24 V power supply from the CUD – max. cable length 50 m

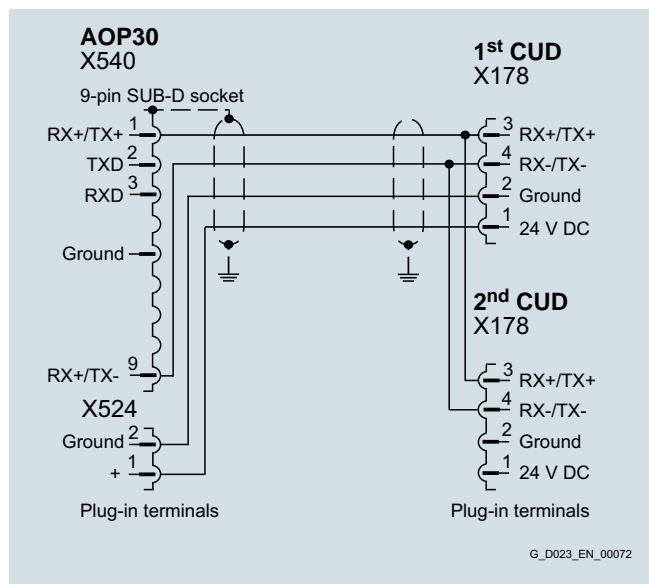


Assignment of the RS485 cable when using two CUDs (24 V power supply from one CUD) – max. cable length 50 m

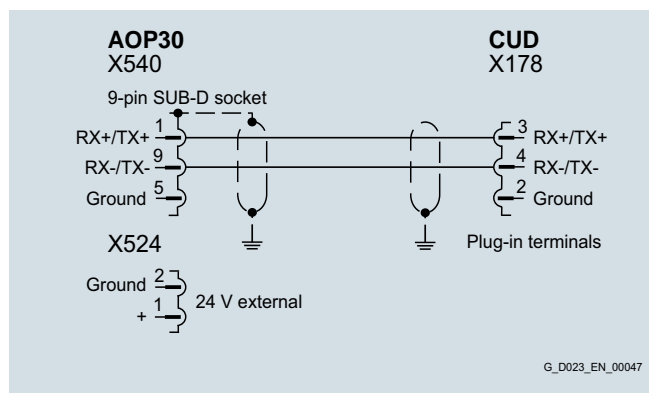

Assignment of the RS485 cable when supplying the AOP30 from an external 24 V DC source – max. cable length 200 m

Overview (continued)

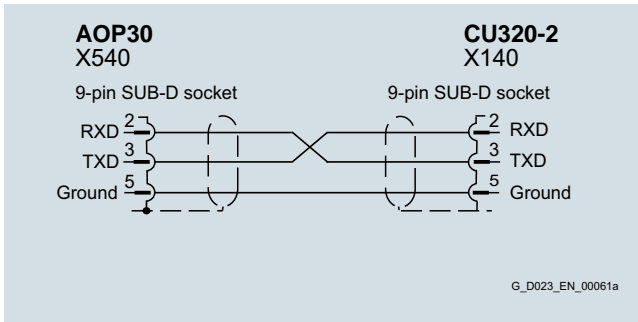

Assignment of the RS232 cable for connecting to an AC SINAMICS unit (not for SINAMICS DC MASTER!)

Function

The current operating states, setpoints and actual values, parameters, indices, faults and alarms are displayed on the display panel.

German and English are integrated in the SINAMICS DC MASTER as standard. Additional languages, if the memory card with a corresponding language package is inserted in every CUD.

Note:

Only operator panels with Article Nos. 6SL3055-0AA00-4CA4 and 6SL3055-0AA00-4CA5 have a second RS485 interface. Preliminary models are not suitable for SINAMICS DC MASTER.

Selection and ordering data

Description	Article No.
AOP30 Advanced Operator Panel	6SL3055-0AA00-4CA5

A connecting cable with integrated 24 V supply is available to connect the AOP via RS485.

RS485 cable to connect the AOP	Length m	Article No.
to a CUD	3	6RY1807-0AP00
to two CUDs	3	6RY1807-0AP10

Other cable lengths can be ordered with the following options.

Cable length	Order code
5 m	K05
10 m	K10
15 m	K15
20 m	K20
25 m	K25
30 m	K30
35 m	K35
40 m	K40
45 m	K45
50 m	K50

Note:

When ordering the RS485 cable with option, add the suffix "-Z" to the Article No. followed by the order code for the required option.

Ordering example for cable length 35 m: **6RY1807-0AP00-Z K35**

SINAMICS DCM

Accessories and supplementary components

SMC30 Sensor Module Cabinet-Mounted

Overview



Every CUD (both Standard CUD as well as also Advanced CUD) can evaluate the signals of an incremental encoder. For applications where more than one encoder must be evaluated, either a second CUD and/or SMC30 Sensor Module Cabinet-Mounted can be used.

The SMC30 can be used to evaluate SSI encoders with incremental signals, which for instance, are used for positioning functions.

Encoders, which have a DRIVE-CLiQ interface, cannot be evaluated at the SINAMICS DC MASTER or at the SMC30. These encoders are usually not used in DC drive technology.

The following encoder signals can be evaluated:

- Incremental encoders TTL/HTL with and without broken cable detection (broken cable detection is only available with bipolar signals)
- SSI encoder with TTL/HTL incremental signals
- SSI encoder without incremental signals

The motor temperature input, available on the SMC30, is not evaluated for SINAMICS DC MASTER. A motor temperature sensor can be evaluated using the temperature measurement input provided on each CUD.

Design

The SMC30 Sensor Module Cabinet-Mounted features the following interfaces as standard:

- 1 DRIVE-CLiQ interface
- 1 encoder connection via Sub-D connector or terminals
- 1 connection for the electronics power supply via the 24 V DC power supply connector
- 1 PE/protective conductor connection

The status of the SMC30 Sensor Module Cabinet-Mounted is indicated via a multi-color LED.

The SMC30 Sensor Module Cabinet-Mounted can be snapped onto a TH mounting rail in accordance with EN 60715 (IEC 60715).

The maximum encoder cable length between SMC30 modules and encoders is 100 m. For HTL encoders, this length can be increased to 300 m if the A+/A- and B+/B- signals are evaluated and the power supply cable has a minimum cross-section of 0.5 mm².

The signal cable shield can be connected to the SMC30 Sensor Module Cabinet-Mounted via a shield connection terminal, e.g. Phoenix Contact type SK8 or Weidmüller type KLBÜ CO 1.

Integration

The SMC30 Sensor Module Cabinet-Mounted communicates with the Advanced CUD via DRIVE-CLiQ. One SMC30 can be connected to each Advanced CUD.

Technical specifications

SMC30 Sensor Module Cabinet-Mounted	
Current consumption, max. at 24 V DC, not taking into account the encoder	0.2 A
• Conductor cross-section, max.	2.5 mm ²
• Fuse protection, max.	20 A
Power loss	< 10 W
Encoders that can be evaluated	<ul style="list-style-type: none"> • Incremental encoder TTL/HTL • SSI encoder with TTL/HTL incremental signals • SSI encoder without incremental signals
• Encoder supply	24 V DC/0.35 A or 5 V DC/0.35 A
• Encoder frequency, max.	300 kHz
• SSI baud rate	100 ... 250 kBaud
• Limiting frequency	300 kHz
• Resolution absolute position SSI	30 bits
• Cable length, max.	
- TTL encoder	100 m (only bipolar signals permitted) ¹⁾
- HTL encoder	100 m for unipolar signals 300 m for bipolar signals ¹⁾
- SSI encoder	100 m
PE connection	M4 screw
Dimensions	
• Width	30 mm
• Height	150 mm
• Depth	111 mm
Weight, approx.	0.45 kg
Approvals	cULus (File No.: E164110)

Selection and ordering data

Description	Article No.
SMC30 Sensor Module Cabinet-Mounted (without DRIVE-CLiQ cable)	6SL3055-0AA00-5CA2

Note:

The maximum permissible encoder currents should be carefully observed. The capacitive recharging currents increase in the connecting cable between the encoder and converter due to long cable lengths and high output frequencies. This can cause the output driver of the encoder to be overloaded and/or result in incorrect evaluation of the encoder signals. This is the reason that the encoder manufacturer's instructions must be carefully observed.

¹⁾ Signal cables twisted in pairs and shielded.

Selection and ordering data (continued)

DRIVE-CLiQ cables

Description	Length m	Article No.
Pre-fabricated DRIVE-CLiQ cable	0.11	6SL3060-4AB00-0AA0
	0.16	6SL3060-4AD00-0AA0
Degree of protection of connector IP20/IP20	0.21	6SL3060-4AF00-0AA0
	0.26	6SL3060-4AH00-0AA0
	0.36	6SL3060-4AM00-0AA0
	0.60	6SL3060-4AU00-0AA0
	0.95	6SL3060-4AA10-0AA0
	1.20	6SL3060-4AW00-0AA0
	1.45	6SL3060-4AF10-0AA0
	2.80	6SL3060-4AJ20-0AA0
	5.00	6SL3060-4AA50-0AA0

Overview



The number of available digital inputs and outputs within a drive system can be expanded with the TM15 Terminal Module.

TM15 Terminal Module

Design

The following are located on the TM15 Terminal Module:

- 24 bidirectional digital inputs/outputs (isolation in 3 groups with 8 channels each)
- 24 green status LEDs for indicating the logical signal status of the relevant terminal
- 2 DRIVE-CLiQ sockets
- 1 connection for the electronics power supply via the 24 V DC power supply connector
- 1 PE/protective conductor connection

The TM15 Terminal Module can be snapped onto a TH 35 mounting rail in accordance with EN 60715 (IEC 60715).

The signal cable shield can be connected to the TM15 Terminal Module via a shield connection terminal, e.g. Phoenix Contact type SK8 or Weidmüller type KLBÜ CO 1. The shield connection terminal must not be used for strain relief.

The status of the TM15 Terminal Module is indicated via a multi-color LED.

SINAMICS DCM


Accessories and supplementary components

TM15 Terminal Module

Integration

The TM15 Terminal Module communicates with the Advanced CUD via DRIVE-CLiQ. Furthermore, the TM15 is also compatible

with CU310 and CU320 Control Units or a SIMOTION D Control Unit.

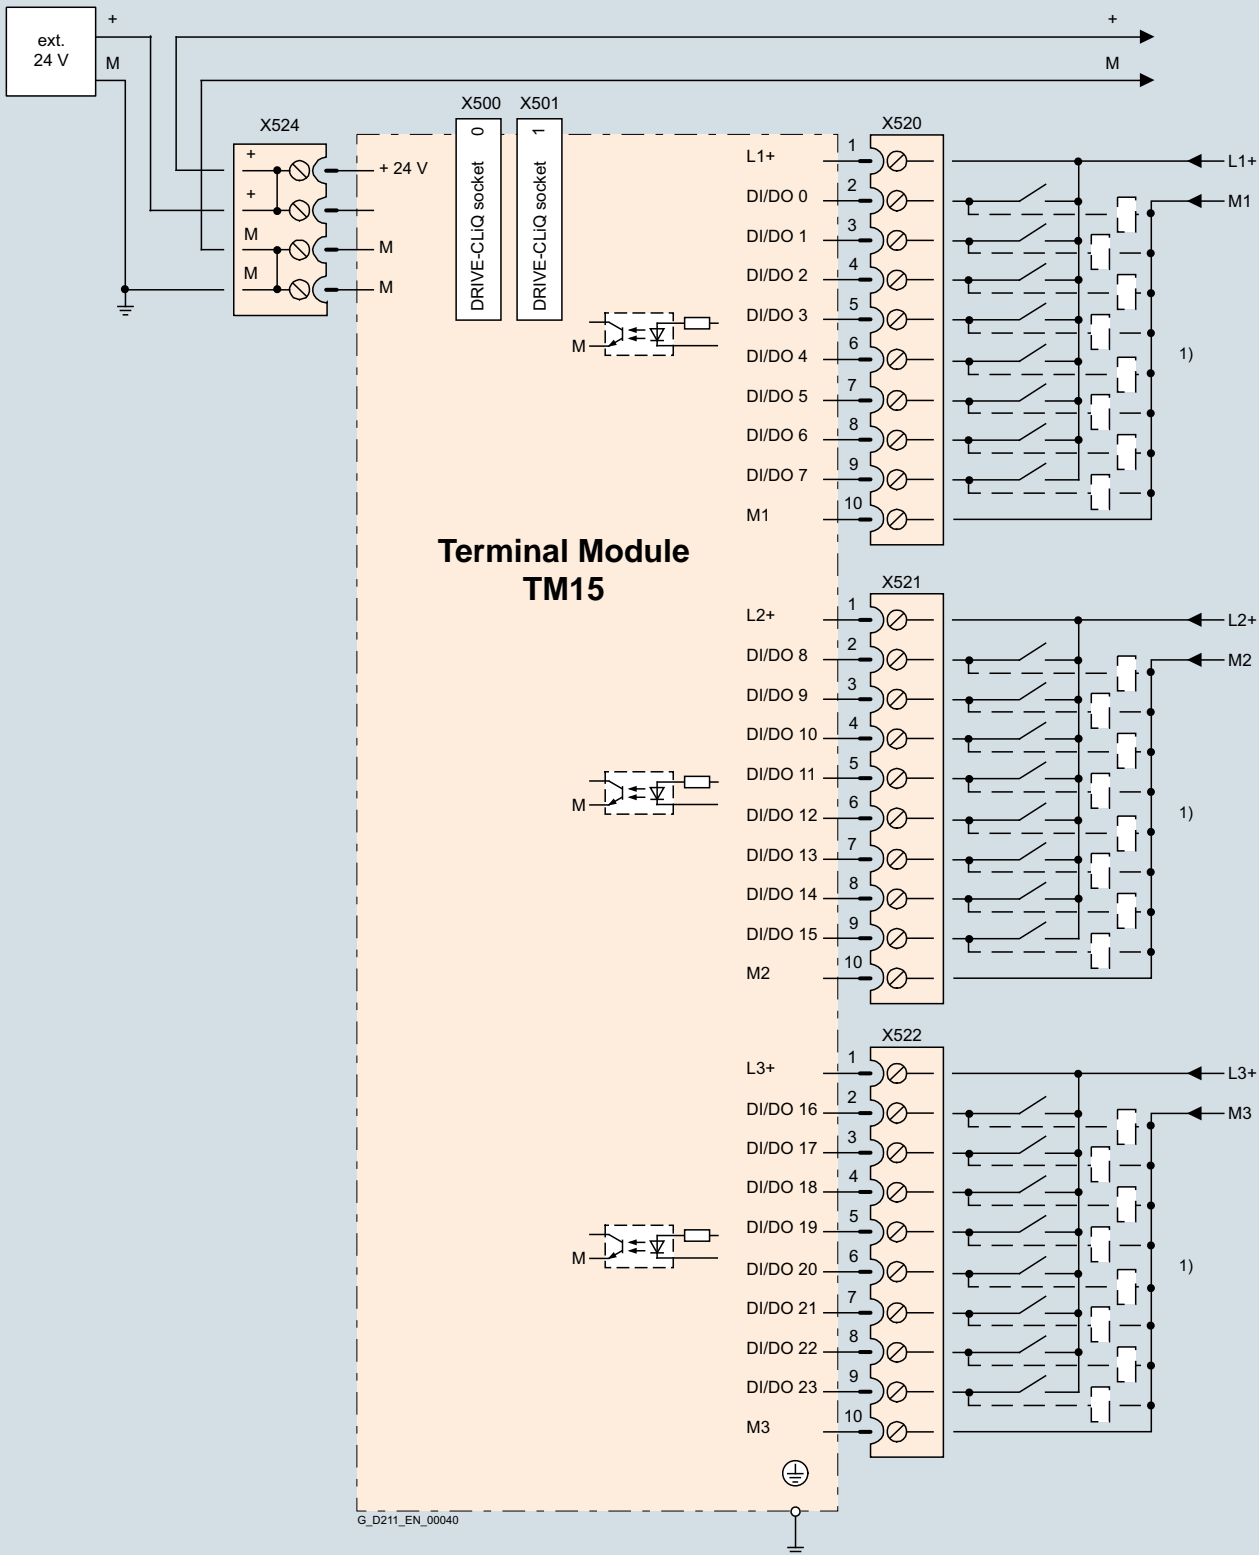

1) Can be parameterized individually as input or output.

G_D211_EN_00040

Connection example of a TM15 Terminal Module

SINAMICS DCM

Accessories and supplementary components

TM15 Terminal Module

Technical specifications

TM15 Terminal Module

Current consumption, max. at 24 V DC without load	0.15 A
• Conductor cross-section, max.	2.5 mm ²
• Fuse protection, max.	20 A
Number of DRIVE-CLiQ sockets	2
I/O	
• Digital inputs/outputs	Channelwise parameterizable as DI or DO
• Number of digital inputs/outputs	24
• Electrical isolation	Yes, in groups of 8
• Connection system	Plug-in screw-type terminals
• Conductor cross-section, max.	1.5 mm ²
Digital inputs	
• Voltage	-30 ... +30 V
• Low level (an open digital input is interpreted as "low")	-30 ... +5 V
• High level	15 ... 30 V
• Current consumption at 24 V DC	5 ... 11 mA
• Delay times of digital inputs, typ. ¹⁾	
- L → H	50 μs
- H → L	100 μs
Digital outputs (continuously short-circuit-proof)	
• Voltage	24 V DC
• Load current per digital output, max.	0.5 A
• Delay times (ohmic load) ¹⁾	
- L → H, typ.	50 μs
- L → H, max.	100 μs
- H → L, typ.	150 μs
- H → L, max.	225 μs
• Total current of outputs (per group), max.	
- Up to 60 °C	2 A
- Up to 50 °C	3 A
- Up to 40 °C	4 A
Power loss	< 3 W
PE connection	M4 screw
Dimensions	
• Width	50 mm
• Height	150 mm
• Depth	111 mm
Weight, approx.	0.86 kg
Approvals	cULus (File No.: E164110)

Selection and ordering data

TM15 Terminal Module

Description	Article No.
TM15 Terminal Module (without DRIVE-CLiQ cable)	6SL3055-0AA00-3FA0

DRIVE-CLiQ cables

Description	Length m	Article No.
Pre-fabricated DRIVE-CLiQ cable	0.11	6SL3060-4AB00-0AA0
Degree of protection of connector IP20/IP20	0.16	6SL3060-4AD00-0AA0
	0.21	6SL3060-4AF00-0AA0
	0.26	6SL3060-4AH00-0AA0
	0.36	6SL3060-4AM00-0AA0
	0.60	6SL3060-4AU00-0AA0
	0.95	6SL3060-4AA10-0AA0
	1.20	6SL3060-4AW00-0AA0
	1.45	6SL3060-4AF10-0AA0
	2.80	6SL3060-4AJ20-0AA0
	5.00	6SL3060-4AA50-0AA0

¹⁾ The specified delay times refer to the hardware. The actual reaction time depends on the time slice in which the digital input/output is processed.

SINAMICS DCM

Accessories and supplementary components

TM31 Terminal Module

Overview



The TM31 Terminal Module can be used to expand the number of available digital inputs and outputs and the number of analog inputs and outputs within a drive system.

The TM31 Terminal Module also features relay outputs with changeover contact and a temperature sensor input.

4

Design

The following are located on the TM31 Terminal Module:

- 8 digital inputs
- 4 bidirectional digital inputs/outputs
- 2 relay outputs with changeover contact
- 2 analog inputs
- 2 analog outputs
- 1 temperature sensor input (KTY84-130 or PTC)
- 2 DRIVE-CLiQ sockets
- 1 connection for the electronics power supply via the 24 V DC supply connector
- 1 PE/protective conductor connection


The TM31 Terminal Module can be snapped onto a TH 35 mounting rail in accordance with EN 60715 (IEC 60715).

The signal cable shield can be connected to the TM31 Terminal Module via a shield connection terminal, e.g. Phoenix Contact type SK8 or Weidmüller type KLBÜ CO 1. The shield connection terminal must not be used for strain relief.

The status of the TM31 Terminal Module is indicated via a multi-color LED.

Integration

The TM31 Terminal Module communicates with the Advanced CUD via DRIVE-CLiQ.

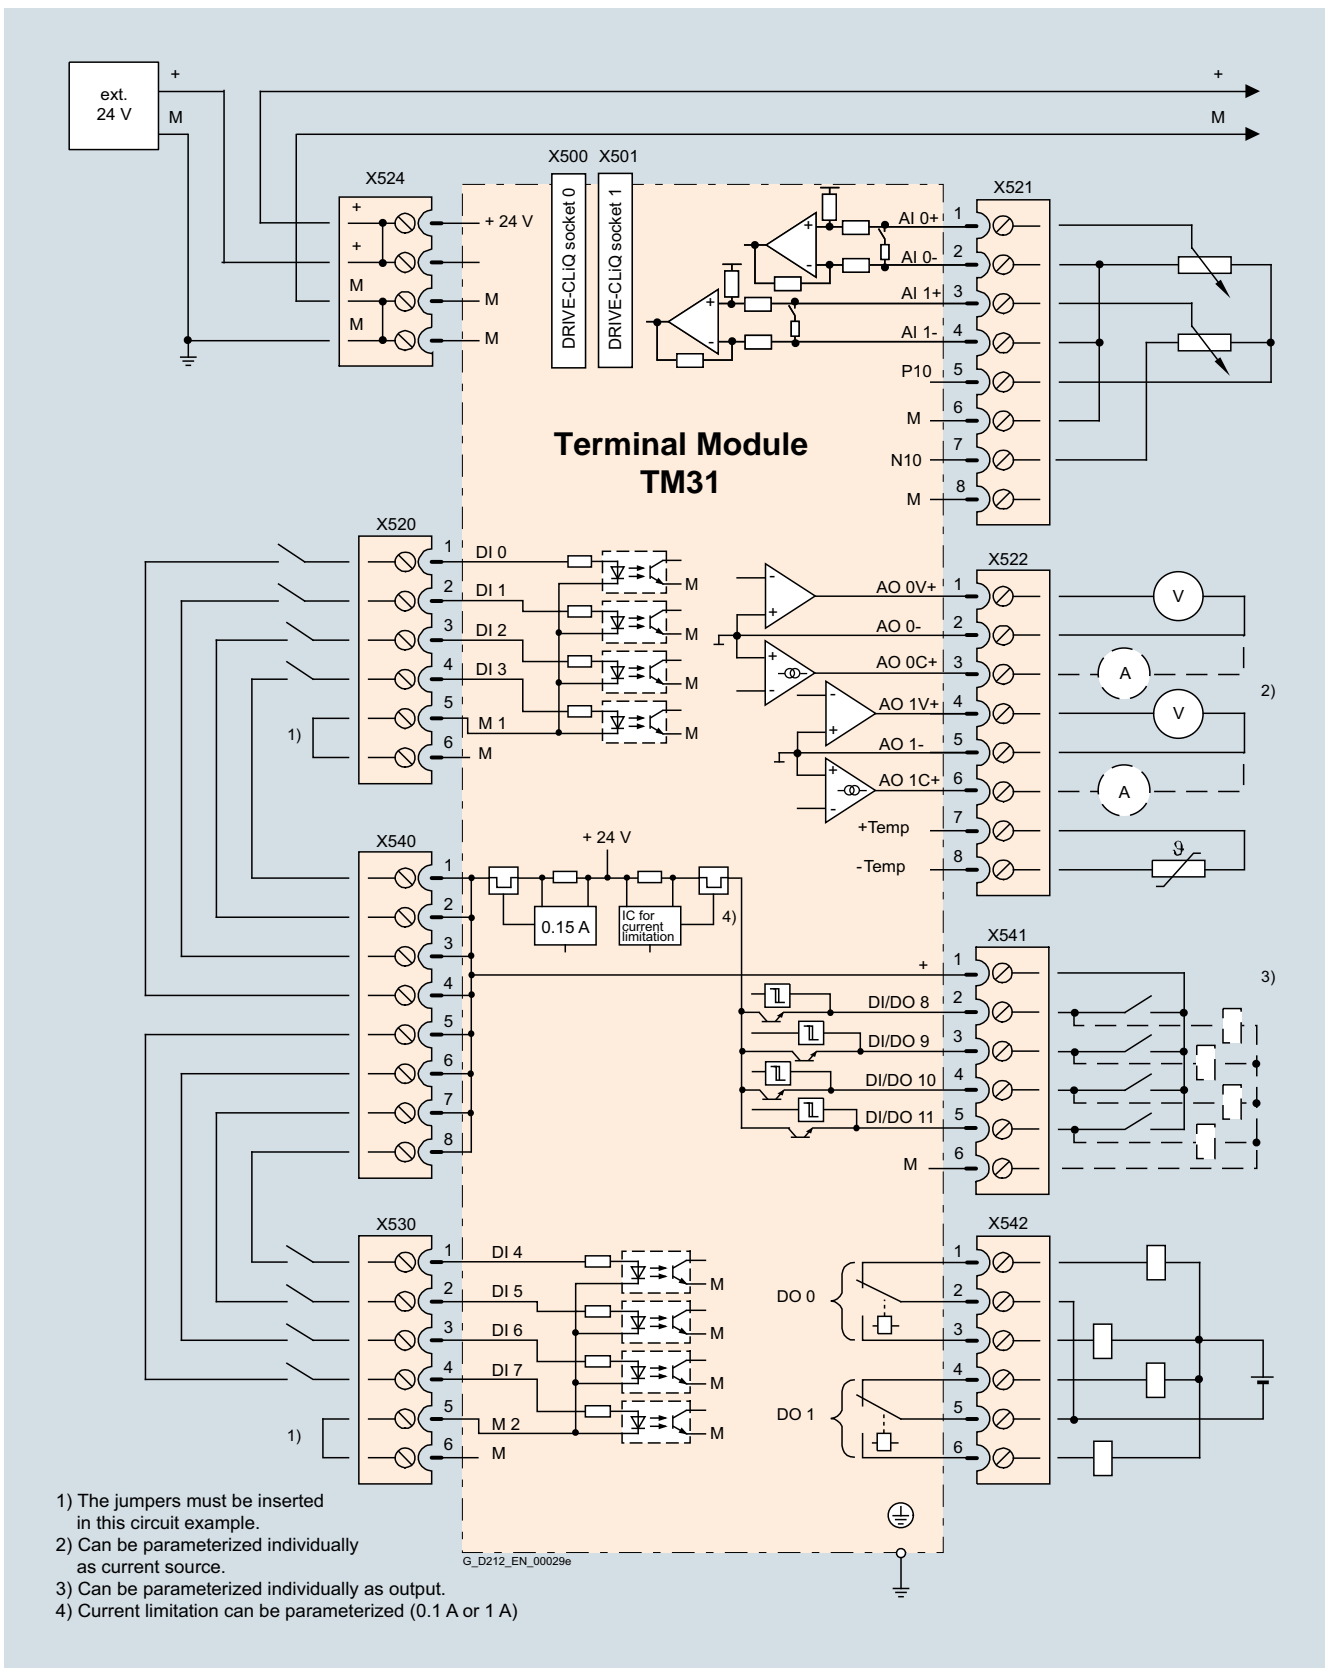

- 1) The jumpers must be inserted in this circuit example.
- 2) Can be parameterized individually as current source.
- 3) Can be parameterized individually as output.
- 4) Current limitation can be parameterized (0.1 A or 1 A)

Connection example of a TM31 Terminal Module

TM31 Terminal Module

Technical specifications

TM31 Terminal Module	
Current consumption, max. at 24 V DC without taking into account the digital outputs and DRIVE-CLiQ supply	0.2 A
• Conductor cross-section, max.	2.5 mm ²
• Fuse protection, max.	20 A
Digital inputs	
• Voltage	-3 ... +30 V
• Low level (an open digital input is interpreted as "low")	-3 ... +5 V
• High level	15 ... 30 V
• Current consumption at 24 V DC, typ.	10 mA
• Delay times of digital inputs ¹⁾ , approx.	
- L → H	50 μs
- H → L	100 μs
• Conductor cross-section, max.	1.5 mm ²
Digital outputs (continuously short-circuit-proof)	
• Voltage	24 V DC
• Total current of digital outputs, max.	1000 mA
• Delay times of digital outputs ¹⁾	
- typ.	150 μs at 0.5 A resistive load
- max.	500 μs
• Conductor cross-section, max.	1.5 mm ²
Analog inputs	
• As voltage input	
- Voltage range	-10 ... +10 V
- Internal resistance R_i	100 kΩ
• As current input	
- Current range	4 ... 20 mA, -20 ... +20 mA, 0 ... 20 mA
- Internal resistance R_i	250 Ω
- Resolution ²⁾	11 bits + sign
• Conductor cross-section, max.	1.5 mm ²

TM31 Terminal Module	
Analog outputs (continuously short-circuit-proof)	
• Voltage range	-10 ... +10 V
• Load current, max.	-3 ... +3 mA
• Current range	4 ... 20 mA, -20 ... +20 mA, 0 ... 20 mA
• Load resistance, max.	500 Ω for outputs in the range -20 ... +20 mA
• Resolution	11 bits + sign
• Conductor cross-section, max.	1.5 mm ²
Relay outputs (changeover contacts)	
• Load current, max.	8 A
• Switching voltage, max.	250 V AC, 30 V DC
• Switching capacity, max.	
- At 250 V AC	2000 VA (cos φ = 1) 750 VA (cos φ = 0.4)
- At 30 V DC	240 W (resistive load)
• Required minimum current	100 mA
• Conductor cross-section, max.	2.5 mm ²
Power loss	< 10 W
PE connection	M4 screw
Dimensions	
• Width	50 mm
• Height	150 mm
• Depth	111 mm
Weight, approx.	0.87 kg
Approvals	cULus (File No.: 164110)

Selection and ordering data

Description	Article No.
TM31 Terminal Module (without DRIVE-CLiQ cable)	6SL3055-0AA00-3AA1

DRIVE-CLiQ cables

Description	Length m	Article No.
Pre-fabricated DRIVE-CLiQ cable	0.11	6SL3060-4AB00-0AA0
	0.16	6SL3060-4AD00-0AA0
Degree of protection of connector IP20/IP20	0.21	6SL3060-4AF00-0AA0
	0.26	6SL3060-4AH00-0AA0
	0.36	6SL3060-4AM00-0AA0
	0.60	6SL3060-4AU00-0AA0
	0.95	6SL3060-4AA10-0AA0
	1.20	6SL3060-4AW00-0AA0
	1.45	6SL3060-4AF10-0AA0
	2.80	6SL3060-4AJ20-0AA0
	5.00	6SL3060-4AA50-0AA0

¹⁾ The specified delay times refer to the hardware. The actual reaction time depends on the time slice in which the digital input is processed.

²⁾ If the analog input is to be operated in the signal processing sense with a continuously variable input voltage, the sampling frequency $f_a = 1/t_{\text{time slice}}$ must be at least twice the value of the highest signal frequency f_{max} .

SINAMICS DCM

Accessories and supplementary components

TM150 Terminal Module

Overview



The TM150 Terminal Module is a DRIVE-CLiQ component for temperature evaluation. The temperature is measured in a temperature range from -99 °C to +250 °C for the following temperature sensors:

- Pt100 (with monitoring for open-circuit and short-circuit)
- Pt1000 (with monitoring for open-circuit and short-circuit)
- KTY84 (with monitoring for open-circuit and short-circuit)
- PTC (with short-circuit monitoring)
- Bimetallic NC contact (without monitoring)

For the temperature sensor inputs, for each terminal block the evaluation can be parameterized for 1×2-wire, 2×2-wire, 3-wire or 4-wire. There is no electrical isolation in the TM150.

The temperature channels of a TM150 can be subdivided into 3 groups and evaluated together.

Design

The following are located on the TM150 Terminal Module:

- 6/12 temperature sensor inputs
- 2 DRIVE-CLiQ sockets

The status of the TM150 Terminal Module is indicated via a multi-color LED.

The TM150 Terminal Module is designed to be snapped onto a TH35 mounting rail in accordance with EN 60715.

Technical specifications

TM150 Terminal Module 6SL3055-0AA00-3LA0

Current consumption, max. at 24 V DC	0.5 A
• Conductor cross-section, max.	2.5 mm ²
• Fuse protection, max.	20 A
Temperature sensor inputs The inputs can be parameterized individually for the evaluation of sensors	
• Conductor cross-section, max.	1.5 mm ²
• Measuring current per sensor, approx.	0.8 mA
PE connection	M4 screw
Dimensions	
• Width	30 mm
• Height	150 mm
• Depth	119 mm
Weight, approx.	0.41 kg

Selection and ordering data


Description	Article No.
TM150 Terminal Module Without DRIVE-CLiQ cable	6SL3055-0AA00-3LA0
Accessories	
SINAMICS/SINUMERIK/SIMOTION dust-proof blanking plugs (50 units) For DRIVE-CLiQ port	6SL3066-4CA00-0AA0

SINAMICS DCM

Accessories and supplementary components

TM150 Terminal Module

Integration

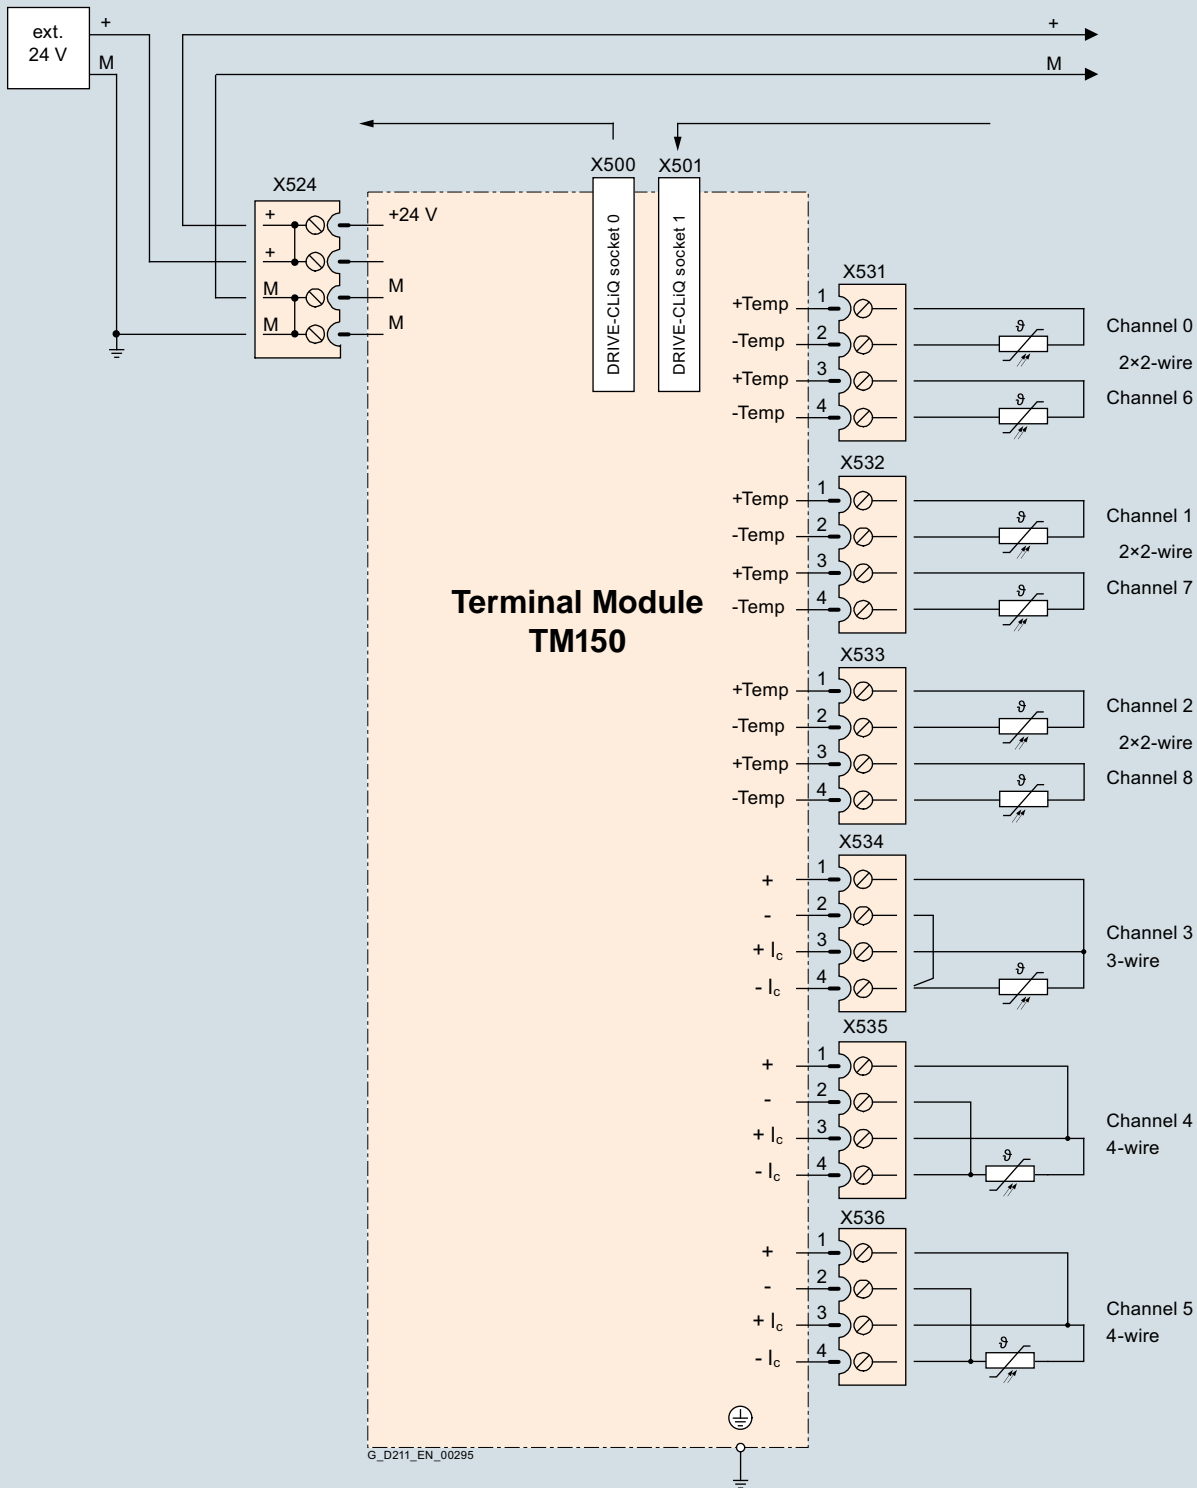

Connection example of a TM150 Terminal Module

4

Overview

With a mounting kit, it is possible to increase the degree of protection of SINAMICS DC MASTER from IP00 up to IP20.

Selection and ordering data

For units up to 850 A, there is a suitable mounting kit to increase the degree of protection; this can be ordered using the following article numbers.

Mounting kit to upgrade to IP20

Description	Article No.
for units from 15 to 30 A	6RX1800-0MA00
for units from 60 to 280 A	6RX1800-0MA01
for units from 400 to 600 A	6RX1800-0MA02
for units from 720 to 850 A	6RX1800-0MA03

Note:

Detailed information about increasing the degree of protection can be found on the Internet at <http://support.automation.siemens.com/WW/view/en/80633087>.

SINAMICS DCM

Accessories and supplementary components

Line fuses

Overview

3NE1 SITOR double protection fuses allow the cable and semiconductor protection to be implemented with just one fuse.

This results in significant cost savings and shorter assembly times.

An overview of the fuses required for the armature and field circuits is provided in the following table.

Fuse	Armature circuit				Field circuit
	< 900 A		≥ 900 A		
	Two-quadrant operation	Four-quadrant operation	Two-quadrant operation	Four-quadrant operation	
Phase fuse	Required	Required	–	–	Required
Arm fuse	–	–	Integrated in the unit	Integrated in the unit	–
DC fuse	–	Required	–	–	–

Selection and ordering data


For technical specifications, engineering data as well as dimensional drawings for Siemens fuses, please refer to Catalog LV 10.1

"Low-Voltage Power Distribution and Electrical Installation Technology".

In order to ensure UL-compliant protection of units, it is essential that you use UL-listed or UL-recognized fuses.

Fuses for the field circuit


Recommended fuses for the field circuit

Rated DC current for converter unit	Max. field current	2 Siemens fuses		2 Busmann fuses FWP 700V 	
		Article No. per unit	A	Article No. per unit	A
A	A				
15	3	5SD420	16	FWP-5B	5
30	5	5SD420	16	FWP-5B	5
60 ... 125	10	5SD420	16	FWP-15B	15
210 ... 280	15	5SD440	25	FWP-20B	20
400 ... 600	25	5SD440	25	FWP-30B	30
710 ... 850	30	5SD480	30	FWP-35B	35
900 ... 3000	40	3NE1802-0 ¹⁾	40	FWP-50B	50
1500 ... 3000 with option L85	85	3NE8021-1 ¹⁾	100	FWP-100B	100

Fuses for the armature circuit

Units, two-quadrant operation: 400 V, 575 V, 690 V, 830 V and 950 V

Phase fuses

Unit Type	3 phase fuses Siemens 			
	//V A/V	Article No. per unit	//V A/V	
6RA8025-6DS22-0AA0	60/400	3NE1817-0	50/690	
6RA8025-6GS22-0AA0	60/575	3NE1817-0	50/690	
6RA8028-6DS22-0AA0	90/400	3NE1820-0	80/690	
6RA8031-6DS22-0AA0	125/400	3NE1021-0	100/690	
6RA8031-6GS22-0AA0	125/575	3NE1021-0	100/690	
6RA8075-6DS22-0AA0	210/400	3NE3227	250/1000	
6RA8075-6GS22-0AA0	210/575	3NE3227	250/1000	
6RA8078-6DS22-0AA0	280/400	3NE3231	350/1000	
6RA8081-6DS22-0AA0	400/400	3NE3233	450/1000	
6RA8081-6GS22-0AA0	400/575	3NE3233	450/1000	
6RA8085-6DS22-0AA0	600/400	3NE3336	630/1000	
6RA8085-6GS22-0AA0	600/575	3NE3336	630/1000	
6RA8087-6DS22-0AA0	850/400	3NE3338-8	800/800	
6RA8087-6GS22-0AA0	800/575	3NE3338-8	800/800	
6RA8086-6KS22-0AA0	720/690	3NE3337-8	710/900	


¹⁾ UL-recognized

Selection and ordering data (continued)

Arm fuses




Note:

The arm fuses are included in the unit. No external semiconductor fuses are required.

Unit		Arm fuses Siemens 		
Type	//V A/V	Fuses	Article No. per unit	//V A/V
6RA8091-6DS22-0AA0	1200/400	6	3NE3338-8	800/800
6RA8090-6GS22-0AA0	1100/575	6	3NE3338-8	800/800
6RA8090-6KS22-0AA0	1000/690	6	3NE3337-8	710/900
6RA8088-6LS22-0AA0	950/830	6	3NE3337-8	710/900
6RA8093-4DS22-0AA0	1600/400	6	6RY1702-0BA02	1000/660
6RA8093-4GS22-0AA0	1600/575	6	6RY1702-0BA02	1000/660
6RA8093-4KS22-0AA0	1500/690	6	6RY1702-0BA03	1000/1000
6RA8093-4LS22-0AA0	1500/830	6	6RY1702-0BA03	1000/1000
6RA8095-4DS22-0AA0	2000/400	6	6RY1702-0BA01	1250/660
6RA8095-4GS22-0AA0	2000/575	6	6RY1702-0BA01	1250/660
6RA8095-4KS22-0AA0	2000/690	12	6RY1702-0BA04	630/1000
6RA8095-4LS22-0AA0	1900/830	12	6RY1702-0BA04	630/1000
6RA8096-4GS22-0AA0	2200/575	6	6RY1702-0BA05	1500/660
6RA8096-4MS22-0AA0	2200/950	12	3NC3438-6	800/1100
6RA8097-4KS22-0AA0	2600/690	12	3NC3341-6	1000/1000
6RA8097-4GS22-0AA0	2800/575	12	3NC3341-6	1000/1000
6RA8098-4DS22-0AA0	3000/400	12	3NC3341-6	1000/1000

Units, two-quadrant operation: 480 V


Phase fuses

Unit		3 phase fuses Siemens 		3 phase fuses Bussmann 		3 phase fuses Bussmann  ¹⁾	
Type	//V A/V	Article No. per unit	//V A/V	Article No. per unit	//V A/V	Article No. per unit	//V A/V
6RA8025-6FS22-0AA0	60/480	3NE1817-0	50/690	170M1565	63/660	FWH-60B	60/500
6RA8028-6FS22-0AA0	90/480	3NE1820-0	80/690	170M1567	100/660	FWH-100B	100/500
6RA8031-6FS22-0AA0	125/480	3NE1021-0	100/690	170M1568	125/660	FWH-125B	125/500
6RA8075-6FS22-0AA0	210/480	3NE3227	250/1000	170M3166	250/660	FWH-225A	225/500
6RA8078-6FS22-0AA0	280/480	3NE3231	350/1000	170M3167	315/660	FWH-275A	275/500
6RA8082-6FS22-0AA0	450/480	3NE3233	450/1000	170M3170	450/660	FWH-450A	450/500
6RA8085-6FS22-0AA0	600/480	3NE3336	630/1000	170M4167	700/660	FWH-600A	600/500
6RA8087-6FS22-0AA0	850/480	3NE3338-8	800/800	170M5165	900/660	FWH-800A	800/500

Arm fuses

Note:

The arm fuses are included in the unit. No external semiconductor fuses are required.

Unit		Arm fuses Siemens 		
Type	//V A/V	Fuses	Article No. per unit	//V A/V
6RA8091-6FS22-0AA0	1200/480	6	3NE3338-8	800/800

¹⁾ FWH... fuses are not mechanically compatible with 3NE or 170M fuses.

SINAMICS DCM



Accessories and supplementary components

Line fuses

Selection and ordering data (continued)

Units, four-quadrant operation: 400 V, 575 V, 690 V, 830 V and 950 V


Phase fuses, DC fuse

Unit Type	//V A/V	3 phase fuses Siemens 		1 DC fuse Siemens 	
		Article No. per unit	//V A/V	Article No. per unit	//V A/V
6RA8013-6DV62-0AA0	15/400	3NE1814-0	20/690	3NE1814-0	20/690
6RA8018-6DV62-0AA0	30/400	3NE8003-1	35/690	3NE4102	40/1000
6RA8025-6DV62-0AA0	60/400	3NE1817-0	50/690	3NE4120	80/1000
6RA8025-6GV62-0AA0	60/575	3NE1817-0	50/690	3NE4120	80/1000
6RA8028-6DV62-0AA0	90/400	3NE1820-0	80/690	3NE4122	125/1000
6RA8031-6DV62-0AA0	125/400	3NE1021-0	100/690	3NE4124	160/1000
6RA8031-6GV62-0AA0	125/575	3NE1021-0	100/690	3NE4124	160/1000
6RA8075-6DV62-0AA0	210/400	3NE3227	250/1000	3NE3227	250/1000
6RA8075-6GV62-0AA0	210/575	3NE3227	250/1000	3NE3227	250/1000
6RA8078-6DV62-0AA0	280/400	3NE3231	350/1000	3NE3231	350/1000
6RA8081-6DV62-0AA0	400/400	3NE3233	450/1000	3NE3233	450/1000
6RA8081-6GV62-0AA0	400/575	3NE3233	450/1000	3NE3233	450/1000
6RA8085-6DV62-0AA0	600/400	3NE3336	630/1000	3NE3336	630/1000
6RA8085-6GV62-0AA0	600/575	3NE3336	630/1000	3NE3336	630/1000
6RA8087-6DV62-0AA0	850/400	3NE3338-8	800/800	3NE3334-0B ¹⁾	500/1000
6RA8087-6GV62-0AA0	850/575	3NE3338-8	800/800	3NE3334-0B ¹⁾	500/1000
6RA8086-6KV62-0AA0	760/690	3NE3337-8	710/900	3NE3334-0B ¹⁾	500/1000

Arm fuses

Note:

The arm fuses are included in the unit. No external semiconductor fuses are required.




Unit Type	//V A/V	Arm fuses Siemens 		
		Fuses	Article No. per unit	//V A/V
6RA8091-6DV62-0AA0	1200/400	6	3NE3338-8	800/800
6RA8090-6GV62-0AA0	1100/575	6	3NE3338-8	800/800
6RA8090-6KV62-0AA0	1000/690	6	3NE3337-8	710/900
6RA8088-6LV62-0AA0	950/830	6	3NE3337-8	710/900
6RA8093-4DV62-0AA0	1600/400	6	6RY1702-0BA02	1000/660
6RA8093-4GV62-0AA0	1600/575	6	6RY1702-0BA02	1000/660
6RA8093-4KV62-0AA0	1500/690	6	6RY1702-0BA03	1000/1000
6RA8093-4LV62-0AA0	1500/830	6	6RY1702-0BA03	1000/1000
6RA8095-4DV62-0AA0	2000/400	6	6RY1702-0BA01	1250/660
6RA8095-4GV62-0AA0	2000/575	6	6RY1702-0BA01	1250/660
6RA8095-4KV62-0AA0	2000/690	12	6RY1702-0BA04	630/1000
6RA8095-4LV62-0AA0	1900/830	12	6RY1702-0BA04	630/1000
6RA8096-4GV62-0AA0	2200/575	6	6RY1702-0BA05	1500/660
6RA8096-4MV62-0AA0	2200/950	12	3NC3438-6	800/1100
6RA8097-4KV62-0AA0	2600/690	12	3NC3341-6	1000/1000
6RA8097-4GV62-0AA0	2800/575	12	3NC3341-6	1000/1000
6RA8098-4DV62-0AA0	3000/400	12	3NC3341-6	1000/1000

¹⁾ Two fuses connected in parallel.



Selection and ordering data (continued)

Units, four-quadrant operation: 480 V

Phase fuses

Unit		3 phase fuses Siemens 		3 phase fuses Bussmann 		3 phase fuses Bussmann  ²⁾	
Type	//V A/V	Article No. per unit	//V A/V	Article No. per unit	//V A/V	Article No. per unit	//V A/V
6RA8013-6FV62-0AA0	15/480	3NE1814-0	20/690	170M1562	32/660	FWH-35B	35/500
6RA8018-6FV62-0AA0	30/480	3NE1815-0	25/690	170M1562	32/660	FWH-35B	35/500
6RA8025-6FV62-0AA0	60/480	3NE1817-0	50/690	170M1565	63/660	FWH-60B	60/500
6RA8028-6FV62-0AA0	90/480	3NE1820-0	80/690	170M1567	100/660	FWH-100B	100/500
6RA8031-6FV62-0AA0	125/480	3NE1021-0	100/690	170M1568	125/660	FWH-125B	125/500
6RA8075-6FV62-0AA0	210/480	3NE3227	250/1000	170M3166	250/660	FWH-225A	225/500
6RA8078-6FV62-0AA0	280/480	3NE3231	350/1000	170M3167	315/660	FWH-275A	275/500
6RA8082-6FV62-0AA0	450/480	3NE3233	450/1000	170M3170	450/660	FWH-450A	450/500
6RA8085-6FV62-0AA0	600/480	3NE3336	630/1000	170M4167	700/660	FWH-600A	600/500
6RA8087-6FV62-0AA0	850/480	3NE3338-8	800/800	170M5165	900/660	FWH-800A	800/500


DC fuse

Type	//V A/V	1 DC fuse Siemens 		1 DC fuse Bussmann  ²⁾	
Type	//V A/V	Article No. per unit	//V A/V	Article No. per unit	//V A/V
6RA8013-6FV62-0AA0	15/480	3NE1814-0	20/690	FWP-35B	35/660
6RA8018-6FV62-0AA0	30/480	3NE4102	40/1000	FWP-35B	35/660
6RA8025-6FV62-0AA0	60/480	3NE4120	80/1000	FWP-70B	70/660
6RA8028-6FV62-0AA0	90/480	3NE4122	125/1000	FWP-125A	125/660
6RA8031-6FV62-0AA0	125/480	3NE4124	160/1000	FWP-150A	150/660
6RA8075-6FV62-0AA0	210/480	3NE3227	250/1000	FWP-250A	250/660
6RA8078-6FV62-0AA0	280/480	3NE3231	350/1000	FWP-350A	350/660
6RA8082-6FV62-0AA0	450/480	3NE3334-0B	500/1000	FWP-500A	500/660
6RA8085-6FV62-0AA0	600/480	3NE3336	630/1000	FWP-700A	700/660
6RA8087-6FV62-0AA0	850/480	3NE3334-0B ¹⁾	500/1000	FWP-1000A	1000/660

Arm fuses

Note:

The arm fuses are included in the unit. No external semiconductor fuses are required.

Unit		Arm fuses Siemens 		
Type	//V A/V	Fuses	Article No. per unit	//V A/V
6RA8091-6FV62-0AA0	1200/480	6	3NE3338-8	800/800

¹⁾ Two fuses connected in parallel.

²⁾ FWH-... and FWP-... fuses are not mechanically compatible with 3NE or 170M fuses.

Overview

Commutating reactors

A converter must always be connected to the line supply through a commutation inductance. This must have at least 4 % u_K ! The commutation inductance can be in the form of a converter transformer or, for the appropriate line supply, in the form of a commutating reactor.

A line supply can be considered to be "stiff" if the power ratio $P_s/S_k \leq 0.01$. Even for stiff line supplies, the commutation inductance must have a u_K of at least 4 %!

For high-rating converters, the line reactance, i.e. the finite fault level (short-circuit power) of the line supply must be taken into account; this also results in higher u_K values. Recommendation


for the ratio of the line supply fault level (short-circuit power) to the apparent drive power $> 33:1$.

The commutating reactors are dimensioned according to the rated motor current in the armature or field circuit.

Operation with line frequencies of 50 Hz and 60 Hz

The rated currents I_{Ln} of the reactors, specified in the table, apply for operation with a line frequency $f = 50$ Hz. It is permissible to operate the reactors with a line frequency $f = 60$ Hz. In this case, the next-higher voltage level must be selected (e.g. 480 V instead of 400 V).

At the same time, the voltage drop ΔV increases by 8 %.

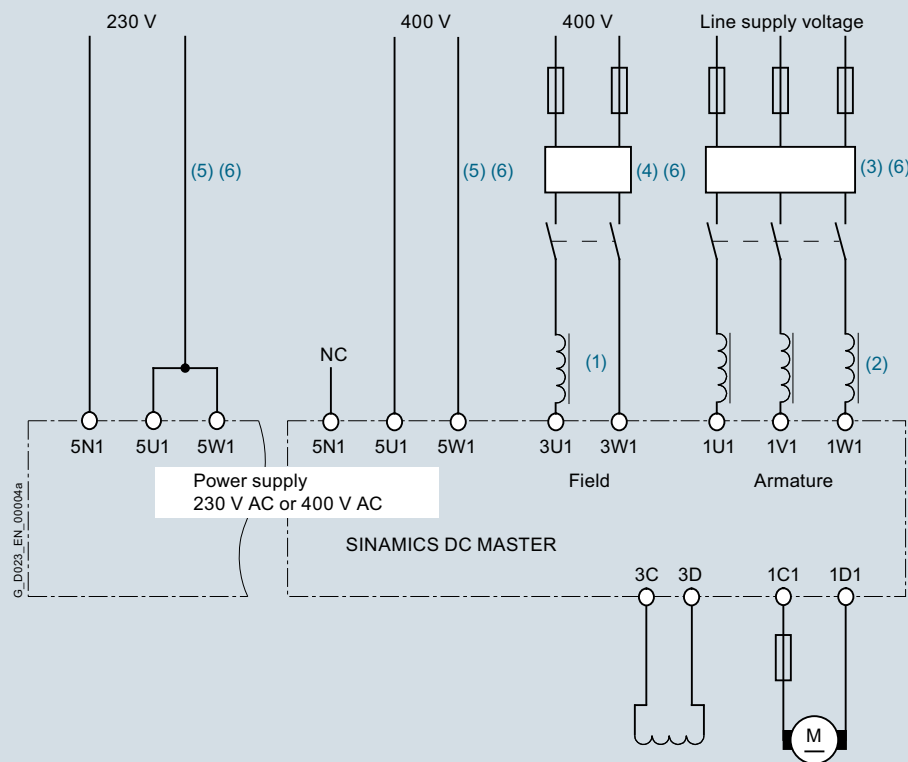

Arrangement of reactors and radio interference suppression filters

- (1) The commutating reactor in the field circuit is dimensioned for the rated motor field current.
- (2) The commutating reactor in the armature circuit is dimensioned for the rated motor armature current.
The line current is 0.82 times the DC current.
- (3) The radio interference suppression filter for the armature circuit is dimensioned for the rated motor armature current.
The line current is 0.82 times the DC current.
- (4) The radio interference suppression filter for the field circuit is dimensioned for the rated motor field current.
- (5) The electronics power supply itself does not require a radio interference suppression filter. Current consumption 1 A at 400 V, 2 A at 230 V.
- (6) If the power supply voltages for the armature circuit, field circuit and electronics power supply are the same, then the voltage for the field and electronics power supply can also be taken after the radio interference suppression filter for the armature circuit.

SINAMICS DCM

Accessories and supplementary components

Commutating reactors

Selection and ordering data



Note:

The commutating reactors are dimensioned according to the rated motor current in the armature and field circuits. When the unit is connected to a single phase, single-phase commutating reactors must also be used in the armature circuit. These are available on request.

The tables below list the commutating reactors which are available as standard.

Additional information can be found in the Operating Instructions "SINAMICS DCM Commutation reactors" (see <http://support.automation.siemens.com/WW/view/en/85062393>).

General technical specifications	
Degree of protection	IP00
Protection class	Class 1 ²⁾
Cooling	AN, self-ventilated
Inductance tolerance	± 10 %
Environmental classes according to DIN IEC 60721-3, Parts 1 to 3	<ul style="list-style-type: none"> • Climatic: <ul style="list-style-type: none"> - Storage: 1K3 - Transport: 2K2 - Operation: 3K3 • Mechanical: 3M3
Ambient temperature during operation	
• 1-phase reactors	0 to +45 °C, above with derating
• 3-phase reactors	0 to +40 °C, above with derating
Ambient temperature for storage and transport	-40 to +70 °C
Installation altitude (at rated current)	≤ 1000 m above sea level, above with derating
Operation at 50 Hz and 60 Hz with rated current is permissible	

Three-phase commutating reactors, $u_k = 4\%$							
AC rated current	Inductance	Copper losses	Total losses	Short-circuit current rating (SCCR)	Weight	Rated insulation voltage	Article No.
A	mH	W	W	kA	kg	V	
Rated voltage 400 V							
13	2.315	22.8	33.1	2.0 (20 ms)	2.9	600	6RX1800-4DK00
25	1.158	30.8	53.2	5.0 (20 ms)	4.4	600	6RX1800-4DK01
51	0.579	43.5	73.2	6.5 (100 ms)	10.9	600	6RX1800-4DK02
76	0.386	64.4	118.5	9.0 (100 ms)	13.8	600	6RX1800-4DK03
106	0.278	51.3	119.3	15 (100 ms)	23.9	600	6RX1800-4DK04
174	0.169	164.8	206.4	15 (100 ms)	24.0	600	6RX1800-4DK05
232	0.127	197.4	256.2	20 (100 ms)	26.8	600	6RX1800-4DK06
332	0.089	190.7	251.1	24 (200 ms)	45.8	600	6RX1800-4DK07
374	0.079	186.7	251.7	24 (200 ms)	56.8	600	6RX1800-4DK08
498	0.059	277.0	357.4	35 (200 ms)	60.0	600	6RX1800-4DK10
706	0.042	329.4	424.8	55 (200 ms)	81.6	1000	6RX1800-4DK11
996	0.030	390.3	562.8	75 (200 ms)	100.1	1000	6RX1800-4DK12
1328	0.022	339.3	554.5	75 (200 ms)	138.8	1000	6RX1800-4DK13
1660	0.018	369.3	591.9	75 (200 ms)	210.7	1000	6RX1800-4DK14
2490	0.012	587.3	1038.3	75 (200 ms)	205.6	1000	6RX1800-4DK15

Note:

Commutating reactors with $u_k = 2\%$ are available on request. A limited tolerance range is also possible for parallel connections.

¹⁾ All commutating reactors with rated voltages $V_N \leq 600$ V to UL

²⁾ Note about protection class 1: Despite protective conductor connection, no 'touchable conductive parts' with regard to the standard (e.g. EN 61800-5-1) are defined. In this case, the protective conductor ensures that no dangerous voltages/currents can act at the mounting surfaces. The complete reactor must be considered as being an active component.

SINAMICS DCM

Accessories and supplementary components

Commutating reactors

Selection and ordering data (continued)



Three-phase commutating reactors, $u_K = 4\%$

AC rated current	Inductance	Copper losses	Total losses	Short-circuit current rating (SCCR)	Weight	Rated insulation voltage	Article No.
A	mH	W	W	kA	kg	V	
Rated voltage 480 V							
13	2.779	27.4	39.2	2.0 (20 ms)	2.9	600	6RX1800-4FK00
25	1.389	34.8	57.8	5.0 (20 ms)	6.0	600	6RX1800-4FK01
51	0.695	42.3	77.2	6.5 (100 ms)	11.8	600	6RX1800-4FK02
76	0.463	56.3	118.0	9.0 (100 ms)	16.3	600	6RX1800-4FK03
106	0.333	68.8	152.9	15 (100 ms)	22.3	600	6RX1800-4FK04
174	0.202	204.6	255.6	15 (100 ms)	26.0	600	6RX1800-4FK05
232	0.152	178.3	231.5	20 (100 ms)	37.8	600	6RX1800-4FK06
332	0.106	193.7	261.5	24 (100 ms)	56.1	600	6RX1800-4FK07
374	0.094	189.1	279.2	24 (100 ms)	56.8	600	6RX1800-4FK08
498	0.071	313.8	396.9	35 (200 ms)	78.1	1000	6RX1800-4FK10
664	0.053	255.6	360.8	75 (200 ms)	96.6	1000	6RX1800-4FK11
706	0.050	293.9	404.1	75 (200 ms)	96.6	1000	6RX1800-4FK12
913	0.039	375.6	558.6	75 (200 ms)	114.5	1000	6RX1800-4FK13
996	0.035	332.7	532.8	75 (200 ms)	127.8	1000	6RX1800-4FK14
1328	0.027	320.4	573.7	75 (200 ms)	177.6	1000	6RX1800-4FK15
1660	0.021	436.5	819.0	75 (200 ms)	161.0	1000	6RX1800-4FK16
1826	0.019	464.7	819.9	75 (200 ms)	164.2	1000	6RX1800-4FK17
2324	0.015	671.8	1056.7	75 (200 ms)	258.2	1000	6RX1800-4FK18
Rated voltage 575 V							
51	0.832	56.8	109.7	6.5 (100 ms)	13.6	600	6RX1800-4GK00
106	0.399	65.5	156.7	15 (100 ms)	26.4	600	6RX1800-4GK01
174	0.243	150.0	200.5	15 (100 ms)	34.5	600	6RX1800-4GK02
332	0.127	252.1	327.3	24 (200 ms)	63.1	600	6RX1800-4GK03
498	0.085	330.3	427.5	35 (200 ms)	86.0	1000	6RX1800-4GK04
598	0.071	339.6	455.5	55 (200 ms)	89.8	1000	6RX1800-4GK05
631	0.067	322.8	441.1	55 (200 ms)	95.7	1000	6RX1800-4GK06
664	0.064	380.7	547.2	75 (200 ms)	108.4	1000	6RX1800-4GK07
706	0.060	392.7	564.5	75 (200 ms)	120.6	1000	6RX1800-4GK08
830	0.051	308.1	498.3	75 (200 ms)	134.8	1000	6RX1800-4GK10
913	0.046	320.7	515.9	75 (200 ms)	143.9	1000	6RX1800-4GK11
1245	0.034	371.4	605.4	75 (200 ms)	206.1	1000	6RX1800-4GK12
1328	0.032	503.1	812.4	75 (200 ms)	160.9	1000	6RX1800-4GK13
1660	0.025	631.3	993.1	75 (200 ms)	202.0	1000	6RX1800-4GK14
1826	0.023	614.7	1006.9	75 (200 ms)	212.1	1000	6RX1800-4GK15
2158	0.020	534.6	1073.7	75 (200 ms)	303.0	1000	6RX1800-4GK16
2324	0.018	556.2	1110.0	75 (200 ms)	321.6	1000	6RX1800-4GK17

Note:

Commutating reactors with $u_K = 2\%$ are available on request. A limited tolerance range is also possible for parallel connections.

¹⁾ All commutating reactors with rated voltages $V_N \leq 600$ V to UL

SINAMICS DCM

Accessories and supplementary components

Commutating reactors

Selection and ordering data (continued)



Three-phase commutating reactors, $u_K = 4\%$

AC rated current	Inductance	Copper losses	Total losses	Short-circuit current rating (SCCR)	Weight	Rated insulation voltage	Article No.
A	mH	W	W	kA	kg	V	
Rated voltage 690 V							
598	0.085	388.2	562.1	55 (200 ms)	108.9	1000	6RX1800-4KK00
631	0.080	402.0	586.4	75 (200 ms)	113.3	1000	6RX1800-4KK01
789	0.064	362.7	564.6	75 (200 ms)	141.9	1000	6RX1800-4KK02
830	0.061	350.7	561.4	75 (200 ms)	153.4	1000	6RX1800-4KK03
1245	0.041	505.2	845.7	75 (200 ms)	169.7	1000	6RX1800-4KK04
1577	0.032	716.8	1093.8	75 (200 ms)	226.1	1000	6RX1800-4KK05
1660	0.031	596.0	1011.8	75 (200 ms)	257.2	1000	6RX1800-4KK06
2158	0.024	484.8	1185.6	75 (200 ms)	360.2	1000	6RX1800-4KK07
Rated voltage 830 V							
789	0.077	312.0	532.1	75 (200 ms)	205.2	1000	6RX1800-4LK00
1245	0.049	692.4	1061.9	75 (200 ms)	222.4	1000	6RX1800-4LK01
1577	0.039	479.4	1059.6	75 (200 ms)	308.5	1000	6RX1800-4LK02
1826	0.033	585.6	1269.0	75 (200 ms)	372.5	1000	6RX1800-4LK03
Rated voltage 950 V							
1826	0.038	534.9	1303.5	75 (200 ms)	399.7	1000	6RX1800-4MK00

Note:

Commutating reactors with $u_K = 2\%$ are available on request. A limited tolerance range is also possible for parallel connections.

Single-phase commutating reactors, $u_K = 4\%$

AC rated current	Inductance	Copper losses	Total losses	Short-circuit current rating (SCCR)	Weight	Rated insulation voltage	Article No.
A	mH	W	W	kA	kg	V	
Rated voltage 400 V							
3	16.98	3	5	0.8 (20 ms)	0.7	600	6RX1800-4DE00
5	10.19	5	7	0.8 (20 ms)	1.5	600	6RX1800-4DE01
10	5.090	7	12	2 (20 ms)	2.0	600	6RX1800-4DE02
15	3.400	8	17	2 (20 ms)	2.3	600	6RX1800-4DE03
25	2.040	8	29	6 (20 ms)	3.0	600	6RX1800-4DE04
30	1.700	10	30	6 (20 ms)	3.8	600	6RX1800-4DE05
40	1.270	9	49	10 (20 ms)	5.2	600	6RX1800-4DE06
85	0.600	13	67	15 (20 ms)	9.6	600	6RX1800-4DE07

¹⁾ All commutating reactors with rated voltages $V_N \leq 600$ V to UL

SINAMICS DCM

Accessories and supplementary components

Circuit breakers and contactors

Overview

The main contactor or the circuit breaker in front of the three-phase armature circuit infeed of the converter is used to switch on the power section in a correct manner when the electronics and the voltage for the thyristor modules is enabled if the unit is still not operational. This is the reason that the contactor or the circuit breaker must always be energized via terminals XR1-109-110. When a circuit breaker is used, a motor-operated mechanism must be used to close the circuit breaker and an undervoltage release to open the circuit breaker.

Selection criteria

The internal control sequence guarantees that the switching operations are always made in a no-current condition. When selecting the main contactor, the utilization category AC-1 or for a circuit breaker, the maximum rated current $I_{n,max}$ should be used as basis. If the current and voltage quantities permit it, then generally, the more cost-effective solution using a contactor is preferred over a circuit breaker.

SINAMICS DCM

Accessories and supplementary components

Radio interference suppression filters

Overview

SINAMICS DC MASTER applications are in compliance with the EMC product standard EN 61800-3 for electric drives when taking into account that the units are integrated into the plant or system in compliance with EMC rules.

However, EMC legislation does stipulate that the plant or system as a whole must be electromagnetically compatible with its environment.

If radio interference suppression level "A1" according to EN 55011 is to be achieved, then in addition to the commutating reactors, radio interference suppression filters are also required. Radio interference suppression filters reduce radio interference voltages of the converter that occur in conjunction with the commutating reactor.

Radio interference suppression filters generate leakage currents. In accordance with DIN VDE 0160, a PE connection with a cross-section of 10 mm² is required. For the filters to have optimum effect, it is absolutely essential that they and the unit are installed on a single metal plate.

For converter units with three-phase connection, the minimum rated filter current is equal to the DC output current of the unit times 0.82. For a two-phase connection (field power section or single-phase connection of the armature power section) only two phases are connected to the three-phase radio interference suppression filter. In this case, the line current is equal to the field DC current.

List of the recommended radio interference suppression filters from EPCOS

Radio interference suppression filter			
Rated current	TN/TT system	IT system	Article No. EPCOS
A	V	V	
Line filters for armature circuit			
25	760/440	580/335	B84143A0025R021
50	760/441	580/335	B84143A0050R021
80	760/442	630/365	B84143A0080R021
120	760/443	630/365	B84143A0120R021
180	-	690/400	B84143B0180S024
180	520/300	360/208	B84143B0180S080
180	760/440	560/320	B84143B0180S081
250	520/300	360/208	B84143B0250S080
250	760/440	560/320	B84143B0250S081
400	-	690/400	B84143B0400S024
400	520/300	360/208	B84143B0400S080
400	760/440	560/320	B84143B0400S081
600	-	690/400	B84143B0600S024
600	520/300	360/208	B84143B0600S080
600	760/440	560/320	B84143B0600S081
1000	-	690/400	B84143B1000S024
1000	520/300	360/208	B84143B1000S080
1000	760/440	560/320	B84143B1000S081
1600	-	690/400	B84143B1600S024
1600	520/300	360/208	B84143B1600S080
1600	760/440	560/320	B84143B1600S081
2500	530/310	460/265	B84143B2500S020
2500	760/440	560/320	B84143B2500S021
2500	-	690/400	B84143B2500S024
Line filters for auxiliary power supply			
25	520/300	440/255	B84143A0025R105
50	520/301	440/256	B84143A0050R105
66	520/302	440/257	B84143A0066R105
90	520/303	440/258	B84143A0090R105
120	520/304	440/259	B84143A0120R105

SINAMICS DCM

Accessories and supplementary components

SICROWBAR AC


Application



SICROWBAR AC overvoltage protection

SICROWBAR AC is used to protect power semiconductors (thyristors and diodes) in converters against overvoltages between the phases of a three-phase line supply. The range of applications is not restricted to protecting DC drive converters, but can also be used for infeed/regenerative feedback units of AC drive systems that are equipped with thyristors. Overvoltages that occur on the AC side of converters are mainly caused by switching operations when disconnecting from the line supply at the transformer primary. This applies both to operational switching operations (shutdown under no-load conditions) as well as in the case of a fault (shutdown under load).

Overvoltage protection is normally used in the following configuration:

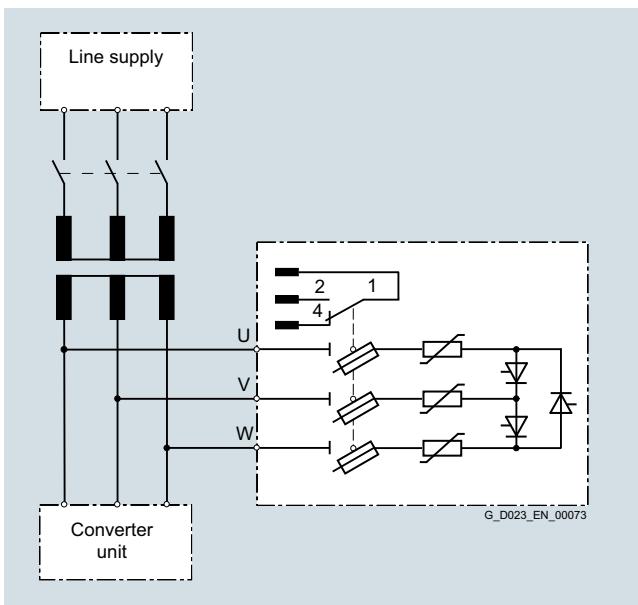

Design

There are three device versions depending on the rated voltage:

Version	Rated voltage	Design, installation
A	Up to 580 V	Mounted in an enclosure. For mounting in an upright position on panels in cabinets or machine frames.
B	Up to 725 V	Mounted on a baseplate. For installation in 600 m wide cabinets.
C	Up to 1150 V	Mounted on a baseplate. For installation in 600 m wide cabinets.

The power section of the overvoltage protection device has a P3C connection, 3-pulse fully controlled polygon connection. The feeders to the polygon connection have metal-oxide varistors that absorb overvoltage energy.

Semiconductor fuses included in the devices are accommodated in a fused disconnecter with integrated fuse monitoring.

The break-over diodes (BOD) and RC snubbers for the thyristors and varistors are mounted on a printed circuit board as are also the gate series resistors and diodes that transfer the line voltage to the break-over diodes.

Mode of operation

If an overvoltage occurs, which reaches the response voltage of the integrated firing module, then the break-over diodes trigger and in turn trigger their associated thyristors. As a consequence, the varistors are switched to the line supply. The varistors absorb the overvoltage energy. An RC protective circuit protects the thyristors against an excessively steep voltage rate of rise when the current is interrupted.

Configuration

Notes on selection

The following conditions should be maintained when selecting the overvoltage protection:

- The limit voltage of the overvoltage protection V_{RRM55} must not exceed the highest periodic and permissible peak blocking voltage of the power semiconductors to be protected.
- The rated supply voltage of the overvoltage protection must not be exceeded.
- Commutation overvoltages of the converter that periodically occur must remain below the response voltage of the overvoltage protection. The energy absorption capability of the selected overvoltage protection should be checked. A distinction must be made between two operating cases:
 - Transformer is shut down under no-load conditions
 - Transformer is shut down under load

Detailed notes on configuration, standards and connection of the overvoltage protection are provided in the operating instructions or on the Internet at <http://support.automation.siemens.com/WWW/view/en/18260008/130000>.

Technical specifications

General technical specifications	SICROWBAR AC
Degree of protection	IP00 acc. to EN 60529
Protection class	I according to EN 50178
Overvoltage category	III, corresponding to EN 60664
Dimensioning creepages and clearances	Pollution degree 2 acc. to EN 50178
Rated insulation voltage (for installation altitudes up to 2000 m above sea level) ¹⁾	725 V AC for rated supply voltages of 400 ... 725 V 1200 V AC for rated supply voltages of 850 ... 1150 V
Installation altitude	≤ 2000 m above sea level
Permissible ambient temperature	
• In operation	+5 ... +55 °C
• In storage	-40 ... +70 °C
Climate class	3K3 acc. to EN 60721-3-3
Fuse monitoring (microswitch at the fused disconnector, 1 changeover contact)	Flat connector 6.3 mm × 0.8 mm
• Disconnecter closed, all fuse links OK	1/2 closed, 1/4 opened
• Disconnecter closed, one or several fuse links defective	1/4 closed, 1/2 opened
• Disconnecter open	1/4 closed, 1/2 opened
• Maximum switching capacity	50 Hz 250 V AC, 3 A 30 V DC, 3 A

		SICROWBAR AC			
		7VV3002-3CD20	7VV3002-3AD20	7VV3002-3BD20	7VV3002-3GD20
Max. permissible rated supply voltage V_N	V	460		550	
Nominal response voltage of BOD element V_{AN}	V	1000	1200	1400	1600
Min. limit voltage of BOD element at 5 °C $V_{RRM_{05}}$	V	864	1056	1248	1440
Max. limit voltage of BOD element at 55 °C $V_{RRM_{55}}$	V	1166	1378	1590	1802
Max. permissible peak current, I_{max}	A	200	1000		2000
Rated insulation voltage (the insulation voltage is determined by the highest rated supply voltage of the relevant construction type) V_{ISO}	V	550			
Varistor voltage (breakdown voltage) at $T_A = 25$ °C, 1 mA (data sheet value × 2 for 2 series-connected varistors) V_V	V	720		860	
Max. energy (for 2 ms) at $T_A = 85$ °C (data sheet value × 2 for 2 series-connected varistors) W_0	Ws	600		720	
Energy that can be absorbed 100 times (determined from the derating data) W_2	Ws	350		419	
Energy that can be absorbed 10000 times (determined from the derating data) W_4	Ws	42		50	
Version		A			
Dimensions					
• Width	mm	265			
• Height	mm	385			
• Depth	mm	237			
Weight, approx.	kg	7			

¹⁾ Installation altitudes above 2000 m on request.

SINAMICS DCM

Accessories and supplementary components

SICROWBAR AC

Technical specifications (continued)

		SICROWBAR AC				
		7VV3002-3DD20	7VV3002-3ED20	7VV3002-3JD20	7VV3002-3KD20	7VV3002-3LD20
Max. permissible rated supply voltage V_N	V	770	920		1100	
Nominal response voltage of BOD element V_{AN}	V	1900	2400	2600	2800	3000
Min. limit voltage of BOD element at 5 °C $V_{RRM,05}$	V	1728	2208	2400	2592	2784
Max. limit voltage of BOD element at 55 °C $V_{RRM,55}$	V	2120	2650	2862	3074	3286
Max. permissible peak current, I_{max}	A	300	800	1000	400	1000
Rated insulation voltage (the insulation voltage is determined by the highest rated supply voltage of the relevant construction type) V_{ISO}	V	770	1100			
Varistor voltage (breakdown voltage) at $T_A = 25$ °C, 1 mA (data sheet value $\times 2$ for 2 series-connected varistors) V_V	V	1240	1500		1820	
Max. energy (for 2 ms) at $T_A = 85$ °C (data sheet value $\times 2$ for 2 series-connected varistors) W_0	Ws	2400	3300		3000	
Energy that can be absorbed 100 times (determined from the derating data) W_2	Ws	986	1196		1027	
Energy that can be absorbed 10000 times (determined from the derating data) W_4	Ws	145	176		214	
Version		B	C			
Dimensions						
• Width	mm	580				
• Height	mm	305				
• Depth	mm	205	245			
Weight, approx.	kg	11	12			

Selection and ordering data

Rated supply voltage	Limit voltage	SICROWBAR AC
V	V	Article No.
460	1166	7VV3002-3CD20
460	1378	7VV3002-3AD20
550	1590	7VV3002-3BD20
550	1802	7VV3002-3GD20
770	2120	7VV3002-3DD20
920	2650	7VV3002-3ED20
920	2862	7VV3002-3JD20
1100	3074	7VV3002-3KD20
1100	3286	7VV3002-3LD20

Accessories

For information about spare parts, go to <http://workplace.automation.siemens.de/sparesonweb>.


Application



SICROWBAR DC overvoltage protection 7VV3003-5...

SICROWBAR DC protects windings and converters against overvoltage when supplying large inductances, e.g. field windings of synchronous machines, DC machines or hoisting solenoids.

Further, it is optionally possible to initiate fast de-excitation – triggered by a higher-level signal – for units 7VV3003-5... . An appropriate de-excitation/discharge resistor must be provided.

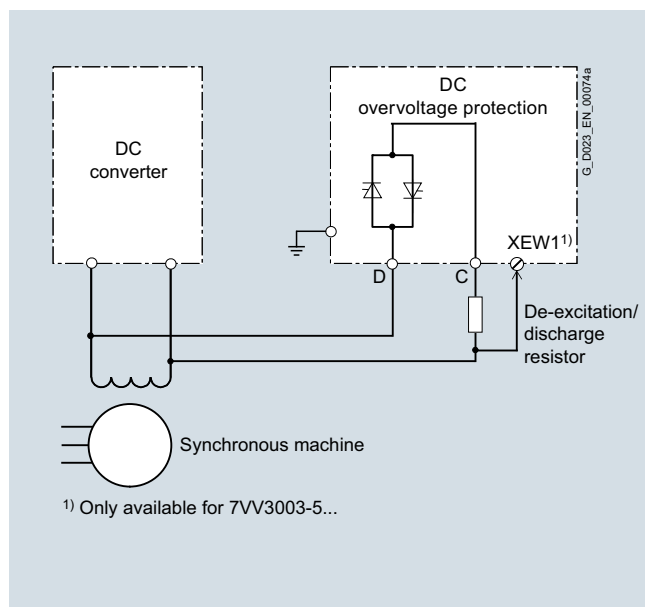

Design

The most important components of the device are:

- Two thyristors in an anti-parallel connection
- A firing circuit, which, depending on the version, triggers a thyristor in the blocking direction at a defined voltage
- A module to detect the voltage at the de-excitation/discharge resistor, detect the current being conducted, identify when the overvoltage protection device triggers and signal the status using binary outputs (applies only to 7VV3003-5...).
- The power connections C, D (copper bars)
- Terminal XEW1 to connect the sensor cable from the de-excitation/discharge resistor (applies only to 7VV3003-5...).
- An "Optional fast de-excitation" module (option G11). The module allows the thyristors to be fired at any time by controlling three fast relays that are independent of one another (applies only to 7VV3003-5...).

Mode of operation

The two thyristors connected in an anti-parallel connection, located between connections C and D, can briefly (approx. 5 s) conduct the pulse current. The overvoltage triggers a break-over diode (BOD) on the trigger circuit which in turn triggers the blocking thyristor and conducts the firing current past the blocking thyristor through a diode connected in an anti-parallel configuration to its gate/cathode. Independent of the polarity of the overvoltage, the break-over diode is always operated in the same direction using a bridge rectifier and the firing current is limited using series resistors. The thyristor fires within just a few microseconds and the voltage decreases quickly down to the forward voltage (1 to 1.5 V). The load current increases the temperature of the thyristor within just a few seconds and the thyristor and the stack construction (in the case of units 7VV3003-5...) absorb the thermal energy. As a consequence, the load cycle can only be repeated after a cooling time has elapsed (see Technical specifications).

The following also applies to units 7VV3003-5...:

The fast de-excitation option (G11) is connected to the firing circuit in such a way that the thyristors can be triggered at any time by controlling at least one of the three fast relays – that are independent of one another. This assumes that there is sufficient voltage. Generally, this is approximately 5 % of the trigger voltage. Each of the three relays can be controlled with 24 V DC, 110 V to 125 V DC or 220 V to 240 V DC.

The voltage detection for the de-excitation/discharge resistor is connected to the external de-excitation/discharge resistor. When the voltage detection responds, the supplying converter must be blocked or the current controlled down to zero. The voltage detection module requires an external 24 V DC power supply with min. 100 mA.

The following generally applies:

The de-excitation/discharge resistor is an external device and is not included in the scope of delivery of the SICROWBAR DC. Its resistance must be so low that even at the highest load current, the voltage is still under the destruction limit of the supplying converter and/or the winding to be protected. The lowest possible resistance is defined by the supply voltage and the maximum load current of the converter (dimensioning the fuses). The required de-excitation time must also be taken into account when dimensioning the value of the resistance.

SINAMICS DCM

Accessories and supplementary components

SICROWBAR DC

Configuration

The complete arrangement comprises a SICROWBAR DC overvoltage protection and de-excitation/discharge resistor.

The following device parameters that are used to select the device must be determined:


1. The firing voltage – if this is reached, then the thyristors of the SICROWBAR DC are turned on.
2. The maximum current that flows or the maximum Pt value that occurs.

Detailed information about configuration, applicable standards and connection of the overvoltage protection are provided in the operating instructions or on the Internet at:


- For units 7VV3003-5...:
<http://support.automation.siemens.com/WW/view/en/21696826>
- For units 7VV3003-6...:
<http://support.automation.siemens.com/WW/view/en/86152590>

Typical load current characteristic

7VV3003-5...:

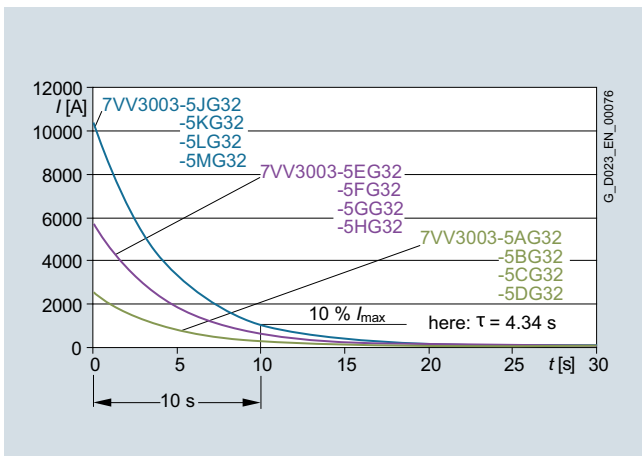


7VV3003-6...:

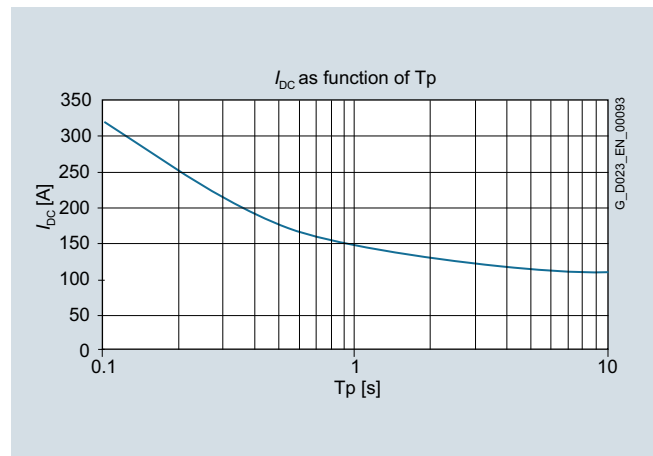



4

Cooling time

7VV3003-5...:

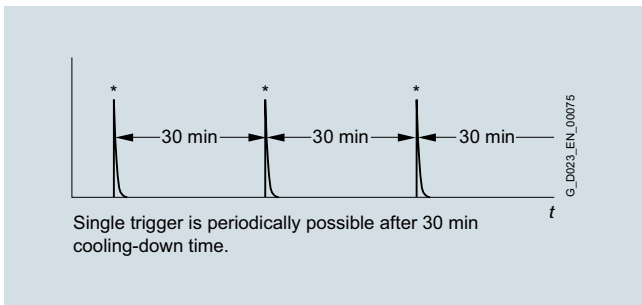

7VV3003-6...:

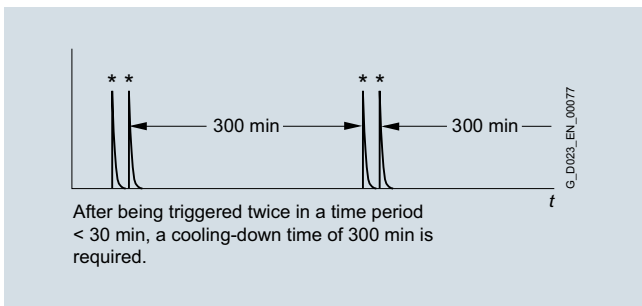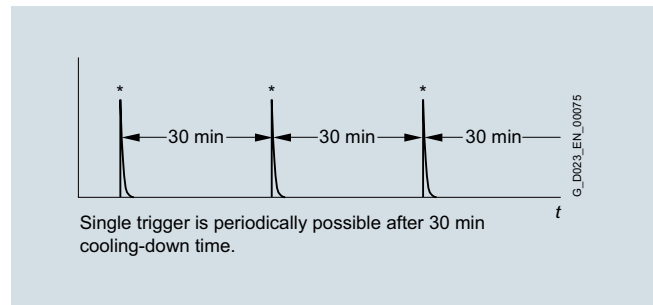

Technical specifications

General technical specifications	SICROWBAR DC 7VV3003-6...
Degree of protection	IP00 acc. to EN 60529
Overvoltage category	II acc. to EN 60664
Installation altitude	≤ 1000 m above sea level
Base plate insulation	3600 Vrms/1s
Climate class	3K5 (without condensation) acc. to EN 60721-3-3
Permissible ambient temperature	
• In operation	-25 ... +45 °C
• In storage	-40 ... +85 °C

	SICROWBAR DC		
		7VV3003-6BG30	7VV3003-6CG30
Response voltage	V	1200 ± 50	1500 ± 50
Max. rated supply system voltage V_L for B6C circuit	V	0 ... 420 3 AC + 10 %	0 ... 500 3 AC + 10 %
Max. pulse current	kA	0.3	
I^2t	A ² s	0.02 × 10 ⁶	
Dimensions			
• Width	mm	93	
• Height	mm	51	
• Depth	mm	85	
Weight, approx.	kg	0.18	

General technical specifications	SICROWBAR DC 7VV3003-5...
Degree of protection	IP00 acc. to EN 60529
Protection class	I acc. to EN 50178
Overvoltage category	III acc. to EN 60664
Dimensioning creepages and clearances	Pollution degree 2 acc. to EN 50178
Installation altitude	≤ 2000 m above sea level
Insulation test voltage of the power section (first test) with respect to the housing, voltage detection (signal part) and fast de-excitation (control)	5.5 kV 50 Hz 1 minute corresponding to EN 60034-1 for rated de-excitation voltages up to 750 V DC
Climate class	3K3 acc. to EN 60721-3-3
Permissible ambient temperature	
• In operation	0 ... +40 °C
• In storage	-25 ... +70 °C
Power supply required for the voltage detection	24 V DC, +10 % , -20 %, 100 mA

	SICROWBAR DC					
		7VV3003-5AG32	7VV3003-5BG32	7VV3003-5CG32	7VV3003-5PG32	7VV3003-5DG32
Response voltage	V	800 ± 100	1200 ± 100	1600 ± 100	1900 ± 100	2200 ± 150
Max. pulse current for typical characteristic	kA	2.5				
Critical pulse current (sine peak 10 ms)	kA	5				
Critical voltage gradient	V/μs	1000				
Critical current gradient	A/μs	80				
I^2t	A ² s	13.6 × 10 ⁶				
Dimensions						
• Width	mm	265				
• Height	mm	350				
• Depth	mm	285				
Weight, approx.	kg	17				

SINAMICS DCM

Accessories and supplementary components

SICROWBAR DC

Technical specifications (continued)

		SICROWBAR DC				
		7VV3003-5EG32	7VV3003-5QG32	7VV3003-5FG32	7VV3003-5GG32	7VV3003-5HG32
Response voltage	V	1600 ± 100	1900 ± 100	2200 ± 150	2600 ± 150	3000 ± 150
Max. pulse current for typical characteristic	kA	5.8				
Critical pulse current (sine peak 10 ms)	kA	11.6				
Critical voltage gradient	V/μs	1000				
Critical current gradient	A/μs	300				
I^2t	A ² s	73 × 10 ⁶				
Dimensions						
• Width	mm	265				
• Height	mm	350				
• Depth	mm	285				
Weight, approx.	kg	18				

		SICROWBAR DC				
		7VV3003-5JG32	7VV3003-5RG32	7VV3003-5KG32	7VV3003-5LG32	7VV3003-5MG32
Response voltage	V	1600 ± 100	1900 ± 100	2200 ± 150	2600 ± 150	3000 ± 150
Max. pulse current for typical characteristic	kA	10.5				
Critical pulse current (sine peak 10 ms)	kA	21				
Critical voltage gradient	V/μs	1000				
Critical current gradient	A/μs	300				
I^2t	A ² s	239 × 10 ⁶				
Dimensions						
• Width	mm	265				
• Height	mm	350				
• Depth	mm	285				
Weight, approx.	kg	20				

Selection and ordering data

SIMOREG DC-MASTER SINAMICS DC MASTER	SICROWBAR DC		SICROWBAR DC Article No.
	Rated armature supply voltage V	Pulse current, max. kA	
	Units 7VV3003-6...		
400	0.3	1200	7VV3003-6BG30
480	0.3	1500	7VV3003-6CG30
	Units 7VV3003-5...		
-	2.5	800	7VV3003-5AG32
400, 480	2.5	1200	7VV3003-5BG32
575	2.5	1600	7VV3003-5CG32
	5.8		7VV3003-5EG32
	10.5		7VV3003-5JG32
690	2.5	1900	7VV3003-5PG32
	5.8		7VV3003-5QG32
	10.5		7VV3003-5RG32
830	2.5	2200	7VV3003-5DG32
	5.8		7VV3003-5FG32
	10.5		7VV3003-5KG32
950	5.8	2600	7VV3003-5GG32
	10.5		7VV3003-5LG32
	-		5.8
	10.5		7VV3003-5MG32

Accessories

For information about spare parts, go to <http://workplace.automation.siemens.de/sparesonweb>.

Options

Options for units 7VV3003-5...:

Option	Order code	Notes	Article No. for separate order
Fast de-excitation	G11	Initiation of fast de-excitation by one of the three relays, of which each has the following control voltages: <ul style="list-style-type: none"> • 220 ... 240 V DC, +10 % -20 % • 110 ... 125 V DC, +10 % -20 % • 24 V DC, +10 % -20 % 	7VV3003-7FG00

Overview



SIMOREG CCP

The Converter Commutation Protector SIMOREG CCP is used to protect line-commutated SINAMICS DC MASTER converters in inverter operation against inverter commutation faults.

For line-commutated inverters, an appropriate line-side counter voltage is required in order to commute the current between the individual power semiconductors. Commutation can be prevented from being completed (commutation fault) as a result of uncontrolled switching operations, line supply dips (weak line supplies, thunderstorms, etc.). As a result, in the regenerative feedback direction, a high current flows through the line supply or a cross-current in the converter. This can result in fuses blowing or under certain circumstances can destroy the semi-conductors.

The firmware of the SINAMICS DC MASTER identifies if inverter commutation faults are pending and then issues the command to turn off the power semiconductors in the converter to the SIMOREG CCP. SIMOREG CCP then turns off the power semiconductors, ensures that the conditions to reduce the current in the motor are present and absorbs the magnetic energy stored in the motor as electric energy.

Benefits

SIMOREG CCP limits the current that flows when inverter commutation faults occur to a non-hazardous value so that the thyristors and the associated super-fast fuses are protected. This eliminates the complex and time consuming replacement of fuses after inverter commutation faults.

Although inverter commutation faults cannot be prevented, their effects can be.

- Gear units and the driven machine are protected by shutting off the current in time before it reaches its possible maximum value in the case of a fault therefore protecting them against inadmissibly high torque surges.
- For high rated system currents, up until now, high-speed DC circuit breakers were used up until now to protect the fuses against rupture. By using the CCP, protection is now cost-effectively possible even for lower line currents, whereby SIMOREG CCP has the following advantages when compared to high-speed DC circuit breakers even at high current levels:
 - Protection also for circulating currents
 - Lower system costs
 - Lower space requirements
 - No additional air reactor to reduce the current rate-of-rise when a fault occurs
 - Lower operating costs, as it requires no maintenance
 - High degree of availability

Design

SIMOREG CCP distinguishes itself as a result of the compact and space-saving design.

Function

The line supply voltage, line current as well as the armature voltage are continually sensed in SINAMICS DC MASTER.

A possible commutation fault (inverter commutation fault – inverter shoot-through) is detected from these quantities, which results in the following measures being initiated:

1. The firing pulses are immediately disabled in the SINAMICS DC MASTER
2. The converter sends a "turn-off command" to SIMOREG CCP (via the serial interface).
3. SIMOREG CCP turns off the thyristors by connecting the pre-charged quenching capacitors anti-parallel to all thyristors. As a consequence, the current commutates from the converter into SIMOREG CCP. The quenching capacitors are initially discharged by the currents that they accept and they are then charged with the reverse polarity. The armature current starts to decrease as soon as the voltage of the quenching capacitors has reached the value of the motor EMF. However, the armature voltage continues to increase. As soon as it has reached the limit value, resistors are switched in, which absorb the energy fed back from the motor during the remaining time of the current reduction phase.
4. A fault message is initiated in the SINAMICS DC MASTER.
5. The SIMOREG CCP re-charges the quenching capacitors with the reverse polarity so that a new quenching operation is possible.

Each time that the line supply voltage is switched in (e.g. via a line contactor), SIMOREG CCP requires approximately 3 s until it is ready for use as the quenching capacitors must first be charged up.

After a quenching operation, SIMOREG CCP requires a certain time until it is ready for use again. The duration depends on the operations during the quenching process and immediately afterwards. On the one hand, the quenching capacitors in SIMOREG CCP must be charged to the required value with the reverse polarity (approx. 10 s). On the other hand, the chopper resistors, that convert the energy into heat when the armature current is reduced, require a cooling time calculated using an algorithm in the firmware. Depending on the amount of energy that was dissipated, this can take up to approx. 20 min.

SINAMICS DC MASTER has setting and monitoring parameters for commissioning, operation, monitoring and diagnostics of the SIMOREG CCP. The state of the SIMOREG CCP is signaled via connectors and the triggering of the SIMOREG CCP or erroneous states are signaled using fault and alarm messages.

Data is exchanged between the SINAMICS DC MASTER and SIMOREG CCP via the serial interface.

SINAMICS DCM

Accessories and supplementary components

SIMOREG CCP

Integration

SINAMICS DC MASTER – SIMOREG CCP

The following table lists the SIMOREG CCP units that are suitable for the particular SINAMICS DC MASTER.

This information is based on the rated unit data (taking into consideration the particular limit values) of the components and on the other hand, typical rated data for Siemens DC motors from Catalog DA 12 · 2008.

Note:

For plant and system configurations with reduced rated values (e.g. DC rating, US rating, voltage derating), under certain circumstances, suitable combinations of units can be found that are not listed in the table.

For detailed engineering and when selecting the appropriate CCP, technical support personnel can provide assistance through the local Siemens office. For this purpose, the following plant data must be specified:

- Line supply voltages and power sections
- Required undervoltage range of the power section
- Rated motor armature voltage
- Rated motor current
- Details on the required overcurrent where necessary (magnitude, cycle duration)
- Inductance of the load (motor, cable plus if required a smoothing reactor)

SINAMICS DC MASTER			SIMOREG CCP		
Type	Rated DC voltage V	Rated DC current A	Type	Rated voltage V	Rated current A
6RA8078-6DV62-0AA0	420	280	6RA7085-6FC00-0	460 3 AC	600 DC
6RA8081-6DV62-0AA0		400			
6RA8085-6DV62-0AA0		600			
6RA8078-6FV62-0AA0	480	280			
6RA8082-6FV62-0AA0		450			
6RA8085-6FV62-0AA0		600			
6RA8085-6DV62-0AA0	420	600	6RA7091-6FC00-0		1200 DC
6RA8087-6DV62-0AA0		850			
6RA8091-6DV62-0AA0		1200			
6RA8085-6FV62-0AA0	480	600			
6RA8087-6FV62-0AA0		850			
6RA8091-6FV62-0AA0		1200			
6RA8091-6DV62-0AA0	420	1200	6RA7095-6FC00-0		2000 DC
6RA8093-4DV62-0AA0		1600			
6RA8095-4DV62-0AA0		2000			
6RA8081-6GV62-0AA0	600	400	6RA7090-6KC00-0	690 3 AC	1000 DC
6RA8085-6GV62-0AA0		600			
6RA8087-6GV62-0AA0		850			
6RA8086-6KV62-0AA0	725	760			
6RA8090-6KV62-0AA0		1000			
6RA8090-6GV62-0AA0	600	1100	6RA7095-6KC00-0		2000 DC
6RA8093-4GV62-0AA0		1600			
6RA8095-4GV62-0AA0		2000			
6RA8090-6KV62-0AA0	725	1000			
6RA8093-4KV62-0AA0		1500			
6RA8095-4KV62-0AA0		2000			

Technical specifications

		SIMOREG CCP				
		Type				
		6RA7085-6FC00-0	6RA7091-6FC00-0	6RA7095-6FC00-0	6RA7090-6KC00-0	6RA7095-6KC00-0
Rated voltage	V	460 (+15 %/-20 %)			690 (+10 %/-20 %)	
Rated current	A	600	1200	2000	1000	2000
Current range that can be covered ¹⁾	A	up to 600	up to 1200	up to 2000	up to 1000	up to 2000
Rated supply voltage, electronics power supply	V	380 (-20 %) ... 60 (+15 %) 2 AC; $I_n = 1$ A or 190 (-20 %) ... 230 (+15 %) 1 AC; $I_n = 2$ A				
Rated frequency	Hz	45 ... 65				
Power loss	W	100				
Ambient temperature						
• Operation	°C	0 ... 55				
• Storage and transport	°C	-25 ... +70				
Installation altitude above sea level	m	≤ 1000 m				
Climate class		3K3 acc. to EN 60721-3-3				
Degree of pollution		2 acc. to EN 50178 ²⁾				
Degree of protection		IP00 acc. to EN 60529				
Dimensions						
• Width	mm	406				
• Height	mm	780				
• Depth	mm	500				
Weight, approx.	kg	35	35	55	45	75
Fuse for connections 1U1, 1V1, 1W1 and 1D1		3NA3365-6 1 each	3NA3365-6 1 each	3NA3365-6 2 each in parallel	3NA3365-6 1 each	3NA3365-6 2 each in parallel
Fuse for connections 2U1, 2V1, 2W1 (10 A cable protection)		DIAZED 5SD604				

¹⁾ The current range that can be covered corresponds to the actual rated current of the SINAMICS DC MASTER. When the rated current is reduced (via parameter) then the lower value obtained applies. This means that for a SINAMICS DC MASTER with (according to the rating plate) a rated current higher than 2000 A (necessary e.g. to maintain longer specified overload times), it is possible to use the CCP if the actual rated current, specified by the parameterization, does not exceed 2000 A. The possible overload capability of 1.8x the actual rated current can be additionally utilized.

²⁾ Definition of pollution degree 2:
Generally only non-conductive pollution occurs. However, occasionally conductive pollution can be expected for a short period of time if the electronic equipment is not operational.

SINAMICS DCM

Accessories and supplementary components

SIMOREG CCP

Technical specifications (continued)

General technical specifications			
Relevant standards			
EN 50178	Electronic equipment for use in power installations		
EN 50274	Low-voltage switchgear and controlgear assemblies: Protection against electric shock – Protection against unintentional direct contact with hazardous live parts		
EN 60146-1-1	Semiconductor converters: General requirements and line-commutated converters; specification of basic requirements		
EN 61800-1	Adjustable speed electrical power drive systems, Part 1 – (DC drives) General requirements – Rating specifications for low voltage adjustable speed DC power drive systems		
EN 61800-3	Adjustable speed electrical power drive systems, Part 3 – EMC product standard including specific test methods		
EN 61800-5-1	Adjustable speed electrical power drive systems – Part 5-1: Safety requirements – electrical, thermal and energy requirements		
IEC 62103 (identical to EN 50178)	Electronic equipment for use in power installations		
UBC 97	Uniform Building Code		
Mechanical strength	Storage	Transport	Operation
Vibratory load	1M2 acc. to EN 60721-3-1 (dropping not permissible)	2M2 acc. to EN 60721-3-2 (dropping not permissible)	Constant deflection: 0.075 mm at 10 to 58 Hz Constant acceleration: 10 m/s ² at > 58 to 200 Hz (testing and measuring techniques acc. to EN 60068-2-6, Fc)
Shock load			100 m/s ² at 11 ms (testing and measuring techniques acc. to EN 60068-2-27, Ea)
Approvals			
UL/cUL	UL file No.: E145153		
UL 508 C (UL Standard for Power Conversion Equipment)	Certification of the units up to and including 575 V		
GOST			

Selection and ordering data


Rated voltage V	Rated current A	SIMOREG CCP Article No.
460	600	6RA7085-6FC00-0
	1200	6RA7091-6FC00-0
	2000	6RA7095-6FC00-0
690	1000	6RA7090-6KC00-0
	2000	6RA7095-6KC00-0

Accessories

Description	Article No.
Operating instructions for SIMOREG CCP in printed form • English, German	6RX1700-0DD74 (edition 04 and later)
Operating instructions for SINAMICS DC MASTER and SIMOREG CCP on DVD English, French, German, Italian, Spanish, Russian ¹⁾	6RX1800-0AD64 (for SIMOREG CCP edition 04 and later)
Patch cable UTP CAT5 according to ANSI/EIA/TIA 568 Parallel patch cable for SINAMICS DC MASTER and SIMOREG CCP, approx. 5 m, connecting cable, pulse inhibit interface to connected SIMOREG CCPs in parallel, connecting cable, pulse inhibit interface to the SINAMICS DC MASTER	6RY1707-0AA08
FiringUnitTrigger Board Printed circuit board to inhibit the firing pulses for a parallel connection	6RY1803-0CP00

¹⁾ Operating instructions for SIMOREG CCP available only in German and English.

Circuit diagrams

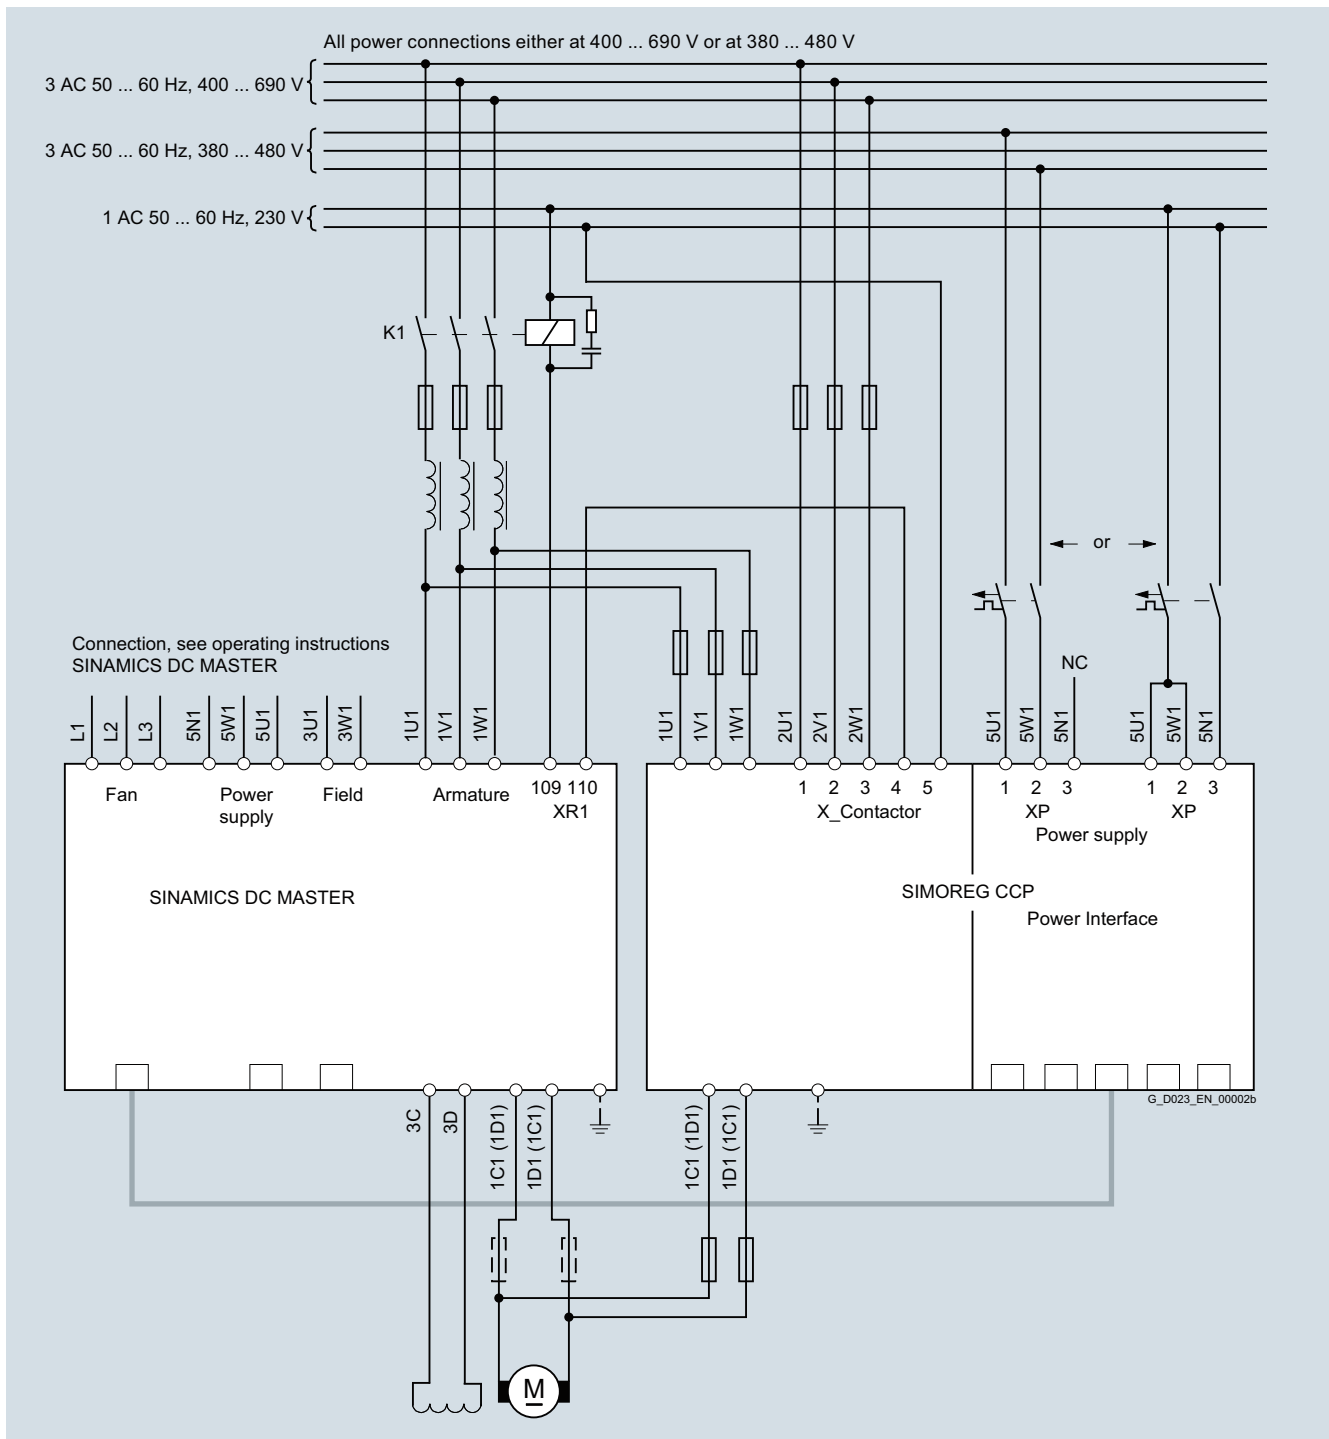

Block diagram

Operation without a main contactor is not permissible. The control voltage for the main contactor (or the circuit breaker) must always be routed via terminal XR (connection 109 and 110) of the SINAMICS DC MASTER and via terminal X_CONTACTOR (connections 4 and 5) of the SIMOREG CCP.

For applications with SIMOREG CCP, in the case of a converter or SIMOREG CCP fault, the arrangement must be able to be safely disconnected from the line supply. Further, it must be ensured that the total of the delay times of all of the switching elements in the control circuit must not exceed the time set using the corresponding parameters. When SINAMICS DC MASTER units are connected in parallel, each unit is directly connected to a SIMOREG CCP in parallel (refer to the block diagram for the parallel connection).

Engineering information



5/2	Dynamic overload capability
5/2	Overview
5/2	<ul style="list-style-type: none"> • Determining the dynamic overload capability
5/15	<ul style="list-style-type: none"> • Load classes
5/17	<ul style="list-style-type: none"> • Duty cycles for two-quadrant operation
5/18	<ul style="list-style-type: none"> • Duty cycles for four-quadrant operation
5/15	More information
5/19	Parallel connection
5/19	Overview
5/19	<ul style="list-style-type: none"> • Parallel connection of SINAMICS DC MASTER units
5/19	More information
5/20	12-pulse operation
5/20	Overview
5/20	<ul style="list-style-type: none"> • SINAMICS DC MASTER for 12-pulse operation
5/20	More information
5/20	Supply of high inductances
5/20	Overview
5/20	<ul style="list-style-type: none"> • SINAMICS DC MASTER to supply high inductances
5/20	More information
5/20	Protection against condensation
5/20	Overview
5/20	<ul style="list-style-type: none"> • Protection against condensation
5/21	Characteristic values of the pulse tachometer evaluation electronics
5/21	Overview
5/21	<ul style="list-style-type: none"> • Input pulse levels
5/21	<ul style="list-style-type: none"> • Switching frequency
5/21	<ul style="list-style-type: none"> • Cable, cable length, shield connection
5/22	Notes for EMC-compliant drive installation
5/22	Overview
5/22	<ul style="list-style-type: none"> • Notes for EMC-compliant installation
5/22	<ul style="list-style-type: none"> • Basic information about EMC
5/24	<ul style="list-style-type: none"> • EMC-compliant drive installation (installation instructions)
5/28	Harmonics
5/28	Overview
5/28	<ul style="list-style-type: none"> • Line-side harmonics produced by converter units in a fully-controlled three-phase bridge circuit B6C and (B6)A(B6)C

Overview

Determining the dynamic overload capability

Function overview

The rated DC current specified on the unit rating plate (maximum permissible continuous DC current) may be exceeded in operation. The extent to which this value is exceeded and how long this lasts are subject to certain limits, which are explained in more detail in the following.

The absolute upper limit for the value of the overload currents is 1.8x the rated DC current. The maximum overload duration depends on the time characteristic of the overload current as well as on the load history of the unit and also depends on the specific unit.

Each overload must be preceded by an underload (load phase with load current < rated DC current). Once the maximum permissible overload duration has elapsed, the load current must return to at least an absolute value \leq the rated DC current.

The dynamic overload duration is made possible by thermally monitoring the power section (I^2t monitoring). I^2t monitoring uses the time characteristic of the actual load current to calculate the time characteristic of a substitute value for the increase of the depletion layer temperature of the thyristors above the ambient temperature. In this case, unit-specific properties (e.g. thermal resistances and time constants) are incorporated in the calculation. When the converter unit is switched on, the calculation process starts with the initial values that were determined before the shutdown/line supply failure. The environmental conditions (ambient temperature and installation altitude) must be taken into account when setting a parameter.

I^2t monitoring responds when the calculated substitute depletion layer temperature rise exceeds the permissible value. Two alternatives can be parameterized as response:

- Alarm with a reduction of the armature current setpoint to the rated DC current or
- Fault with unit shutdown

I^2t monitoring can be disabled. In this case, the armature current is limited to the rated DC current.

Configuring for the dynamic overload capability

The configuring sheets contain the following information:

- The maximum overload duration t_{an} when starting with a cold power section and specified, constant overload,
- The maximum zero current interval t_{ab} (maximum cooling down time) until the "cold" thermal state of the power section is reached, and
- Fields of limiting characteristic for determining the overload capability during thermally stabilized, intermittent operation with overload (periodic duty cycles)

Technical support personnel from the local Siemens office can provide assistance with the selection of units for duty cycles involving multiple duty stages and cycle times in excess of 300 s.


Remark: The power section is considered to be "cold" if the calculated substitute depletion layer temperature rise is less than 5 % of its maximum permissible value. This state can be queried using a binary assignable output.

Structure of the fields of limiting characteristics for intermittent operation with overload

The fields of limiting characteristics refer to a duty cycle of the intermittent overload operation with a total duration (time period) of 300 s. Such a duty cycle comprises two time sections – the base-load duration (armature current actual value \leq rated DC current) and the overload duration (armature current actual value \geq rated DC current).

Each limiting characteristic represents a unit-specific maximum base-load current for a specific overload factor (limiting base-load current, specified as a % of the rated DC current) over the minimum base-load duration (limiting base-load duration). For the remaining duration of the duty cycle, the maximum permissible overload current is determined by the overload factor. If no limiting characteristic has been specified for the required overload factor, then it will be subject to the limiting characteristic for the next highest overload factor.

The fields of limiting characteristics are valid for a duty cycle of 300 s. Using basic calculation algorithms, duty cycles can be configured with duty cycle durations of longer than or shorter than 300 s. This will now be shown using two basic tasks.

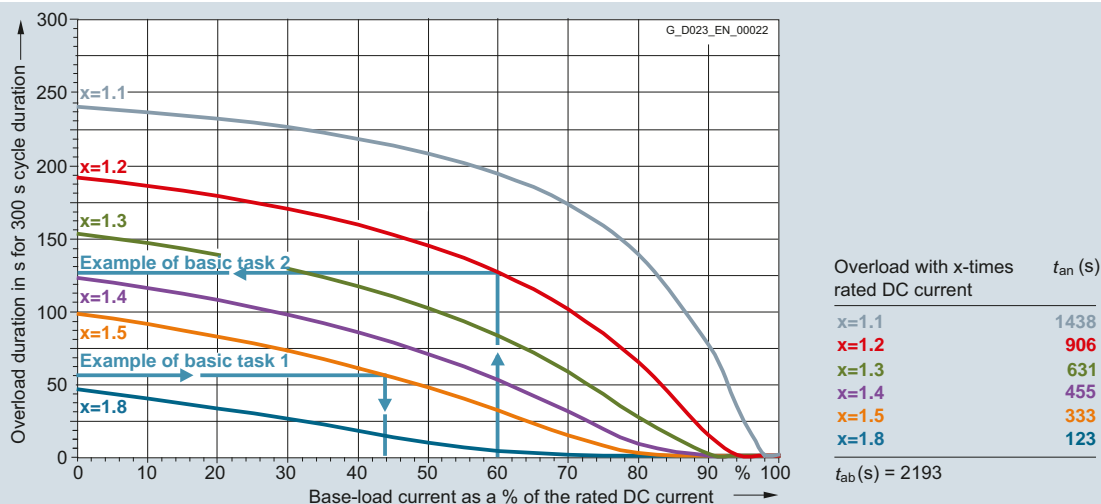

Characteristic example for basic tasks 1 and 2

Overview (continued)

Basic task 1

- Given:
Unit, cycle duration, overload factor, overload duration
- To be found:
(Min.) base-load duration and max. base-load current
- Solution:

	Cycle duration	
	< 300 s	≥ 300 s
1. Determine the characteristic	Select the limiting characteristic for the specific unit and the specific overload factor	
2. Overload duration ₃₀₀ =	300 s/cycle duration × overload duration	Overload duration ₃₀₀
3. Base-load duration ₃₀₀ =	300 s – overload duration ₃₀₀	
4. Base-load duration ₃₀₀ < base-load duration ₃₀₀ for max. base-load current = 0	Yes: Required duty cycle cannot be configured No: Read the max. base-load current for overload duration ₃₀₀ from the limiting characteristic	
5. Determine the percentage for the base-load current	Read the percentage for the base-load currents from the diagram	

Example for basic task 1

- Given:
 - Unit with 30 A
 - Cycle duration 113.2 s
 - Overload factor 1.45
 - Overload duration 20 s
- To be found:
 - (Min.) base-load duration
 - Max. base-load current
- Solution:
 - Limiting characteristic for a unit with 30 A
 - Overload factor 1.5
 - Overload duration₃₀₀ = 300 s/113.2 s × 20 s = 53 s →
 - Max. base-load current = 44 % I_{rated} = 13.2 A

Basic task 2

- Given:
Unit, cycle duration, overload factor, base-load current
- To be found:
Maximum overload duration, minimum base-load duration
- Solution:

	Cycle duration	
	< 300 s	≥ 300 s
1. Determine the characteristic	Select the limiting characteristic for the specific unit and the specific overload factor	
2. Max. overload duration =	(Cycle duration/300 s) × overload duration ₃₀₀	300 s – base-load duration ₃₀₀
3. Min. base-load duration =	Cycle duration – max. overload duration	Cycle duration – max. overload duration

Example for basic task 2

- Given:
 - Unit with 30 A
 - Cycle duration 140 s
 - Overload factor 1.15
 - Base-load current = 0.6 × I_{rated} = 18 A
- To be found:
 - Maximum overload duration
 - Minimum base-load duration
- Solution:
 - Limiting characteristic for a unit with 30 A
 - Overload factor 1.2
 - Base-load current = 60 % I_{rated} →
 - Overload duration₃₀₀ = 127 s
 - Max. overload duration = 140 s/300 s × 127 s = 59 s
 - Min. base-load duration = 140 s - 59 s = 81 s

Explanation of terms:

Base-load duration₃₀₀ = min. base-load duration for 300 s cycle duration (300 s – overload duration)


Overload duration₃₀₀ = max. overload duration for 300 s cycle duration

SINAMICS DCM

Engineering information

Dynamic overload capability


Overview (continued)

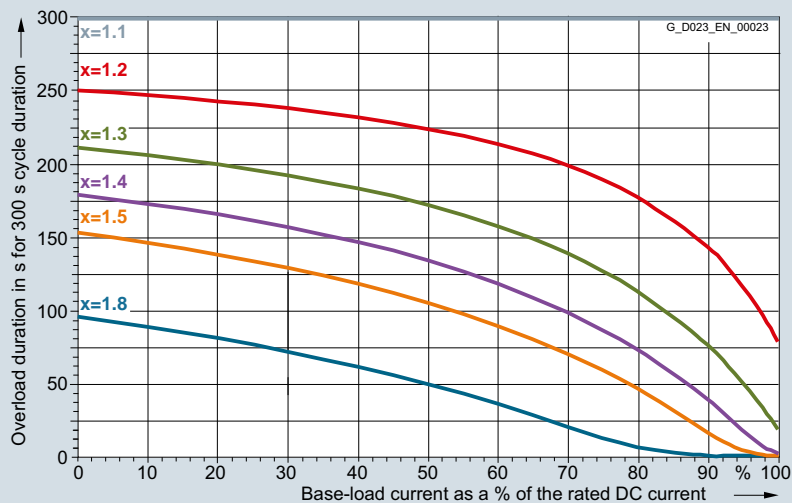

Overload with x-times rated DC current	t_{an} (s)
x=1.1	9227
x=1.2	1633
x=1.3	1112
x=1.4	833
x=1.5	651
x=1.8	342

t_{ab} (s) = 2303


6RA8013-6DV62-0AA0 15 A/four-quadrant operation 400 V, 6RA8013-6FV62-0AA0 15 A/four-quadrant operation 480 V

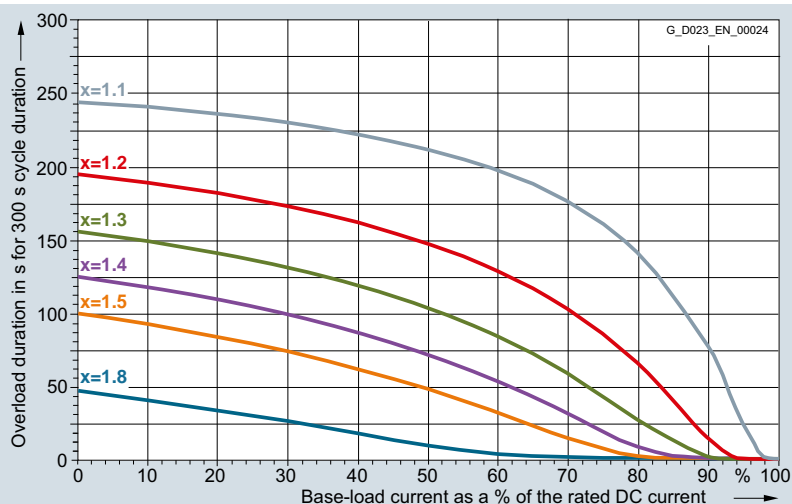

Overload with x-times rated DC current	t_{an} (s)
x=1.1	1438
x=1.2	906
x=1.3	631
x=1.4	455
x=1.5	333
x=1.8	123

t_{ab} (s) = 2193

6RA8018-6DV62-0AA0 30 A/four-quadrant operation 400 V, 6RA8018-6FV62-0AA0 30 A/four-quadrant operation 480 V

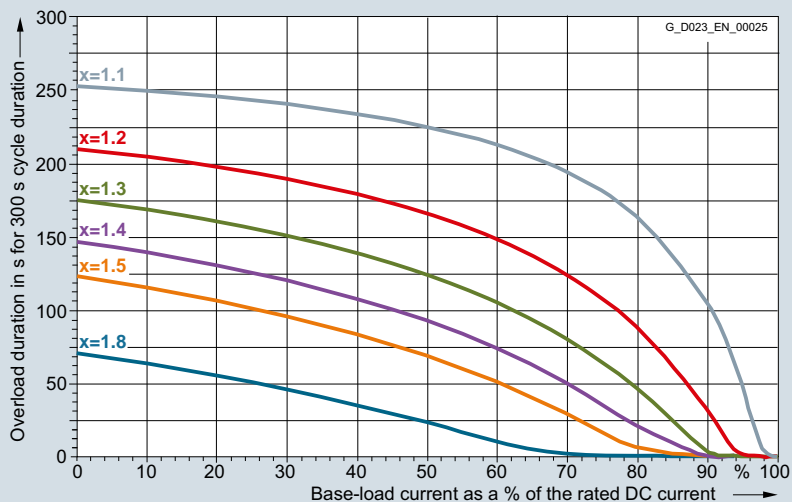


Overload with x-times rated DC current	t_{an} (s)
x=1.1	2081
x=1.2	1356
x=1.3	990
x=1.4	758
x=1.5	593
x=1.8	296

t_{ab} (s) = 2902


6RA8025-6DS22-0AA0 60 A/two-quadrant operation 400 V, 6RA8025-6FS22-0AA0 60 A/two-quadrant operation 480 V, 6RA8025-6GS22-0AA0 60 A/two-quadrant operation 575 V

5


Overview (continued)

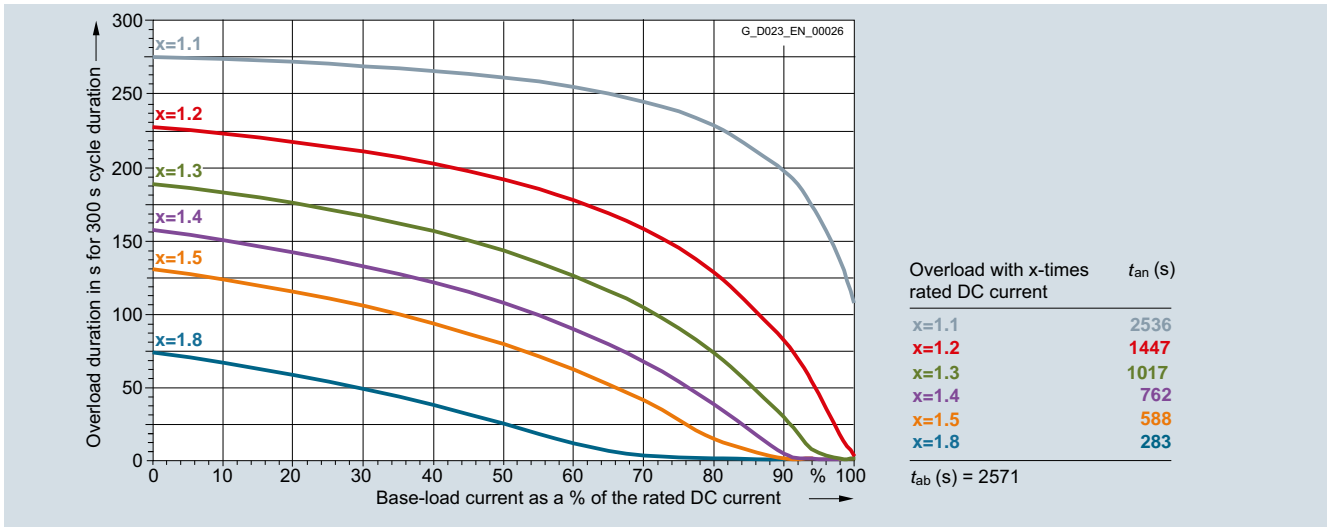

6RA8025-6DV62-0AA0 60 A/four-quadrant operation 400 V, 6RA8025-6FV62-0AA0 60 A/four-quadrant operation 480 V, 6RA8025-6GV62-0AA0 60 A/four-quadrant operation 575 V

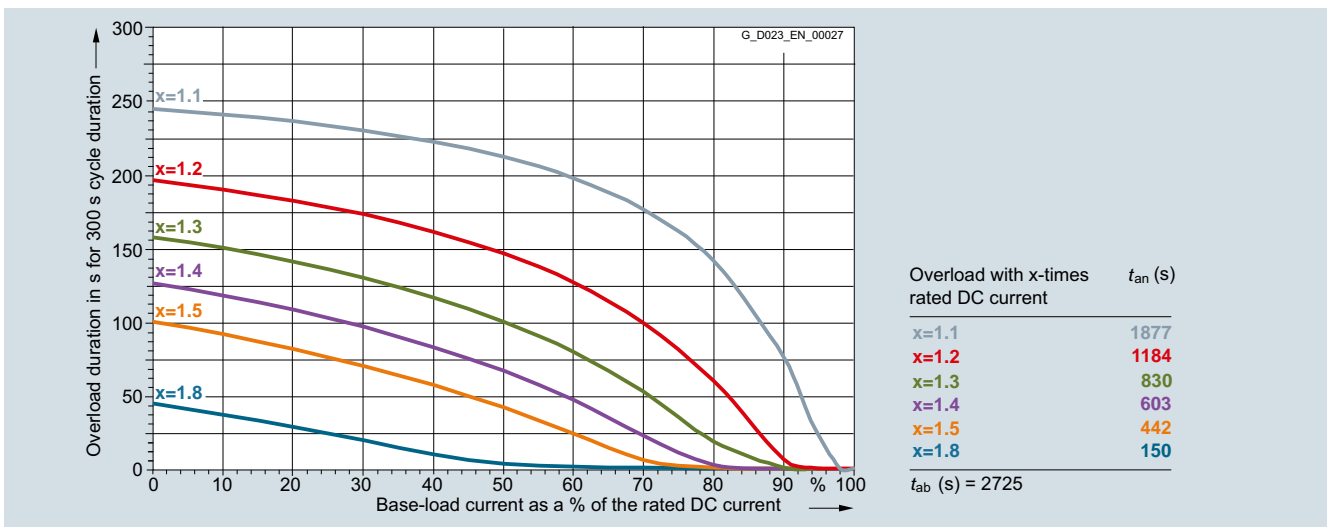

6RA8028-6DS22-0AA0 90 A/two-quadrant operation 400 V, 6RA8028-6FS22-0AA0 90 A/two-quadrant operation 480 V

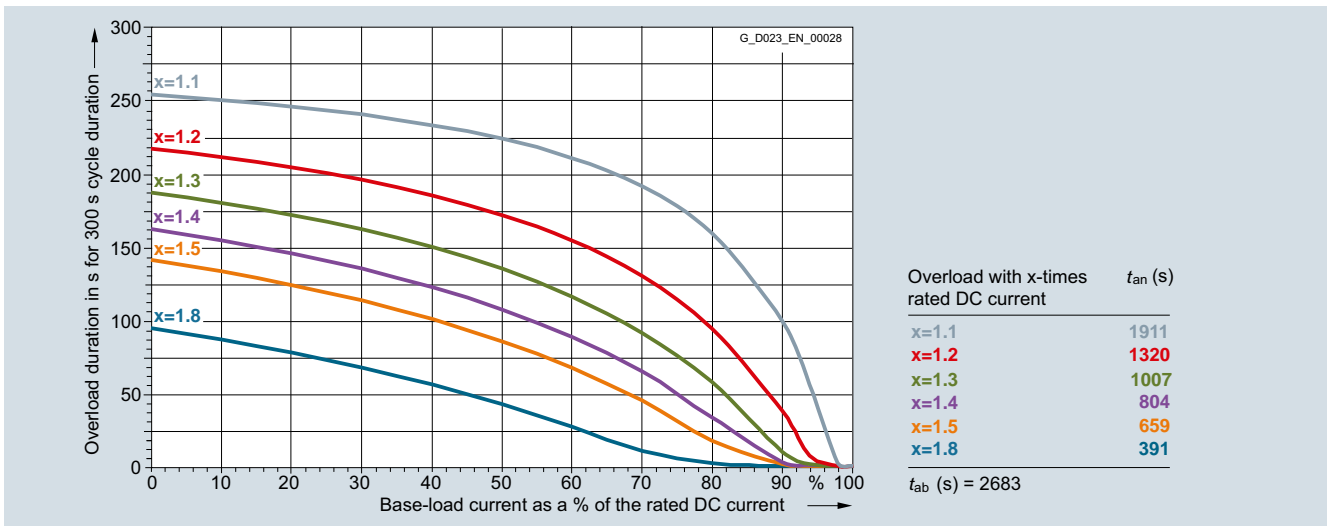


6RA8028-6DV62-0AA0 90 A/four-quadrant operation 400 V, 6RA8028-6FV62-0AA0 90 A/four-quadrant operation 480 V

SINAMICS DCM

Engineering information

Dynamic overload capability


Overview (continued)

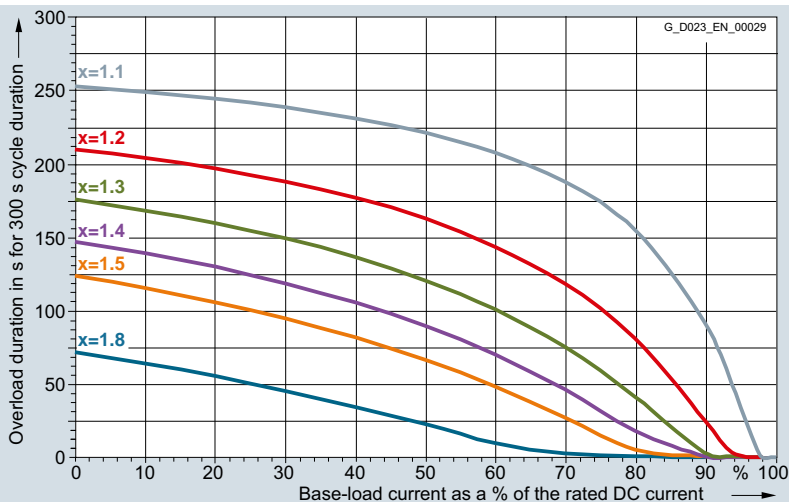

Overload with x-times rated DC current	t_{an} (s)
x=1.1	1994
x=1.2	1319
x=1.3	968
x=1.4	743
x=1.5	583
x=1.8	289

t_{ab} (s) = 2828


6RA8031-6DS22-0AA0 125 A/two-quadrant operation 400 V, 6RA8031-6FS22-0AA0 125 A/two-quadrant operation 480 V, 6RA8031-6GS22-0AA0 125 A/two-quadrant operation 575 V

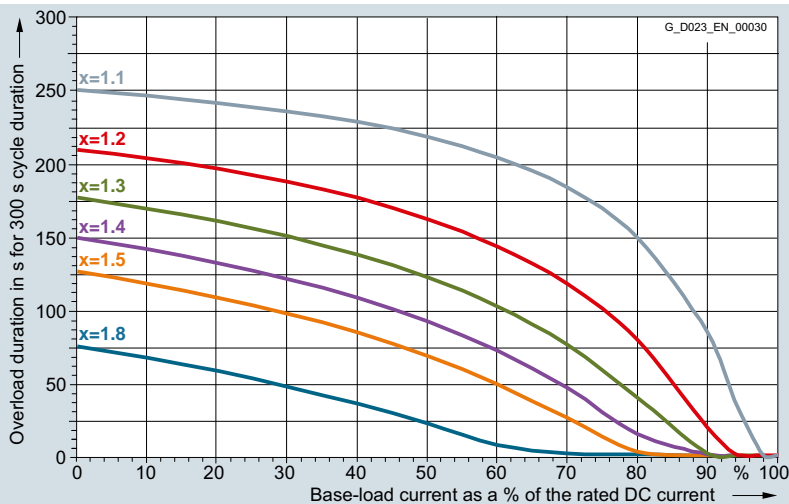

Overload with x-times rated DC current	t_{an} (s)
x=1.1	2159
x=1.2	1452
x=1.3	1078
x=1.4	835
x=1.5	662
x=1.8	343

t_{ab} (s) = 3158

6RA8031-6DV62-0AA0 125 A/four-quadrant operation 400 V, 6RA8031-6FV62-0AA0 125 A/four-quadrant operation 480 V, 6RA8031-6GV62-0AA0 125 A/four-quadrant operation 575 V

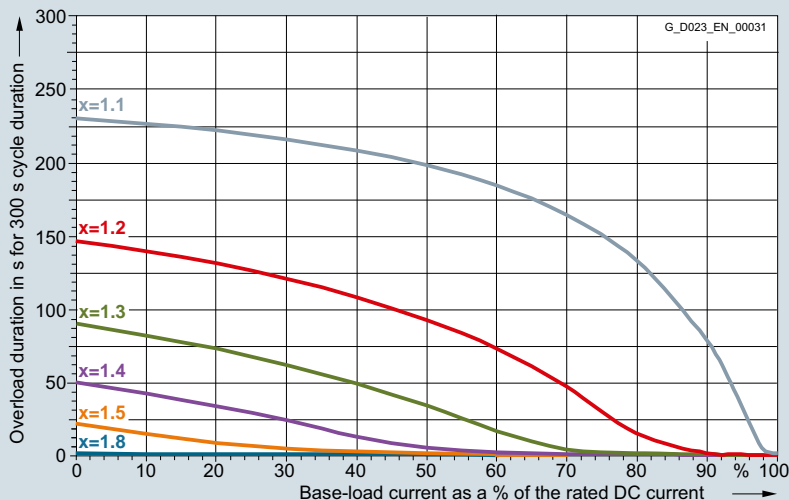


Overload with x-times rated DC current	t_{an} (s)
x=1.1	680
x=1.2	318
x=1.3	167
x=1.4	79
x=1.5	25
x=1.8	1


t_{ab} (s) = 813

6RA8075-6DS22-0AA0 210 A/two-quadrant operation 400 V, 6RA8075-6DV62-0AA0 210 A/four-quadrant operation 400 V, 6RA8075-6FS22-0AA0 210 A/two-quadrant operation 480 V, 6RA8075-6FV62-0AA0 210 A/four-quadrant operation 480 V, 6RA8075-6GS22-0AA0 210 A/two-quadrant operation 575 V, 6RA8075-6GV62-0AA0 210 A/four-quadrant operation 575 V


Overview (continued)

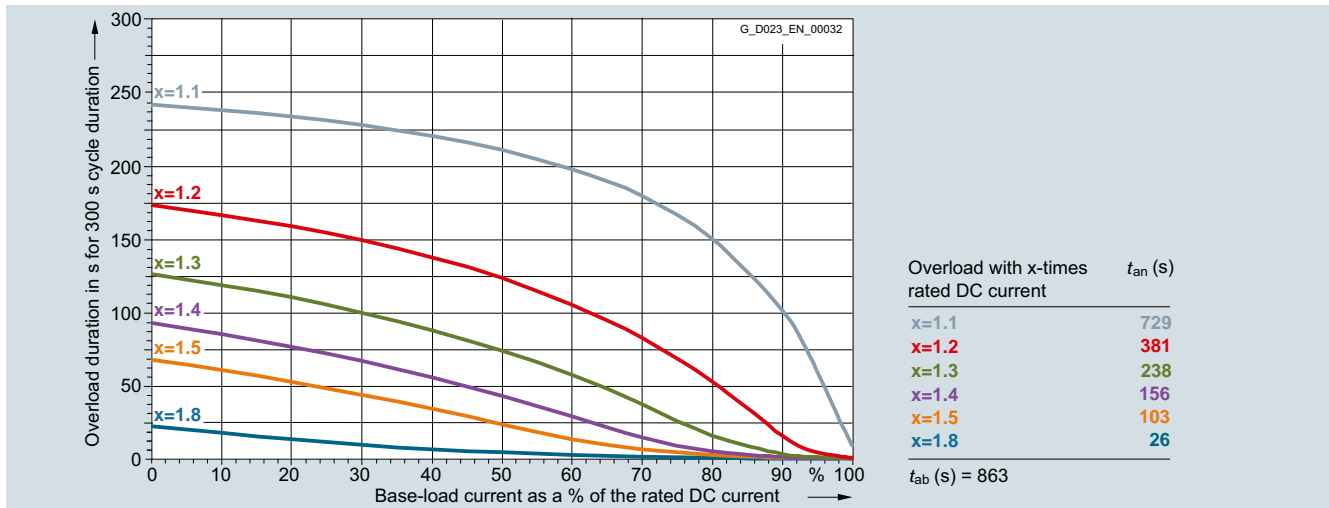

6RA8078-6DS22-0AA0 280 A/two-quadrant operation 400 V, 6RA8078-6DV62-0AA0 280 A/four-quadrant operation 400 V, 6RA8078-6FS22-0AA0 280 A/two-quadrant operation 480 V, 6RA8078-6FV62-0AA0 280 A/four-quadrant operation 480 V

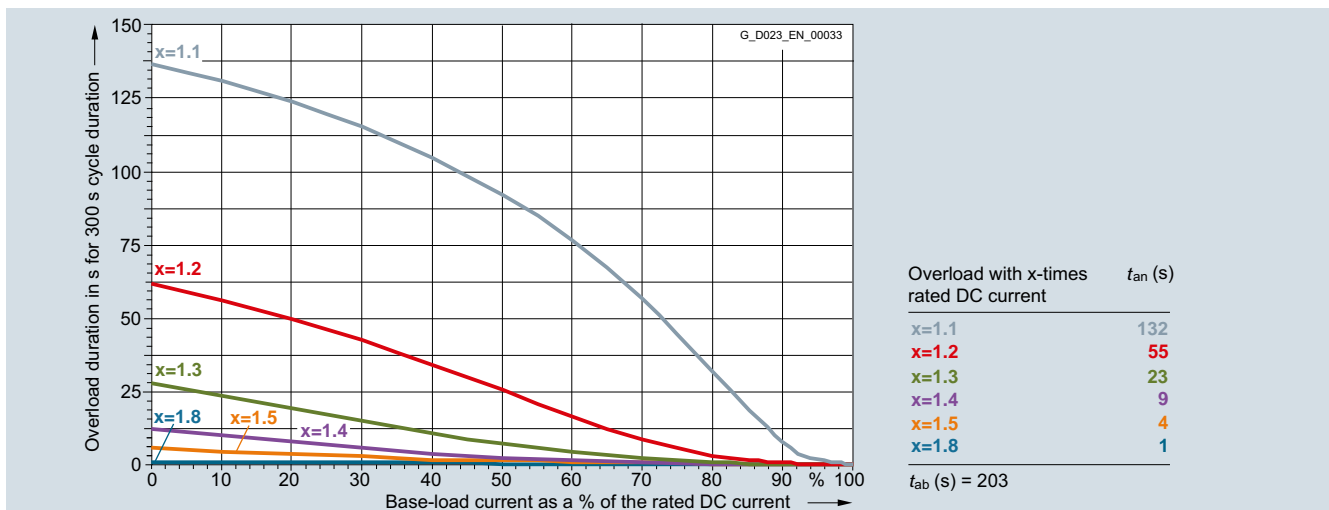

6RA8081-6DS22-0AA0 400 A/two-quadrant operation 400 V, 6RA8081-6GS22-0AA0 400 A/two-quadrant operation 575 V

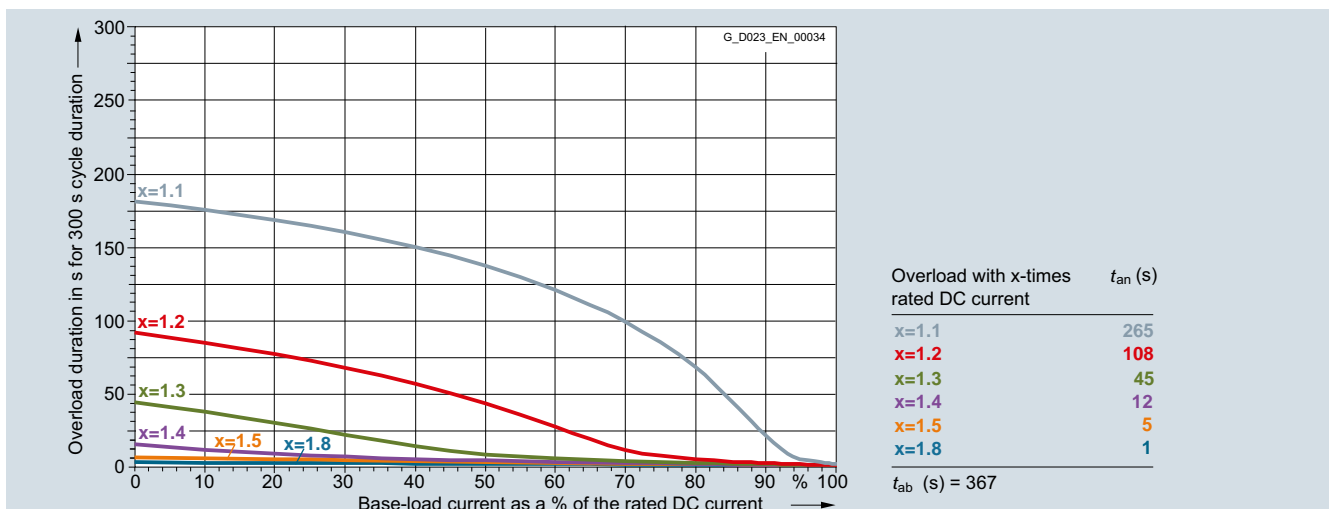

6RA8081-6DV62-0AA0 400 A/four-quadrant operation 400 V, 6RA8081-6GV62-0AA0 400 A/four-quadrant operation 575 V


5

SINAMICS DCM

Engineering information


Dynamic overload capability

Overview (continued)

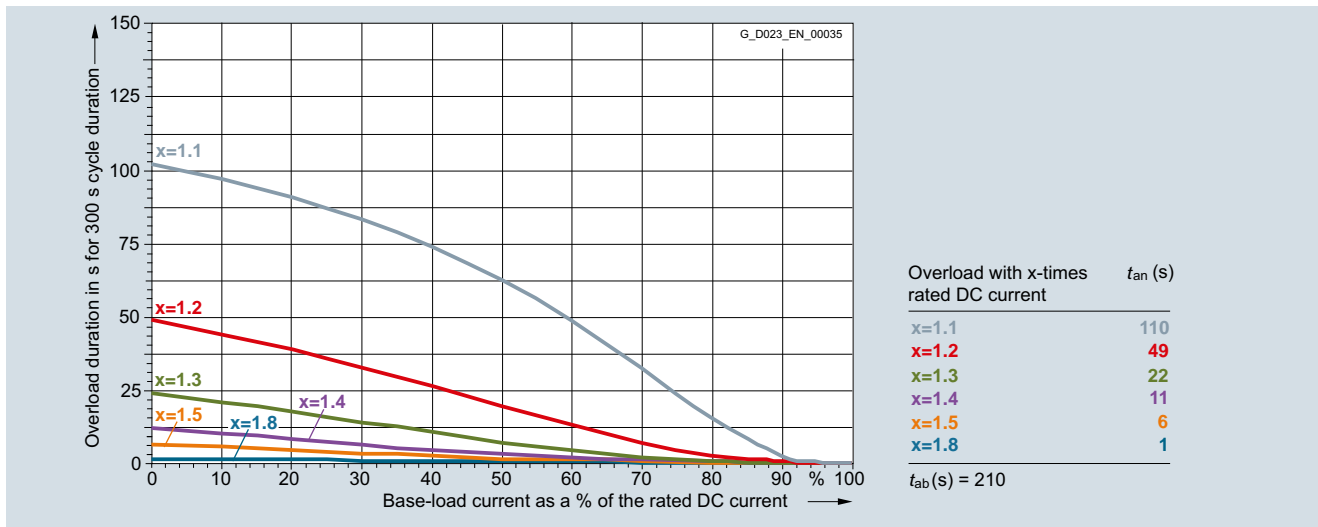


6RA8082-6FS22-0AA0 450 A/two-quadrant operation 480 V, 6RA8082-6FV62-0AA0 450 A/four-quadrant operation 480 V

5

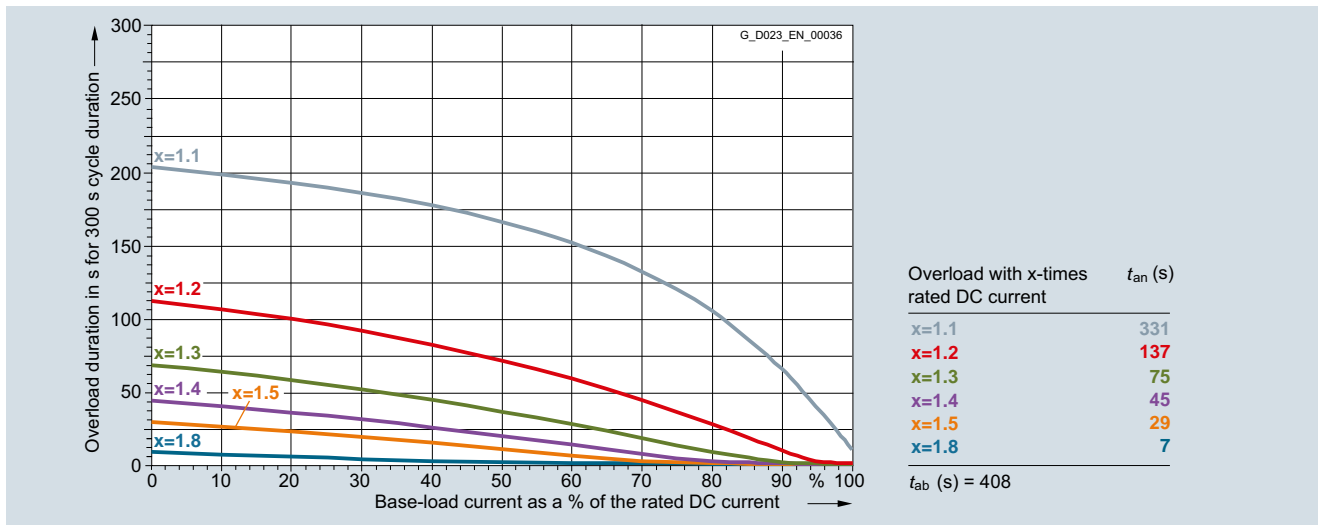


6RA8085-6DS22-0AA0 600 A/two-quadrant operation 400 V, 6RA8085-6FS22-0AA0 600 A/two-quadrant operation 480 V, 6RA8085-6GS22-0AA0 600 A/two-quadrant operation 575 V

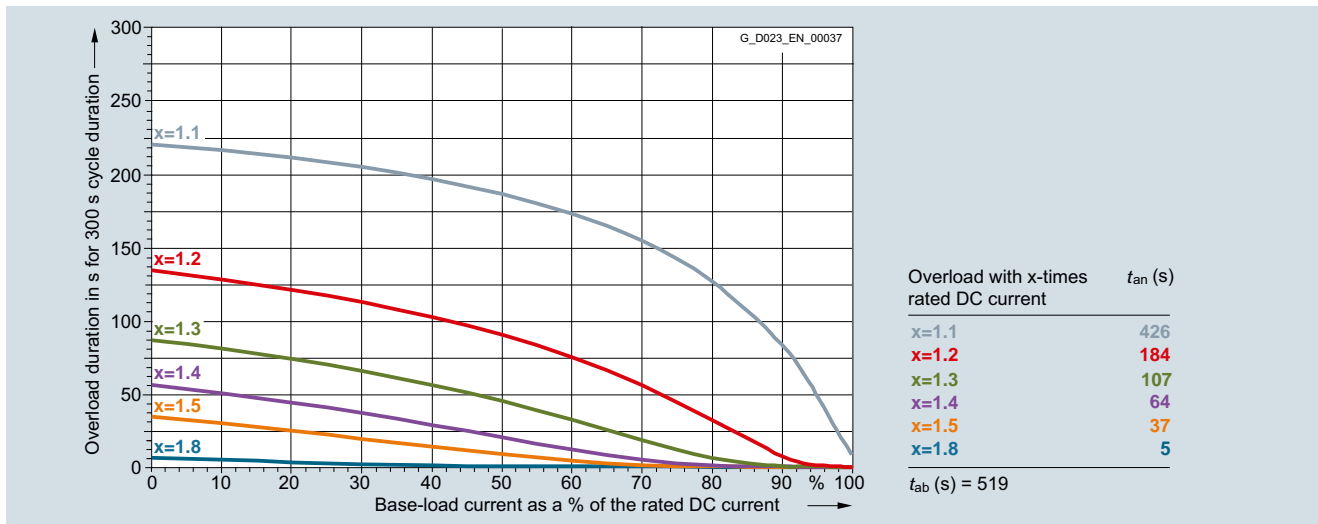

6RA8085-6DV62-0AA0 600 A/four-quadrant operation 400 V, 6RA8085-6FV62-0AA0 600 A/four-quadrant operation 480 V, 6RA8085-6GV62-0AA0 600 A/four-quadrant operation 575 V


Overview (continued)

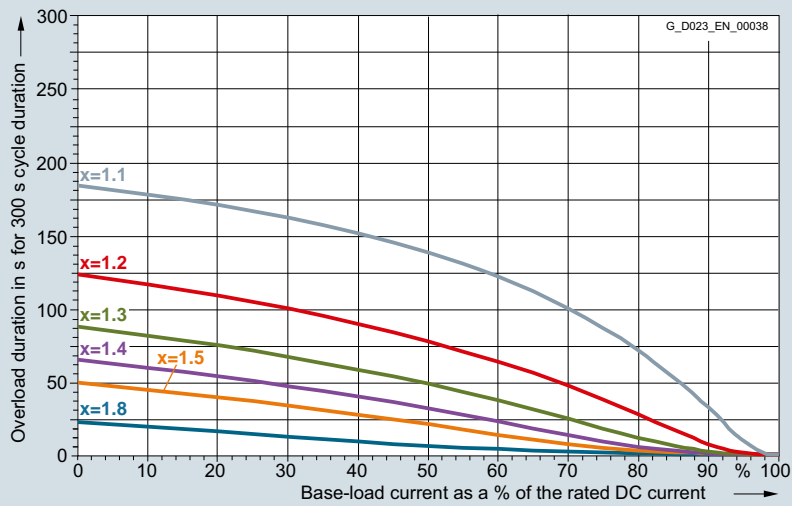

Overload with x-times rated DC current	t_{an} (s)
x=1.1	312
x=1.2	170
x=1.3	109
x=1.4	75
x=1.5	55
x=1.8	22

t_{ab} (s) = 542


6RA8086-6KS22-0AA0 720 A/two-quadrant operation 690 V

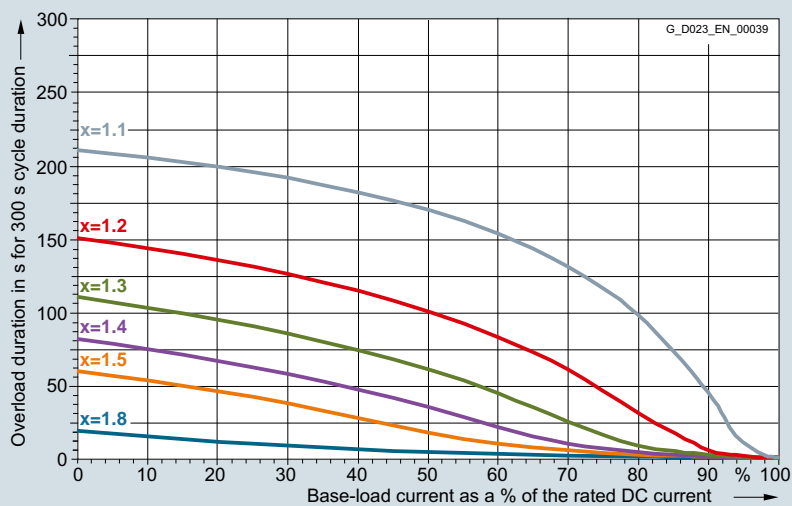

Overload with x-times rated DC current	t_{an} (s)
x=1.1	411
x=1.2	245
x=1.3	164
x=1.4	113
x=1.5	79
x=1.8	20

t_{ab} (s) = 606

6RA8086-6KV62-0AA0 760 A/four-quadrant operation 690 V

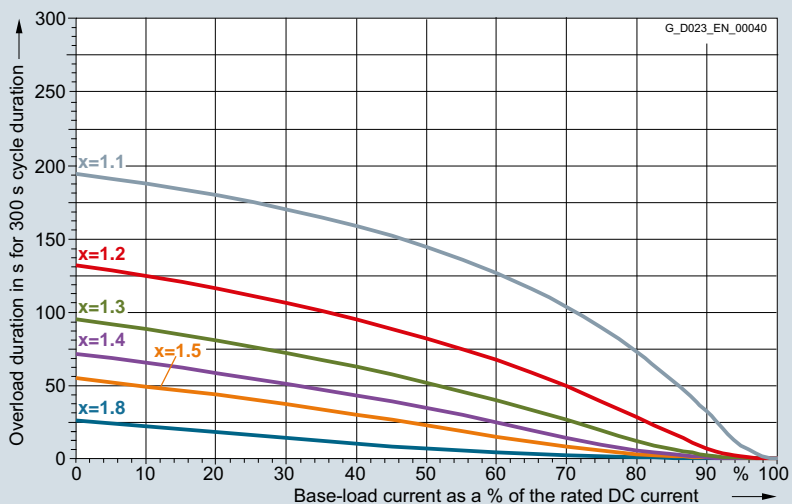

Overload with x-times rated DC current	t_{an} (s)
x=1.1	316
x=1.2	175
x=1.3	114
x=1.4	80
x=1.5	58
x=1.8	25

t_{ab} (s) = 542


6RA8087-6DS22-0AA0 850 A/two-quadrant operation 400 V,
6RA8087-6FS22-0AA0 850 A/two-quadrant operation 480 V

SINAMICS DCM

Engineering information

Dynamic overload capability

Overview (continued)

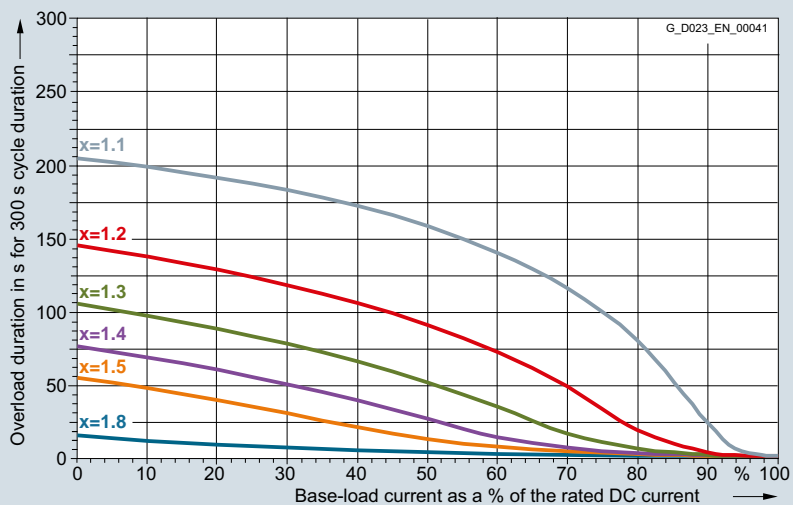


Overload with x-times rated DC current	t_{an} (s)
x=1.1	382
x=1.2	228
x=1.3	151
x=1.4	102
x=1.5	68
x=1.8	13

t_{ab} (s) = 593

6RA8087-6DV62-0AA0 850 A/four-quadrant operation 400 V, 6RA8087-6FV62-0AA0 850 A/four-quadrant operation 480 V, 6RA8087-6GV62-0AA0 850 A/four-quadrant operation 575 V


5

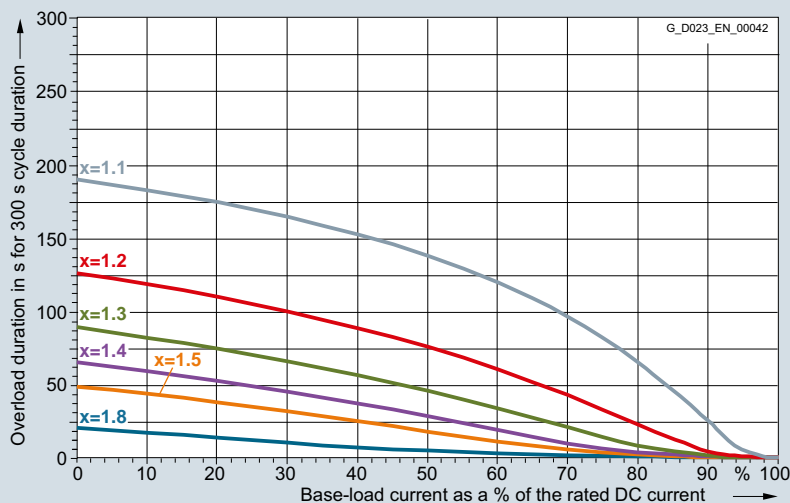

Overload with x-times rated DC current	t_{an} (s)
x=1.1	296
x=1.2	161
x=1.3	102
x=1.4	70
x=1.5	50
x=1.8	19

t_{ab} (s) = 527

6RA8087-6GS22-0AA0 800 A/two-quadrant operation 575 V

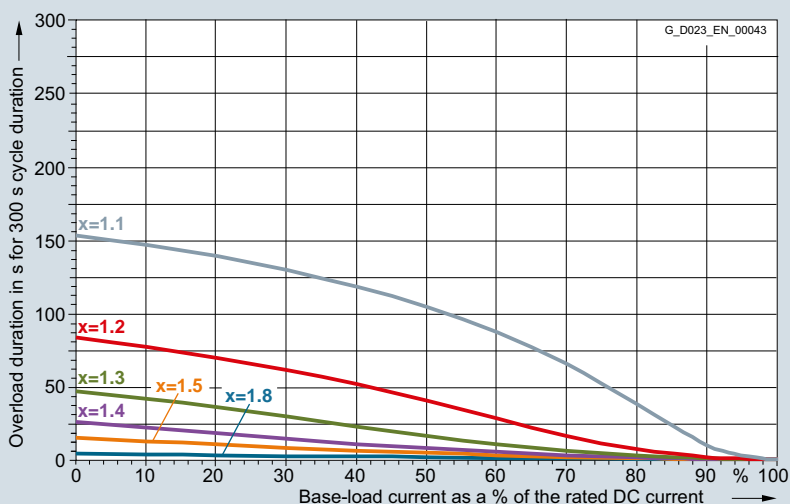


Overload with x-times rated DC current	t_{an} (s)
x=1.1	220
x=1.2	99
x=1.3	50
x=1.4	25
x=1.5	13
x=1.8	4


t_{ab} (s) = 395

6RA8088-6LS22-0AA0 950 A/two-quadrant operation 830 V, 6RA8088-6LV62-0AA0 950 A/four-quadrant operation 830 V


Overview (continued)

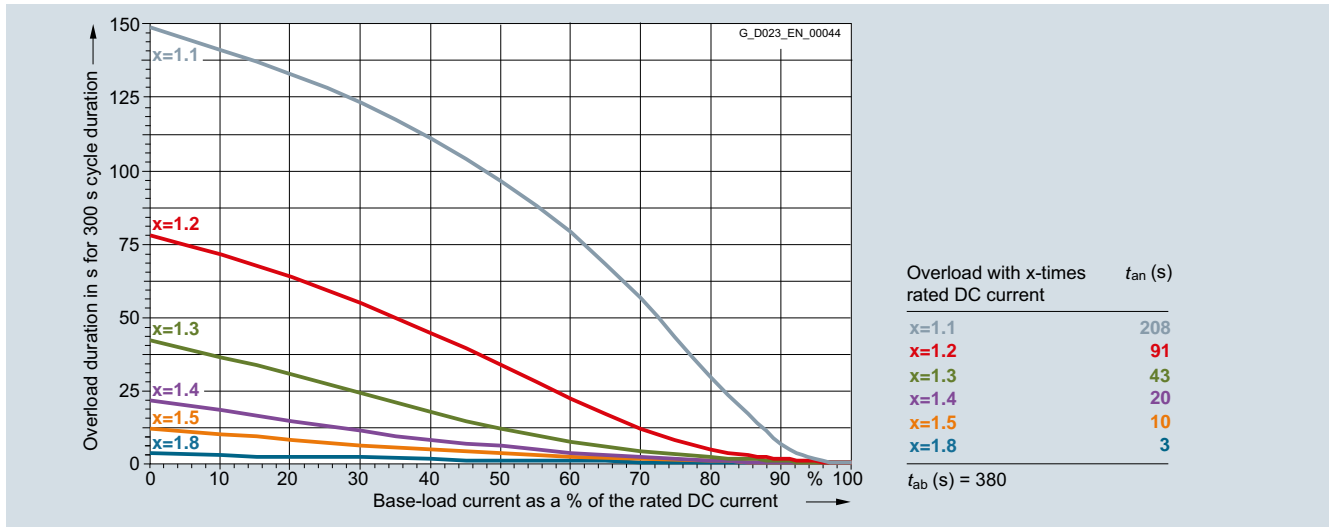

6RA8090-6GS22-0AA0 1100 A/two-quadrant operation 575 V, 6RA8090-6GV62-0AA0 1100 A/four-quadrant operation 575 V

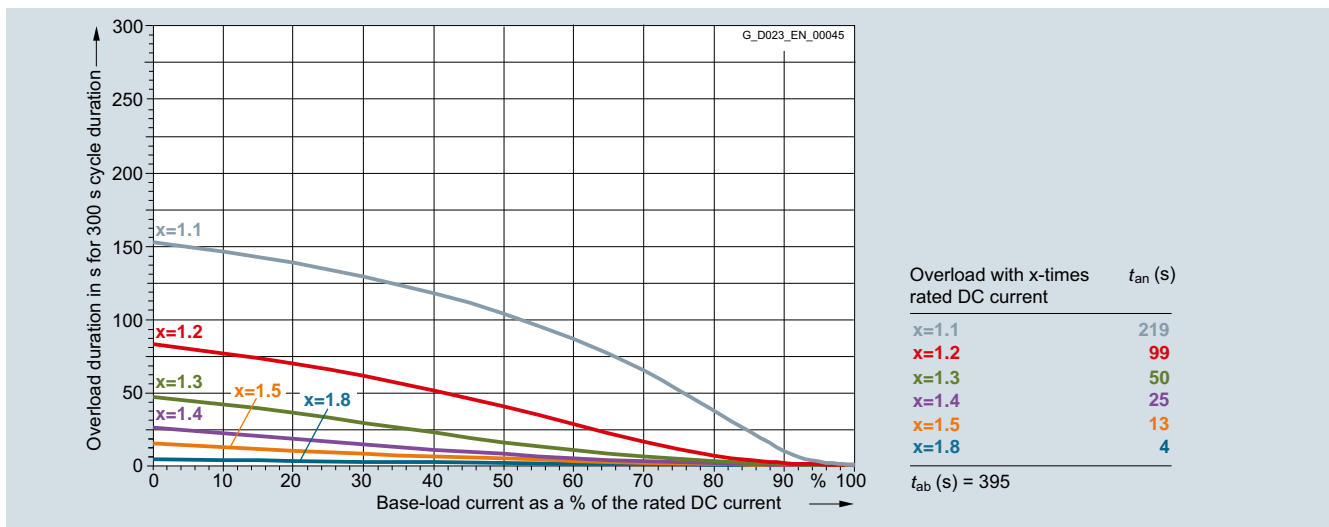

6RA8090-6KS22-0AA0 1000 A/two-quadrant operation 690 V, 6RA8090-6KV62-0AA0 1000 A/four-quadrant operation 690 V

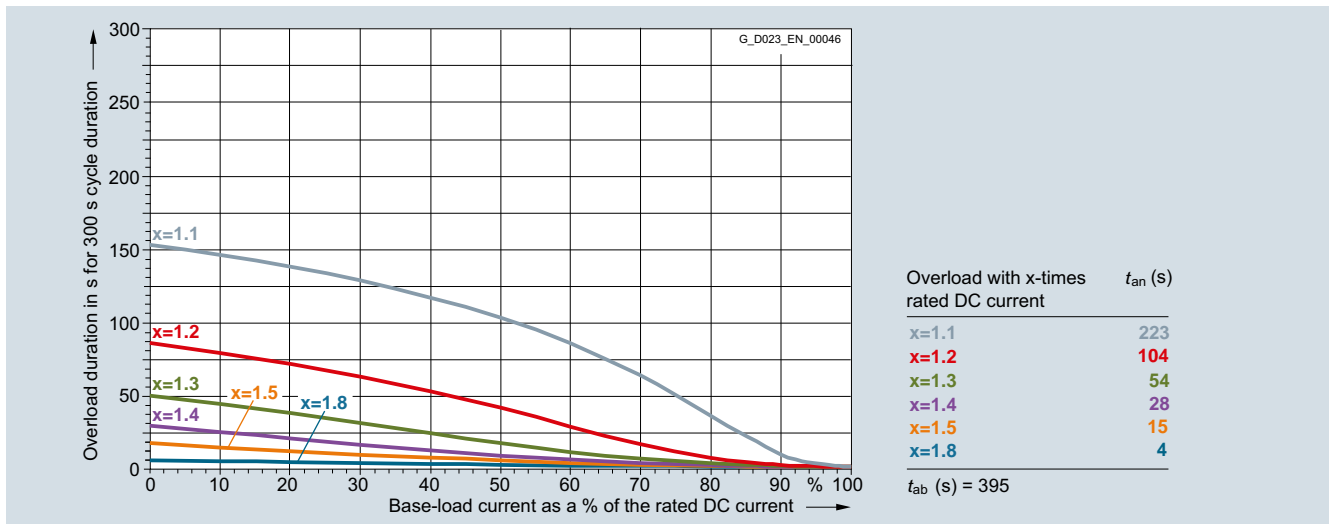

6RA8091-6DS22-0AA0 1200 A/two-quadrant operation 400 V, 6RA8091-6FS22-0AA0 1200 A/two-quadrant operation 480 V, 6RA8091-6FV62-0AA0 1200 A/four-quadrant operation 480 V, 6RA8091-6DV62-0AA0 1200 A/four-quadrant operation 400 V


5

SINAMICS DCM

Engineering information

Dynamic overload capability


Overview (continued)

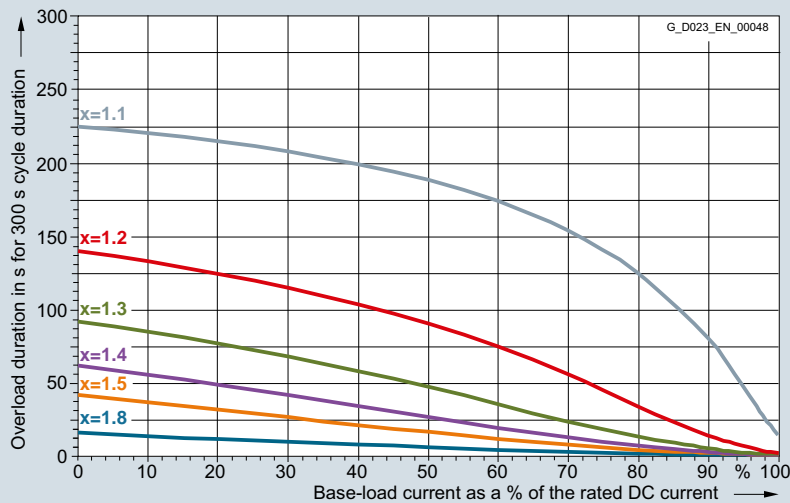

Overload with x-times rated DC current	t_{an} (s)
x=1.1	519
x=1.2	221
x=1.3	123
x=1.4	74
x=1.5	46
x=1.8	15

t_{ab} (s) = 591


6RA8093-4DS22-0AA0 1600 A/two-quadrant operation 400 V, 6RA8093-4DV62-0AA0 1600 A/four-quadrant operation 400 V, 6RA8093-4GS22-0AA0 1600 A/two-quadrant operation 575 V, 6RA8093-4GV62-0AA0 1600 A/four-quadrant operation 575 V

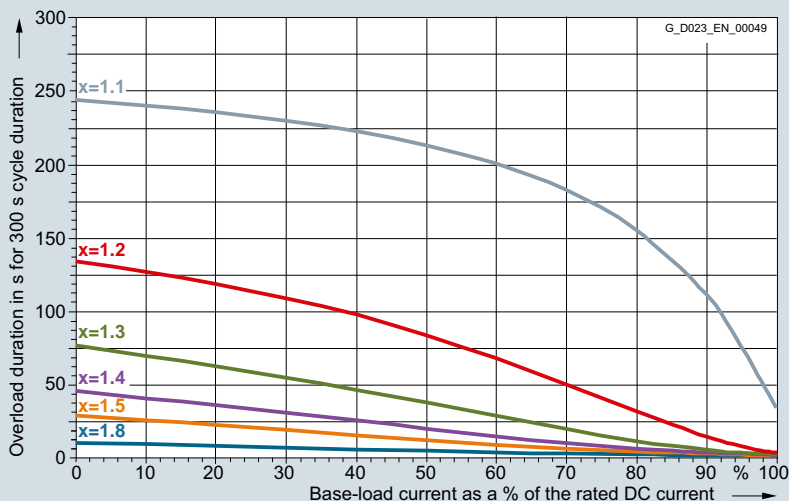

Overload with x-times rated DC current	t_{an} (s)
x=1.1	546
x=1.2	196
x=1.3	92
x=1.4	47
x=1.5	27
x=1.8	8

t_{ab} (s) = 499

6RA8093-4KS22-0AA0 1500 A/two-quadrant operation 690 V, 6RA8093-4KV62-0AA0 1500 A/four-quadrant operation 690 V, 6RA8093-4LS22-0AA0 1500 A/two-quadrant operation 830 V, 6RA8093-4LV62-0AA0 1500 A/four-quadrant operation 830 V

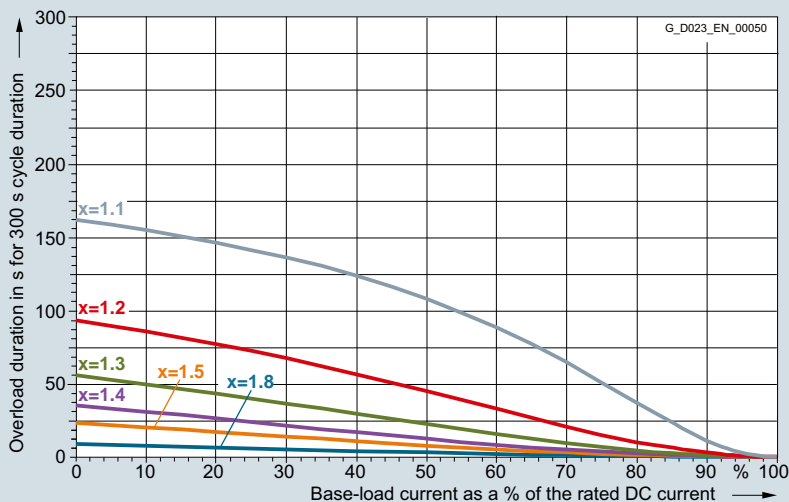


Overload with x-times rated DC current	t_{an} (s)
x=1.1	274
x=1.2	129
x=1.3	66
x=1.4	37
x=1.5	24
x=1.8	8


t_{ab} (s) = 517

6RA8095-4DS22-0AA0 2000 A/two-quadrant operation 400 V, 6RA8095-4DV62-0AA0 2000 A/four-quadrant operation 400 V


Overview (continued)

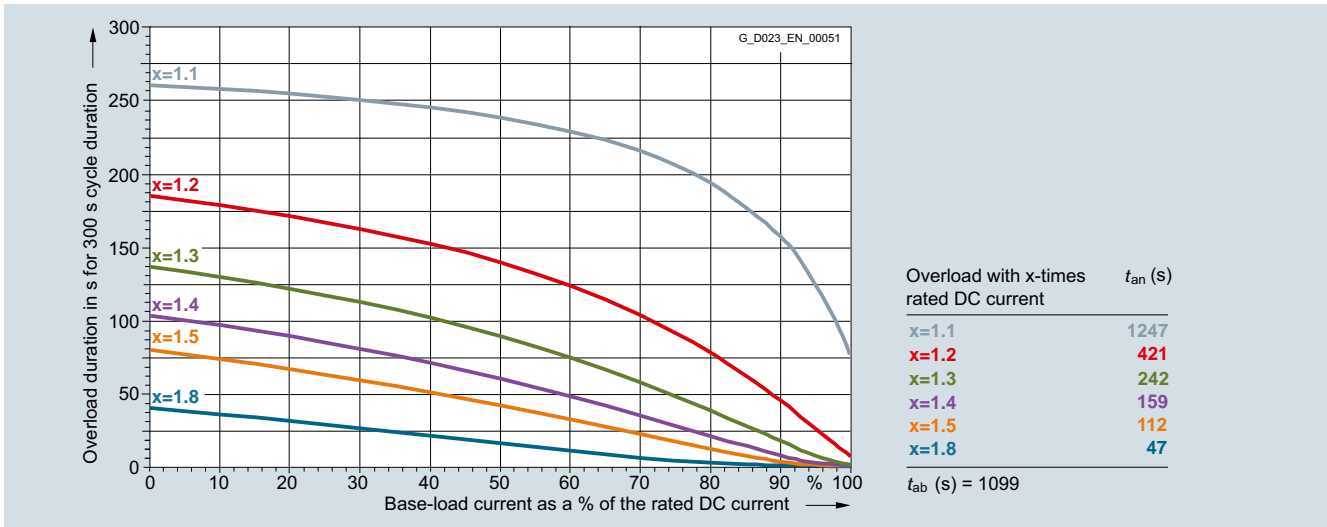

6RA8095-4GS22-0AA0 2000 A/two-quadrant operation 575 V, 6RA8095-4GV62-0AA0 2000 A/four-quadrant operation 575 V

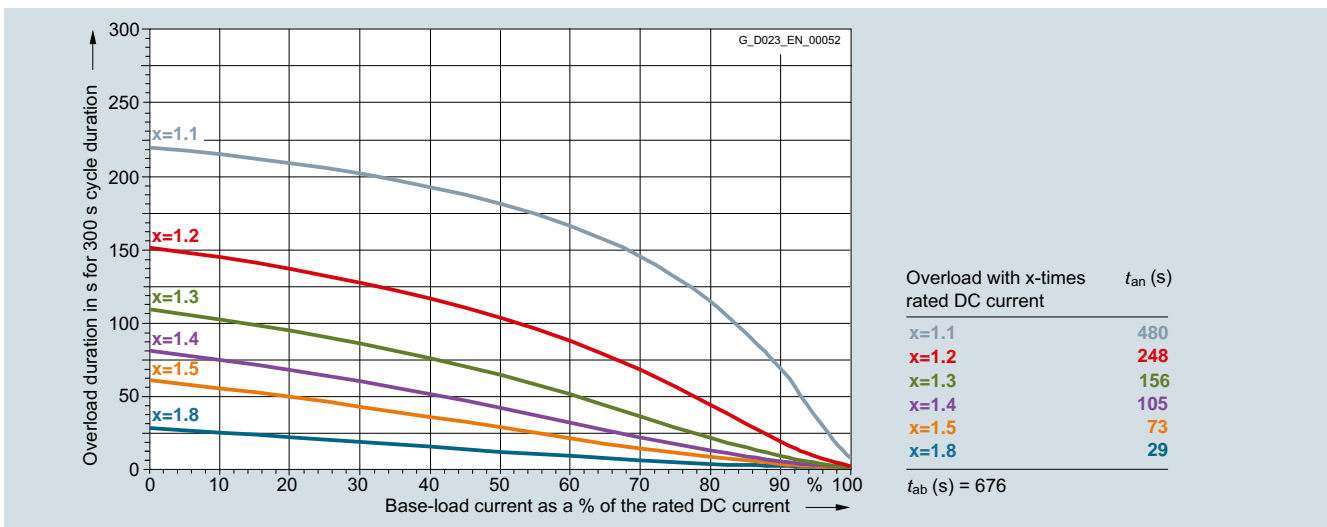

6RA8095-4KS22-0AA0 2000 A/two-quadrant operation 690 V, 6RA8095-4KV62-0AA0 2000 A/four-quadrant operation 690 V

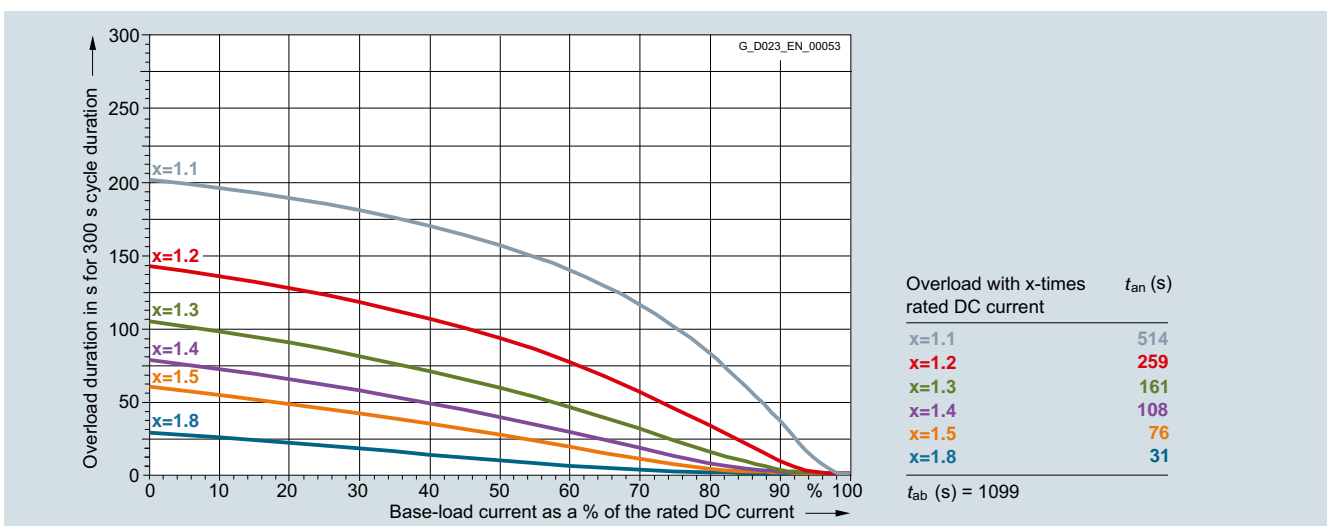


6RA8095-4LS22-0AA0 1900 A/two-quadrant operation 830 V, 6RA8095-4LV62-0AA0 1900 A/four-quadrant operation 830 V

SINAMICS DCM

Engineering information

Dynamic overload capability


Overview (continued)

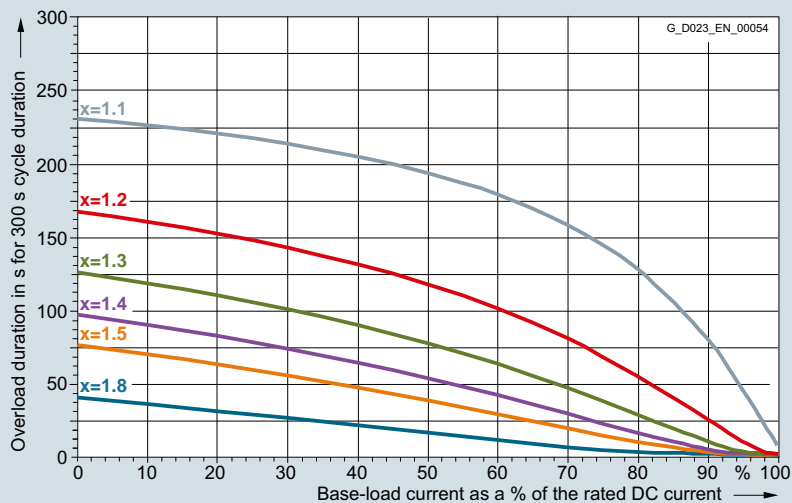

Overload with x-times rated DC current	t_{an} (s)
x=1.1	754
x=1.2	343
x=1.3	211
x=1.4	144
x=1.5	104
x=1.8	46

t_{ab} (s) = 1118


6RA8096-4GS22-0AA0 2200 A/two-quadrant operation 575 V, 6RA8096-4GV62-0AA0 2200 A/four-quadrant operation 575 V

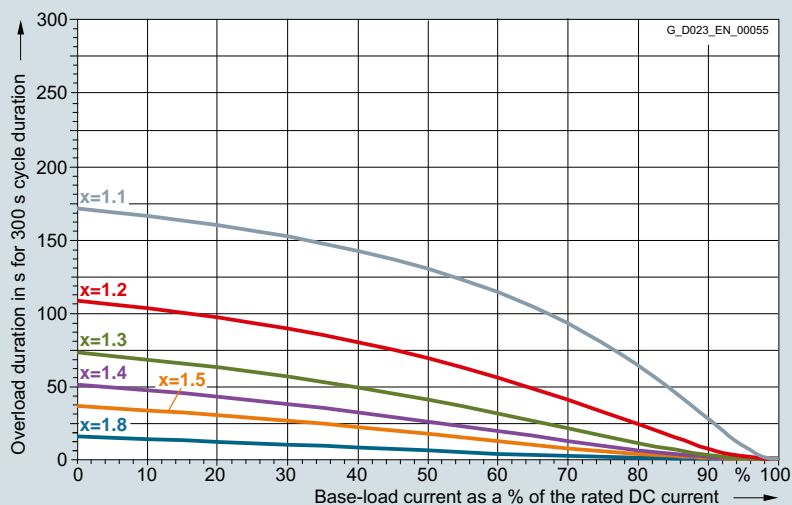

Overload with x-times rated DC current	t_{an} (s)
x=1.1	259
x=1.2	140
x=1.3	86
x=1.4	56
x=1.5	38
x=1.8	15

t_{ab} (s) = 465

6RA8096-4MS22-0AA0 2200 A/two-quadrant operation 950 V, 6RA8096-4MV62-0AA0 2200 A/four-quadrant operation 950 V

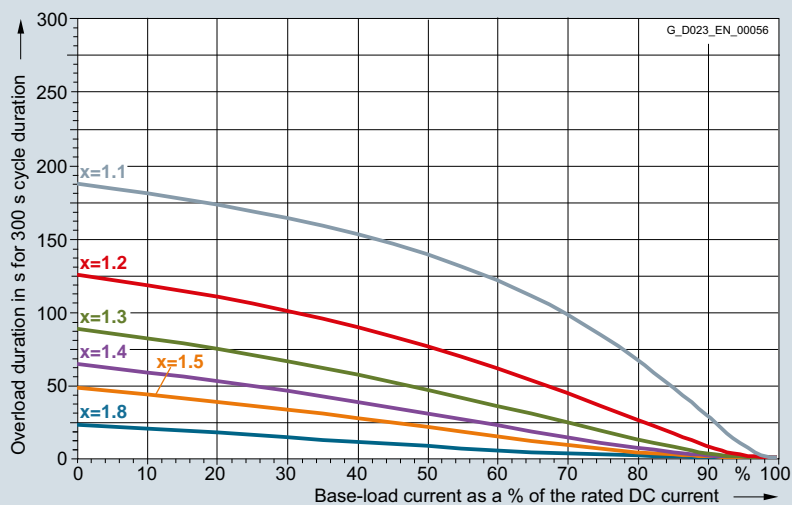


Overload with x-times rated DC current	t_{an} (s)
x=1.1	285
x=1.2	162
x=1.3	105
x=1.4	72
x=1.5	51
x=1.8	22

t_{ab} (s) = 465


6RA8097-4GS22-0AA0 2800 A/two-quadrant operation 575 V, 6RA8097-4GV62-0AA0 2800 A/four-quadrant operation 575 V

5

Overview (continued)

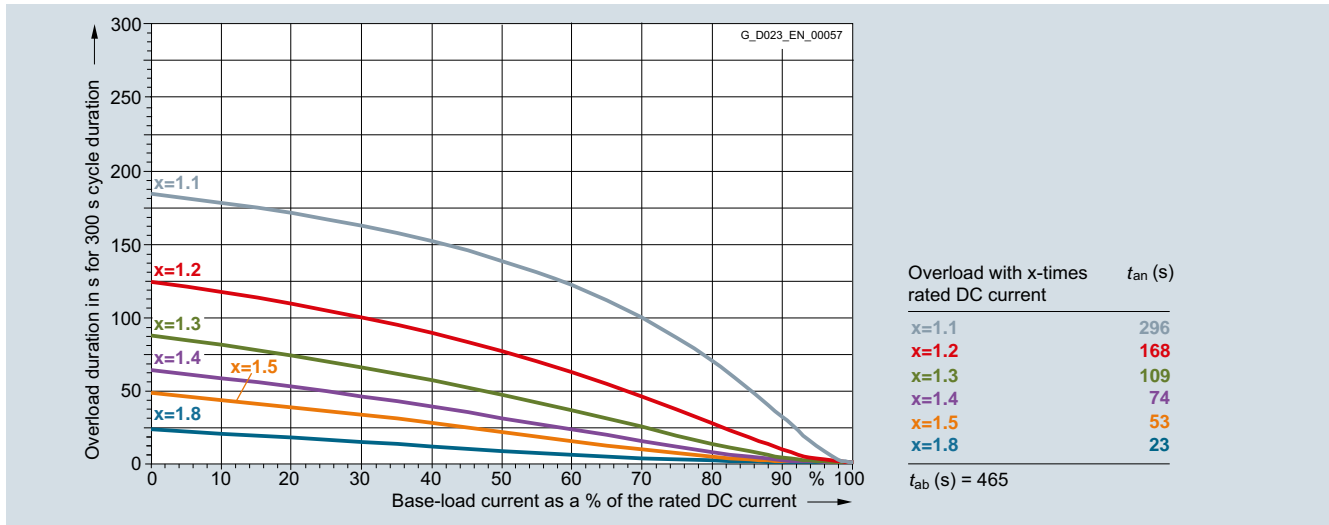

6RA8097-4KS22-0AA0 2600 A/two-quadrant operation 690 V, 6RA8097-4KV62-0AA0 2600 A/four-quadrant operation 690 V

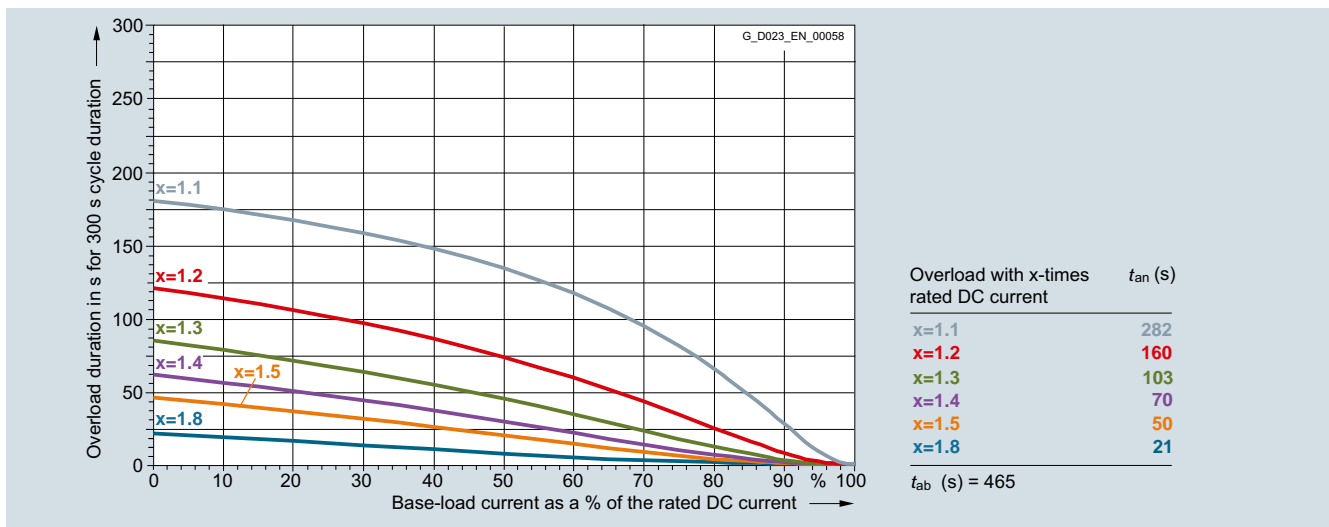

6RA8098-4DS22-0AA0 3000 A/two-quadrant operation 400 V, 6RA8098-4DV62-0AA0 3000 A/four-quadrant operation 400 V

Load classes

In order to be able to adapt the SINAMICS DC MASTER as simply as possible to the load profile of the driven machine, in addition to the individual dimensioning using the limiting characteristics of the dynamic overload capability, these can also be dimensioned using pre-selected load cycles that are simple to parameterize.

Note:

SINAMICS DC MASTER does not monitor whether the load class – set using parameters – is maintained. If the power section permits it, the unit can operate for overload durations in excess of those defined by the load class. This means that the driven machine of the mechanical system is not protected against overload!

The overload duration that is actually permitted for the power section in question is always longer than the duration defined by the load class. SINAMICS DC MASTER monitors whether the overload duration that is actually permitted for the power section is being maintained.

More information

For further information, please go to the following website address:






<http://support.automation.siemens.com/WW/view/en/81714558>

SINAMICS DCM

Engineering information

Dynamic overload capability

Overview (continued)

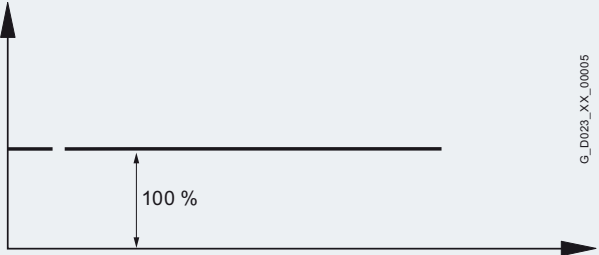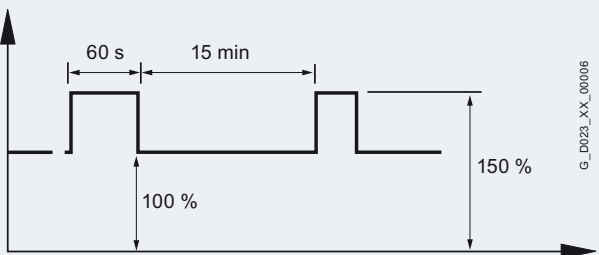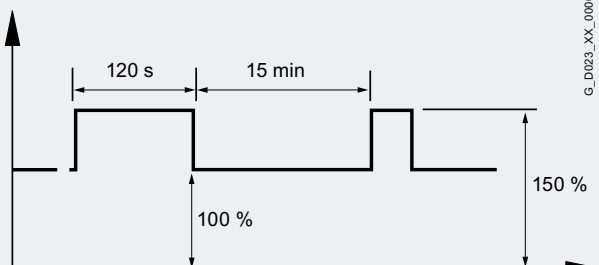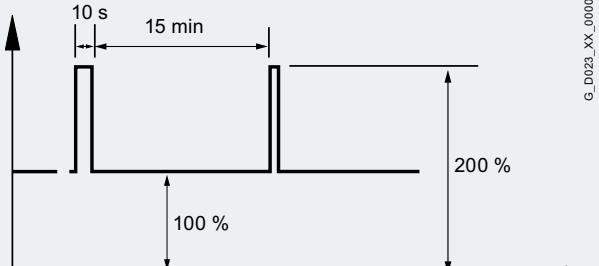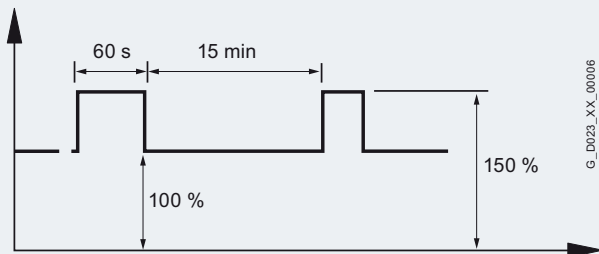Load class (parameter)	Load for the converter	Load cycle
DC I	$I_{DC I}$ continuous (I_{dN})	 <p style="text-align: right;">G_D023_XX_00005</p>
DC II	$I_{DC II}$ for 15 min and $1.5 \times I_{DC II}$ for 60 s	 <p style="text-align: right;">G_D023_XX_00006</p>
DC III	$I_{DC III}$ for 15 min and $1.5 \times I_{DC III}$ for 120 s	 <p style="text-align: right;">G_D023_XX_00007</p>
DC IV	$I_{DC IV}$ for 15 min and $2 \times I_{DC IV}$ for 10 s	 <p style="text-align: right;">G_D023_XX_00008</p>
US rating	I_{US} for 15 min and $1.5 \times I_{US}$ for 60 s Note: With this setting, for all unit types, an ambient and/or coolant temperature of 45 °C is permissible.	 <p style="text-align: right;">G_D023_XX_00006</p>

5

Overview (continued)

Duty cycles for two-quadrant operation

Supply voltage V	SINAMICS DC MASTER converter Type	T_U °C	Duty cycles								US rating $T_U = 45\text{ °C}$	
			DC I Con- tinuous A	DC II 15 min 100 % A	60 s 150 % A	DC III 15 min 100 % A	120 s 150 % A	DC IV 15 min 100 % A	10 s 200 % A	15 min 100 % A	60 s 150 % A	
400 3 AC	6RA8025-6DS22-0AA0	45	60	51.4	77.1	50.2	75.3	46.4	92.8	51.4	77.1	
	6RA8028-6DS22-0AA0	45	90	74.4	111	72.8	109	65.4	130	74.4	111	
	6RA8031-6DS22-0AA0	45	125	106	159	103	155	96.3	192	106	159	
	6RA8075-6DS22-0AA0	40	210	164	247	161	242	136	273	157	236	
	6RA8078-6DS22-0AA0	40	280	226	340	219	328	201	402	215	323	
	6RA8081-6DS22-0AA0	40	400	290	435	282	423	244	488	278	417	
	6RA8085-6DS22-0AA0	40	600	462	693	446	669	413	826	443	665	
	6RA8087-6DS22-0AA0	40	850	652	978	622	933	609	1219	619	929	
	6RA8091-6DS22-0AA0	40	1200	884	1326	857	1286	768	1537	842	1263	
	6RA8093-4DS22-0AA0	40	1600	1255	1883	1213	1819	1139	2279	1190	1785	
	6RA8095-4DS22-0AA0	40	2000	1477	2216	1435	2152	1326	2653	1404	2106	
	6RA8098-4DS22-0AA0	40	3000	2288	3432	2189	3283	2164	4328	2178	3267	
480 3 AC	6RA8025-6FS22-0AA0	45	60	51.4	77.1	50.2	75.3	46.4	92.8	51.4	77.1	
	6RA8028-6FS22-0AA0	45	90	74.4	111	72.8	109	65.4	130	74.4	111	
	6RA8031-6FS22-0AA0	45	125	106	159	103	155	96.3	192	106	159	
	6RA8075-6FS22-0AA0	40	210	164	247	161	242	136	273	157	236	
	6RA8078-6FS22-0AA0	40	280	226	340	219	328	201	402	215	323	
	6RA8082-6FS22-0AA0	40	450	320	480	311	466	274	548	306	460	
	6RA8085-6FS22-0AA0	40	600	462	693	446	669	413	826	443	665	
	6RA8087-6FS22-0AA0	40	850	652	978	622	933	609	1219	619	929	
	6RA8091-6FS22-0AA0	40	1200	884	1326	857	1286	768	1537	842	1263	
575 3 AC	6RA8025-6GS22-0AA0	45	60	51.4	77.1	50.2	75.3	46.4	92.8	51.4	77.1	
	6RA8031-6GS22-0AA0	45	125	106	159	103	155	96.3	192	106	159	
	6RA8075-6GS22-0AA0	40	210	164	247	161	242	136	273	157	236	
	6RA8081-6GS22-0AA0	40	400	290	435	282	423	244	488	278	417	
	6RA8085-6GS22-0AA0	40	600	462	693	446	669	413	826	443	665	
	6RA8087-6GS22-0AA0	40	800	607	911	581	872	559	1118	578	867	
	6RA8090-6GS22-0AA0	40	1100	804	1207	782	1173	689	1379	766	1150	
	6RA8093-4GS22-0AA0	40	1600	1255	1883	1213	1819	1139	2279	1190	1785	
	6RA8095-4GS22-0AA0	40	2000	1663	2494	1591	2386	1568	3136	1569	2354	
	6RA8096-4GS22-0AA0	40	2200	1779	2669	1699	2549	1697	3394	1678	2517	
	6RA8097-4GS22-0AA0	40	2800	2136	3204	2044	3066	2022	4044	2024	3036	
	690 3 AC	6RA8086-6KS22-0AA0	40	720	553	829	527	791	515	1031	525	788
6RA8090-6KS22-0AA0		40	1000	737	1105	715	1072	639	1279	702	1053	
6RA8093-4KS22-0AA0		40	1500	1171	1757	1140	1710	1036	2073	1116	1674	
6RA8095-4KS22-0AA0		40	2000	1589	2383	1522	2283	1505	3011	1503	2255	
6RA8097-4KS22-0AA0		40	2600	1992	2989	1906	2859	1887	3774	1876	2815	
830 3 AC	6RA8088-6LS22-0AA0	40	950	700	1051	679	1019	607	1215	667	1001	
	6RA8093-4LS22-0AA0	40	1500	1171	1757	1140	1710	1036	2073	1116	1674	
	6RA8095-4LS22-0AA0	40	1900	1485	2228	1421	2132	1396	2793	1414	2121	
950 3 AC	6RA8096-4MS22-0AA0	40	2200	1674	2511	1603	2404	1570	3141	1588	2382	

SINAMICS DCM

Engineering information

Dynamic overload capability

Overview (continued)

Duty cycles for four-quadrant operation

Supply voltage V	SINAMICS DC MASTER converter Type	T_U °C	Duty cycles								US rating $T_U = 45\text{ °C}$	
			DC I Con- tinuous A	DC II 15 min 100 % A	60 s 150 % A	DC III 15 min 100 % A	120 s 150 % A	DC IV 15 min 100 % A	10 s 200 % A	15 min 100 % A	60 s 150 % A	
400 3 AC	6RA8013-6DV62-0AA0	45	15	13.9	20.8	13.5	20.2	12.6	25.2	13.9	20.8	
	6RA8018-6DV62-0AA0	45	30	24.9	37.3	24.2	36.3	22.4	44.8	24.9	37.3	
	6RA8025-6DV62-0AA0	45	60	53.1	79.6	51.8	77.7	47.2	94.4	53.1	79.6	
	6RA8028-6DV62-0AA0	45	90	78.2	117	76	114	72.2	144	78.2	117	
	6RA8031-6DV62-0AA0	45	125	106	159	103	155	95.4	190	106	159	
	6RA8075-6DV62-0AA0	40	210	164	247	161	242	136	273	157	236	
	6RA8078-6DV62-0AA0	40	280	226	340	219	328	201	402	215	323	
	6RA8081-6DV62-0AA0	40	400	300	450	292	438	247	494	285	428	
	6RA8085-6DV62-0AA0	40	600	470	706	453	680	410	820	450	675	
	6RA8087-6DV62-0AA0	40	850	658	987	634	951	579	1159	626	939	
	6RA8091-6DV62-0AA0	40	1200	884	1326	857	1286	768	1537	842	1263	
	6RA8093-4DV62-0AA0	40	1600	1255	1883	1213	1819	1139	2279	1190	1785	
	6RA8095-4DV62-0AA0	40	2000	1477	2216	1435	2152	1326	2653	1404	2106	
6RA8098-4DV62-0AA0	40	3000	2288	3432	2189	3283	2164	4328	2178	3267		
480 3 AC	6RA8013-6FV62-0AA0	45	15	13.9	20.8	13.5	20.2	12.6	25.2	13.9	20.8	
	6RA8018-6FV62-0AA0	45	30	24.9	37.3	24.2	36.3	22.4	44.8	24.9	37.3	
	6RA8025-6FV62-0AA0	45	60	53.1	79.6	51.8	77.7	47.2	94.4	53.1	79.6	
	6RA8028-6FV62-0AA0	45	90	78.2	117	76	114	72.2	144	78.2	117	
	6RA8031-6FV62-0AA0	45	125	106	159	103	155	95.4	190	106	159	
	6RA8075-6FV62-0AA0	40	210	164	247	161	242	136	273	157	236	
	6RA8078-6FV62-0AA0	40	280	226	340	219	328	201	402	215	323	
	6RA8082-6FV62-0AA0	40	450	320	480	311	466	274	548	306	460	
	6RA8085-6FV62-0AA0	40	600	470	706	453	680	410	820	450	675	
	6RA8087-6FV62-0AA0	40	850	658	987	634	951	579	1159	626	939	
	6RA8091-6FV62-0AA0	40	1200	884	1326	857	1286	768	1537	842	1263	
	575 3 AC	6RA8025-6GV62-0AA0	45	60	53.1	79.6	51.8	77.7	47.2	94.4	53.1	79.6
		6RA8031-6GV62-0AA0	45	125	106	159	103	155	95.4	190	106	159
6RA8075-6GV62-0AA0		40	210	164	247	161	242	136	273	157	236	
6RA8081-6GV62-0AA0		40	400	300	450	292	438	247	494	285	428	
6RA8085-6GV62-0AA0		40	600	470	706	453	680	410	820	450	675	
6RA8087-6GV62-0AA0		40	850	658	987	634	951	579	1159	626	939	
6RA8090-6GV62-0AA0		40	1100	804	1207	782	1173	689	1379	766	1150	
6RA8093-4GV62-0AA0		40	1600	1255	1883	1213	1819	1139	2279	1190	1785	
6RA8095-4GV62-0AA0		40	2000	1663	2494	1591	2386	1568	3136	1569	2354	
6RA8096-4GV62-0AA0		40	2200	1779	2669	1699	2549	1697	3394	1678	2517	
6RA8097-4GV62-0AA0		40	2800	2136	3204	2044	3066	2022	4044	2024	3036	
690 3 AC		6RA8086-6KV62-0AA0	40	760	598	898	575	863	532	1065	569	853
		6RA8090-6KV62-0AA0	40	1000	737	1105	715	1072	639	1279	702	1053
	6RA8093-4KV62-0AA0	40	1500	1171	1757	1140	1710	1036	2073	1116	1674	
	6RA8095-4KV62-0AA0	40	2000	1589	2383	1522	2283	1505	3011	1503	2255	
	6RA8097-4KV62-0AA0	40	2600	1992	2989	1906	2859	1887	3774	1876	2815	
830 3 AC	6RA8088-6LV62-0AA0	40	950	700	1051	679	1019	607	1215	667	1001	
	6RA8093-4LV62-0AA0	40	1500	1171	1757	1140	1710	1036	2073	1116	1674	
	6RA8095-4LV62-0AA0	40	1900	1485	2228	1421	2132	1396	2793	1414	2121	
950 3 AC	6RA8096-4MV62-0AA0	40	2200	1674	2511	1603	2404	1570	3141	1588	2382	

Overview

Parallel connection of SINAMICS DC MASTER units

SINAMICS DC MASTER units can be connected in parallel to increase the power rating.
The following secondary conditions must be fulfilled:

The hardware and plug connectors necessary to transmit the firing pulses and to establish the higher-level communication are provided on the CUD.

A maximum of 6 units can be connected in parallel. When connecting several units in parallel, the master unit should be positioned centrally due to the signal runtimes. Maximum cable length of the parallel-connection interface cable between master and slave units at each end of the bus: 15 m.

Identical, separate commutating reactors (u_k min. 2 %) are required for each SINAMICS DC MASTER unit in order to evenly distribute the current. The difference in reactor tolerances determines the current distribution. For operation without derating (current reduction), a tolerance of 5 % or better is recommended.


Only units with the same DC current ratings are permitted to be connected in parallel.

The permissible output current when connecting units in parallel is, when maintaining the secondary conditions:

$$I_{\max} = n \times I_{N(\text{SINAMICS DC MASTER})}$$

n = number of SINAMICS DC MASTER units

Connection schematic of the armature circuit when connecting SINAMICS DC MASTER units in parallel

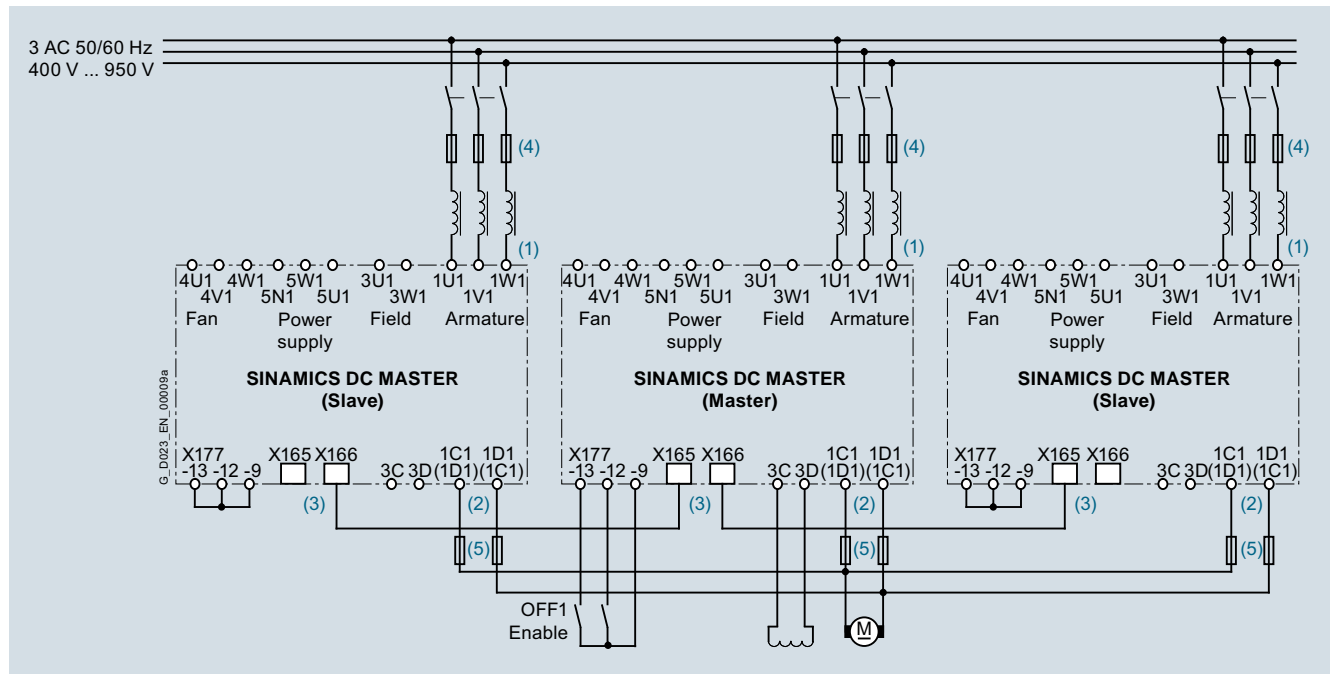

(1) The same phase sequence is required between 1U1/1V1/1W1.

(2) The same phase sequence is required between 1C1/1D1.

(3) The units are connected using (8-pin) shielded patch cables of type UTP CAT5 in acc. with ANSI/EIA/TIA 568, such as those that are used in PC network technology. A standard 5 m long cable can be directly purchased from Siemens (Article No.: 6RY1707-0AA08). $(n-1)$ cables are required to connect n units in parallel. The bus termination must be activated at the units/devices connected at the start of the bus and at the end of the bus.

Redundant operation (mode "(n+m) operation")

SINAMICS DC MASTER can also be used in a redundant configuration as a special operating mode of the parallel connection. In this operating mode, it is possible to maintain operation with the remaining SINAMICS DC MASTER units if one unit fails (e.g. if a fuse fails in the power section). When appropriately configured and interconnected, both the armature circuit as well as the field circuit can be redundantly operated.

SINAMICS DC MASTER units that can still function, continue to operate without any interruption when a unit fails. When configuring the system, it is important to note that in redundant applications, the power rating of only n units (instead of $n+m$ units) must be sufficient.

In the case of a fault, the master functionality is automatically transferred. As a consequence, this operating mode is possible both when power sections of the slaves fail and when the power section of the master fails. (MTBF data in redundant operation are available on request.)

More information

For further information and application documents, please go to the following website address:

<http://support.automation.siemens.com/WW/view/en/38157755/130000>

(Entry type "Application")

SINAMICS DCM

Engineering information

12-pulse operation

Overview

SINAMICS DC MASTER for 12-pulse operation

For 12-pulse operation, two SINAMICS DC MASTER converters are supplied with voltages displaced by 30 degrees. This configuration reduces the harmonics. Each SINAMICS DC MASTER conducts half of the total current. One of the SINAMICS DC MASTER units is operated with closed-loop speed control, and the second with closed-loop current control. A peer-to-peer connection is used to transfer the current setpoint from the first to the second SINAMICS DC MASTER.

Smoothing reactors are required in the DC circuit for 12-pulse operation.

Calculating the smoothing reactor

- A smoothing reactor is used for each of the two partial converters. The reactor comprises a 2-value reactor; this means that the inductance of the reactor is defined for two current values.
- The reactor is thermally dimensioned according to the rms value of the DC reactor current.

Calculating the required inductance

1. Inductance of the reactor at $0.2 \times I_{dN}$ (L_{D1})
2. Inductance of the reactor for I_{dmax} (L_{D2})
 - for 50 Hz line frequency

$$L_{D1} = 0.296 \times 10^{-3} \times V_{di} / (0.2 \times I_{dN})$$

$$L_{D2} = 0.296 \times 10^{-3} \times V_{di} / (0.33 \times I_{dmax})$$
 - for 60 Hz line frequency

$$L_{D1} = 0.24 \times 10^{-3} \times V_{di} / (0.2 \times I_{dN})$$

$$L_{D2} = 0.24 \times 10^{-3} \times V_{di} / (0.33 \times I_{dmax})$$


L Inductance in H

I_{dN} half the rated DC current of the DC motor

I_{dmax} half the maximum current of the DC motor

$V_{di} = 1.35 \times V_N$

V_N rated line supply voltage

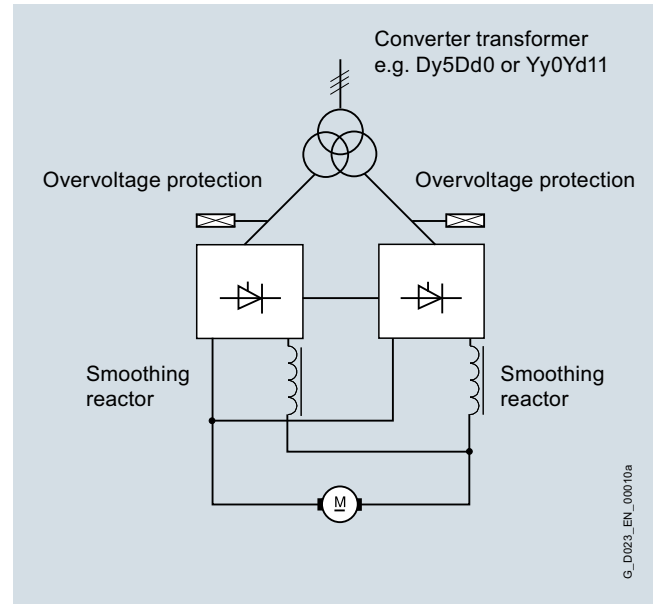

12-pulse operation

More information

For further information and application documents, please go to the following website address:

<http://support.automation.siemens.com/WW/view/en/38157755/130000>

(Entry type "Application")

Supply of high inductances

Overview

SINAMICS DC MASTER to supply high inductances

To supply high inductances – such as the fields of large DC or synchronous motors or lifting solenoids – the gating unit is changed over to long pulses using the appropriate parameter settings. At high levels of inductance, the long pulses ensure that the thyristors are reliably triggered. In this case, the armature circuit of the units is not used to supply the armature of DC motors, but to supply large field windings.

Note:

An external overvoltage protective circuit must be provided at the DC voltage output of the SINAMICS DC MASTER (e.g. SICROWBAR DC overvoltage protection).

Protection against condensation

Overview

Protection against condensation

SINAMICS DC MASTER units are designed in compliance with climate class 3K3 (EN 60721-3-3) without condensation.

When supplied to tropical countries, we recommend that the electrical cabinets are equipped with cabinet heating elements.

More information

For further information and application documents, please go to the following website address:

<http://support.automation.siemens.com/WW/view/en/38157755/130000>

(Entry type "Application")

Units with coated PCBs are optionally available (option M08); these are insensitive to unfavorable environmental conditions. In order to guarantee safe and reliable operation, under all circumstances, it should be avoided that the units are commissioned with PC boards with moisture condensation.

G_D023_EN_00010a

Overview

Input pulse levels

The evaluation electronics can process encoder signals (symmetrical as well as asymmetrical) up to a maximum differential voltage of 27 V. The encoder type is selected via parameter. The evaluation electronics are adjusted electronically to the encoder signal voltage. With the parameter setting, a subdivision is made into two rated input voltage ranges.

	Rated input voltage range	
	5 V	15 V
Low level	Differential voltage < 0.8 V	Differential voltage < 5 V
High level	Differential voltage > 2 V	Differential voltage > 8 V ¹⁾
Hysteresis	> 0.2 V	> 1 V
Common-mode controllability	±10 V	±10 V

If the pulse encoder does not supply any symmetrical encoder signals, it must be grounded with each signal cable twisted in pairs and connected to the negative connections of track 1, track 2, and zero mark.

Maximum frequency that can be evaluated

The maximum encoder pulse frequency that can be evaluated is 300 kHz. To ensure the encoder pulses are evaluated correctly, the minimum edge clearance T_{\min} between two encoder signal edges (track 1, track 2), as listed in the table, must be adhered to.

	Rated input voltage range				
	5 V	15 V	15 V	15 V	15 V
Differential voltage ²⁾	2 V	> 2.5 V	8 V	10 V	> 14 V
T_{\min} ³⁾	630 ns	380 ns	630 ns	430 ns	380 ns

If the pulse encoder is incorrectly matched to the encoder cable, disturbing cable reflections will occur at the receiving end. To ensure that encoder pulses of this type can be evaluated without errors, these reflections need to be damped. The limit values listed in the table below must be maintained in order to prevent the resulting power losses in the evaluation electronics adaptor from being exceeded.

	F_{\max}				
	50 kHz	100 kHz	150 kHz	200 kHz	300 kHz
Differential voltage ⁴⁾	Up to 27 V	Up to 22 V	Up to 18 V	Up to 16 V	Up to 14 V

Cable, cable length, shield connection

The encoder cable capacitance must be recharged at each encoder edge change. The rms value of this current is proportional to the cable length and pulse frequency, and must not exceed the current permitted by the encoder manufacturer. A suitable cable that meets the recommendations of the encoder manufacturer must be used, and the maximum cable length must not be exceeded.

Generally speaking, a twisted cable pair with a single pair shield is sufficient for each track. This reduces crosstalk between the cables. Shielding all the pairs provides protection against interference pulses. The shield should be connected to the SINAMICS DC MASTER shield bar through a large surface area.

¹⁾ Restriction: See "Maximum frequency that can be evaluated"

²⁾ Differential voltage at the terminals of the evaluation electronics

³⁾ The phase error L_G (deviation of 90°) that may occur caused by the encoder and cable can be calculated from T_{\min} :

$$L_G = + (90^\circ - f_p \times T_{\min} \times 360^\circ \times 10^{-6})$$

$$L_G \text{ Phase error in } ^\circ$$

$$f_p \text{ Pulse frequency in kHz}$$

$$T_{\min} \text{ Minimum edge clearance in ns}$$

⁴⁾ Differential voltage of the encoder pulses without load (approximate encoder power supply voltage)

SINAMICS DCM

Engineering information

Notes for EMC-compliant drive installation

Overview

Notes for EMC-compliant installation

These installation instructions do not claim to contain all details and versions of units, or to take into account all conceivable operational cases and applications.

Contact partners of the Siemens regional offices are available for additional information or for specific problems, that have not been handled in sufficient detail for your particular application.

The contents of these installation instructions neither form part of nor modify any prior or existing contract, agreement, or legal relationship. The particular contract of sale represents the overall obligations of Siemens AG. The warranty specified in the contract between the parties is the only warranty accepted by the Siemens AG. Any statements contained in these installation instructions neither create new warranty conditions nor modify the existing warranty conditions.

Basic information about EMC

What is EMC?

EMC stands for "ElectroMagnetic Compatibility" and describes the capability of a device to function satisfactorily in an electromagnetic environment without itself causing interference unacceptable for other devices in the environment. Therefore, the various units should not mutually interfere with one another.

Within the context of the EMC Directive, the SINAMICS DC MASTER units described in this document are not "units" at all, but are instead "components" that are intended to be installed in an overall system or overall plant. For reasons of clarity, however, the generic term "units" is used in many cases.

Interference emissions and interference immunity

EMC is dependent upon two properties demonstrated by the units involved in the system: interference emissions and interference immunity. Electrical units can be sources of interference (senders) and/or potentially susceptible equipment (receivers).

Electromagnetic compatibility is ensured when the existing sources of interference do not impair the function of potentially susceptible equipment.

A unit may even be a source of interference and potentially susceptible equipment at the same time: For example, the power section of a converter unit should be viewed as a source of interference and the control unit as potentially susceptible equipment.


Product standard EN 61800-3

The EMC requirements for "Variable-speed drive systems" are described in the product standard EN 61800-3. A variable-speed drive system (or Power Drive System PDS) consists of the drive converter and the electric motor including cables. The driven machine is not part of the drive system.

EN 61800-3 defines different limit values depending on the installation location of the drive system, referred to as the first and second environments.

Residential buildings or locations at which the drive system is directly connected to a public low-voltage supply without intermediate transformer are defined as the **first environment**.

The term **second environment** refers to all locations outside residential areas. These are basically industrial areas which are supplied from the medium-voltage line supply via their own transformers.

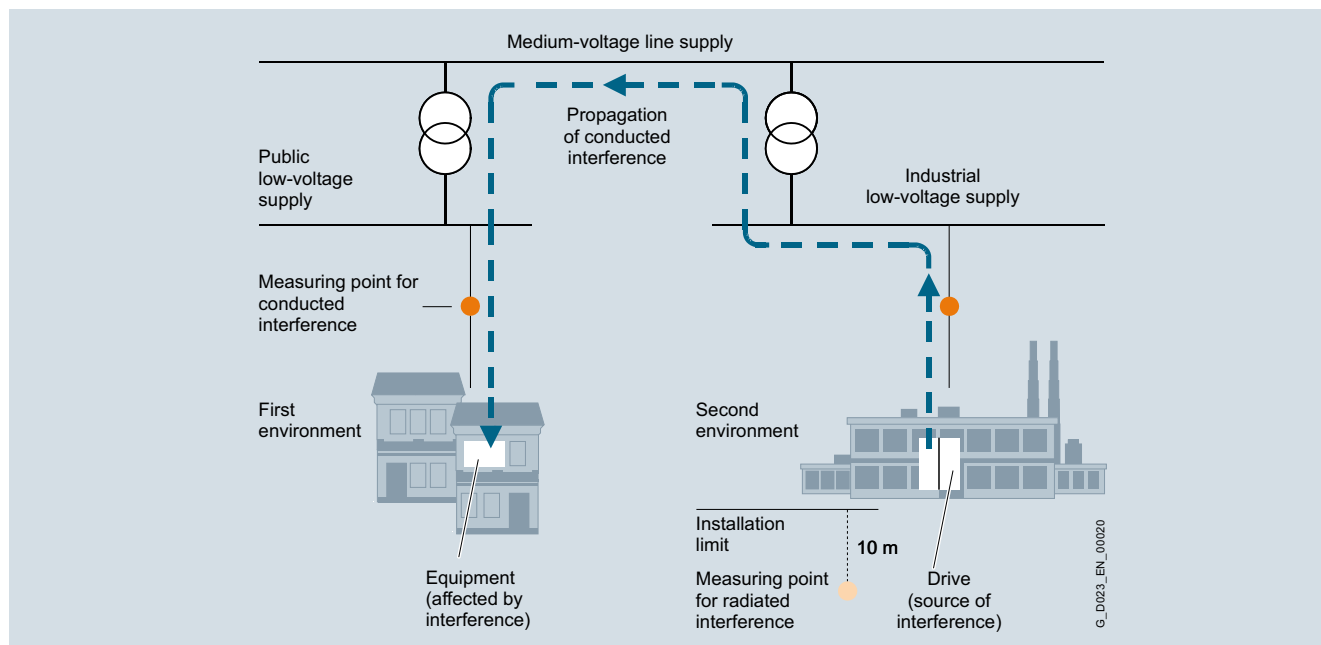

Definition of the first and second environments

Overview (continued)

Four different categories are defined in EN 61800-3 Ed.2 depending on the installation site and the power of the drive:


Category C1: Drive systems for rated voltages < 1000 V for unrestricted use in the first environment.

Category C2: Stationary drive systems for rated voltages < 1000 V for use in the second environment. Use in the first environment is possible if the drive system is marketed and installed by qualified personnel. The warning information and installation instructions supplied by the manufacturer must be observed.

Category C3: Drive systems for rated voltages < 1000 V for exclusive use in the second environment.

Category C4: Drive systems for rated voltages \geq 1000 V or for rated currents \geq 400 A for use in complex systems in the second environment.

The following diagram shows how the four categories are assigned to the first and second environments:

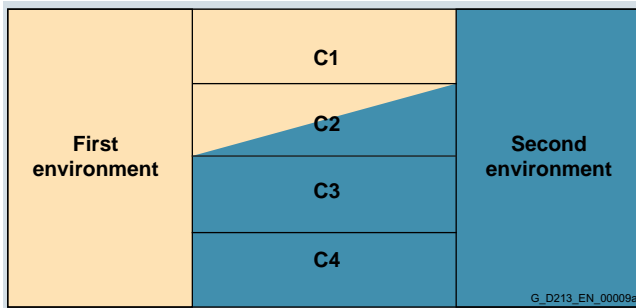

Definition of categories C1 to C4

SINAMICS DC MASTER units are nearly always used in the second environment (Categories C3 and C4).

Radio interference suppression filters and commutating reactors are required whenever they are to be used in Category C2.

SINAMICS DC MASTER units conform to the interference immunity requirements defined in EN 61800-3 for the second environment, and thus also to the lower requirements in the first environment.

Standard EN 55011

Some situations require compliance with standard EN 55011. This defines limit values for interference emissions in industrial and residential environments. The values that are measured are conducted interference at the line supply connection as interference voltage, and electromagnetically radiated interference as radio interference, under standardized conditions.

The standard defines limit values "A1" and "B1" which, for interference voltage, apply to the 150 kHz – 30 MHz range and, for radio interference, the 30 MHz – 2 GHz range. Since SINAMICS DC MASTER converter units are used in industrial applications, they are subject to the limit value "A1"; in order to achieve limit value "A1", the SINAMICS DC MASTER units must be provided with external radio interference suppression filters and commutating reactors.

SINAMICS DC MASTER, industrial applications

Industrial applications demand that units demonstrate an extremely high level of interference immunity, but by contrast place very low requirements on them in terms of interference emission levels.

SINAMICS DC MASTER converter units are components of an electrical drive, such as contactors and switches. Qualified personnel must integrate them into a drive system which, as an absolute minimum, consists of the converter unit, motor cables, and motor. Commutating reactors and fuses are also required in

most cases. Therefore, whether or not a limit value is adhered to is determined by the components being installed correctly. Limiting interference emission levels in line with limit value "A1" requires not only the converter unit itself, but also the radio interference suppression filter assigned to it and the commutating reactor, at the very least. Without a radio interference suppression filter, the interference emission level of SINAMICS DC MASTER converter units exceeds limit value "A1" of EN 55011.

If the drive forms part of a plant or system, it does not initially need to fulfill any interference emission requirements. However, EMC legislation does stipulate that the plant or system as a whole must be electromagnetically compatible with its environment.

If all the control components in the plant or system (such as PLCs) demonstrate a level of interference immunity that is suitable for industrial applications, then it is not necessary for every drive to adhere to limit value "A1".

Non-grounded line supplies

Non-grounded line supplies (IT line supplies) are used in some branches of industry in order to increase the availability of the plant. In the event of a ground fault, no fault current flows and the plant can continue with production. However, in conjunction with radio interference suppression filters, in the case of a fault, a fault current flows, which can cause the drives to shut down or possibly even destroy the radio interference suppression filter. This is the reason that the product standard does not define any limit values for these types of line supplies. From an economics perspective, any necessary EMC conformance measures should be taken on the grounded primary side of the supply transformer.

EMC planning

If two units are not electromagnetically compatible, you can reduce the interference emission level of the source of interference or increase the interference immunity of the potentially susceptible equipment.

Sources of interference are generally power electronics units with high power consumption. Reducing their interference emission levels requires complex filters. Potentially susceptible equipment usually refers to controlgear and sensors, including their evaluation circuit. Lower costs are involved with increasing the interference immunity of units with lower power ratings. This means, that from an economics perspective, increasing the interference immunity is generally a more favorable option for industrial applications than reducing the interference emission level. For example, to maintain limit value class A1 of EN 55011, the radio interference voltage at the line supply connection point between 150 and 500 kHz can be a maximum of 79 dB (μ V) and between 500 kHz and 30 MHz, a maximum of 73 dB (μ V) (9 or 4.5 mV).

In industrial applications, EMC between units should be based on a carefully-balanced combination of the interference emission and interference immunity levels.

The most cost-effective measure that can be put in place to achieve EMC conformance is to physically separate sources of interference and potentially susceptible equipment – provided that you have taken this option into account during the planning stage of your machine/plant. In the first instance, it is necessary to determine whether each unit used is a potential source of interference or potentially susceptible equipment. Within this context, converter units and contactors, for example, can be counted as sources of interference. While examples of potentially susceptible equipment include PLCs, encoders and sensors.

The components in the control cabinet (sources of interference and potentially susceptible equipment) must be physically separated, by means of partition plates if necessary, or by installing them in metal enclosures.

Overview (continued)

EMC-compliant drive installation (installation instructions)

General information

Not only are drives operated in a wide variety of environments, but the electrical components used (controls and switched mode power supplies, and so on) can also differ widely with respect to interference immunity and interference emission levels, meaning that all installation guidelines of any kind can offer is a practical compromise. This is the reason that it is possible to deviate from the EMC rules on a case-for-case basis provided that individual measures are tested.

In order to ensure electromagnetic compatibility (EMC) in your control cabinets in rugged electrical environments and adhere to the standards required by the relevant legislating body, the EMC rules listed below should be followed during the construction and design stages.

Rules 1 to 10 are generally valid. Rules 11 to 15 must be followed in order to fulfill interference emission standards.

Rules for EMC-compliant installation

Rule 1

All metal parts of the control cabinet are connected with one another through a large surface area with a good electrical connection (not paint on paint!). If required, contact or serrated washers should be used. The cabinet door must be connected to the cabinet using the shortest possible grounding straps (at the top, center, and bottom).

Rule 2

Contactors, relays, solenoid valves, electromechanical operating hours counters, etc., in the cabinet and – where applicable – in neighboring cabinets – must be provided with quenching combination, e.g. RC elements, varistors, and diodes. The protective circuit must be directly connected to the particular coil.

Rule 3

Signal cables ¹⁾ if at all possible, should only be routed at just one level in the cabinet.

Rule 4

Unshielded cables in the same circuit (outgoing/incoming conductors) must be twisted wherever possible, or the area between them minimized, to prevent the unnecessary formation of frame antennae.

Rule 5

Connect spare wires at both ends to the cabinet ground (ground ²⁾). This achieves an additional shielding effect.

Rule 6

Avoid unnecessary cable lengths. This keeps coupling capacitances and inductances low.

Rule 7

Crosstalk is generally reduced, if cables are routed close to the control cabinet ground. Therefore, do not route cables freely around the cabinet, but route them as close as possible to the cabinet enclosure or to the mounting plates. This also applies to spare cables.

Rule 8

Signal and power cables must be physically separated (to prevent coupling paths!). A minimum distance of 20 cm must be observed.

If it is not possible to physically separate the encoder and motor cables, the encoder cable must be decoupled either using a partition or by routing it in a metal conduit. The partition or metal conduit must be grounded at several points.

Rule 9

Ground the shields of digital signal cables at both ends (source and destination), ensuring maximum contact area and good conductivity. In the event of poor equipotential bonding between the shield connections, run an additional equipotential bonding conductor with a cross-section of at least 10 mm² parallel to the shield for the purpose of reducing the shield current. Generally speaking, the shields may also be connected to the cabinet enclosure (ground) at several points. The shields can be connected several times even outside the control cabinet.

Foil-type shields should be avoided, as they are at least 5 times less effective than braided shields.

Rule 10

Shields for analog signal cables may be connected to ground at both ends if the equipotential bonding is good (this must be done through a large surface area with good conductivity!). It can be assumed that equipotential bonding is good if all of the metal parts are interconnected with one another through a good electrical connection and the electronics components are supplied from a single source.

Connecting shields at one end prevents low-frequency, capacitive interference from being coupled in (e.g. 50 Hz hum). In this case, the shield should be connected in the control cabinet; whereby the shield can also be connected using a separate wire.

Rule 11

Ensure that the radio interference suppression filter is located close to the suspected source of interference. The filter must be attached to the cabinet enclosure, mounting plate, etc., through a large surface area. Incoming and outgoing cables must be physically separated.

Rule 12

Radio interference suppression filters must be used in order to conform to limit value class A1. Additional loads must be connected upstream of the filter (line side).

The control used and the manner in which the rest of the control cabinet is wired will determine whether an additional line filter needs to be installed.

Rule 13

A commutating reactor must be included in the field circuit for controlled field power supplies.

Rule 14

A commutating reactor must be included in the armature circuit of the converter.

Rule 15

The motor cables do not have to be shielded. There must be a clearance of at least 20 cm between the line supply feeder cable and the motor cables (field, armature). If necessary, a separating metal partition should be used.

The cabinet design shown in the following diagram is intended to help the user become familiar with EMC-critical parts. This example does not claim to show all possible cabinet components or design options.

Additional diagrams show details that are not immediately clear in the overview diagram and which may also have an effect on the resistance to interference/interference emission levels of the cabinet as well as different shield connection techniques.

¹⁾ Signal cables are defined as:
 Digital signal cable:
 Cables for pulse encoders,
 Serial interfaces, e.g. PROFIBUS DP or
 analog signal cable, e.g. ± 10 V setpoint cable.


²⁾ Generally speaking, "ground" refers to all metallic conductive parts that can be connected to a protective conductor, such as the cabinet enclosure, motor enclosure, or foundation ground etc.

Overview (continued)


Arrangement of radio interference suppression filters and commutating reactors

Another section shows how the radio interference suppression filters and commutating reactors are arranged in a SINAMICS DC MASTER. The order in which the reactors and filters are installed must be adhered to. The filter cables on the line side and unit side must be physically separated.


For information on selecting fuses for semiconductor protection, please refer to the section titled "Line fuses".

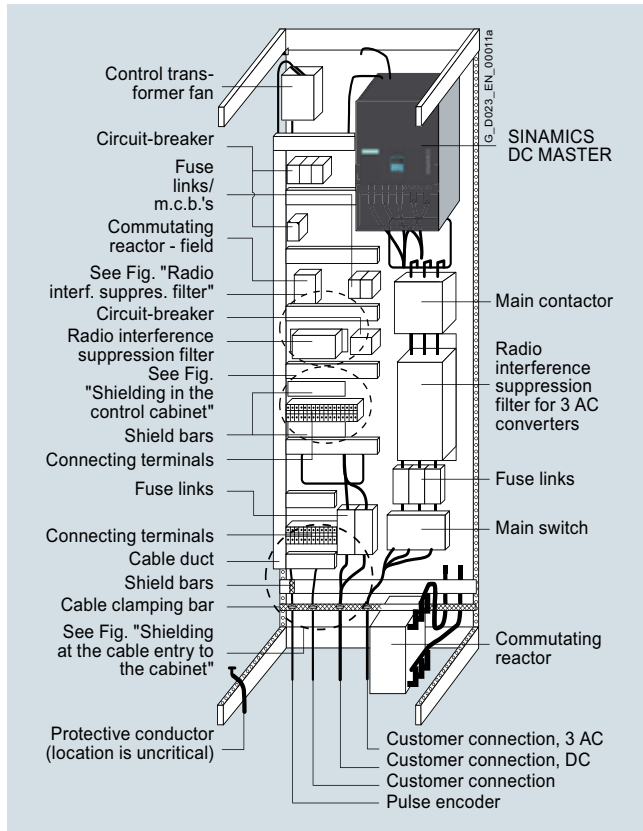

Example of a cabinet design with a SINAMICS DC MASTER of up to 850 A

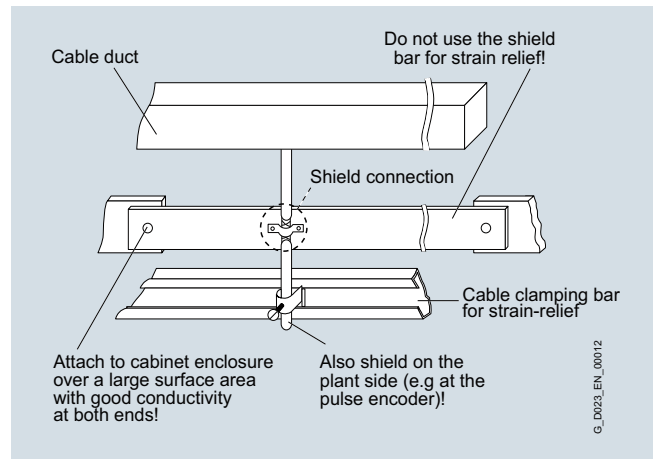

Shielding at the cable entry to the cabinet

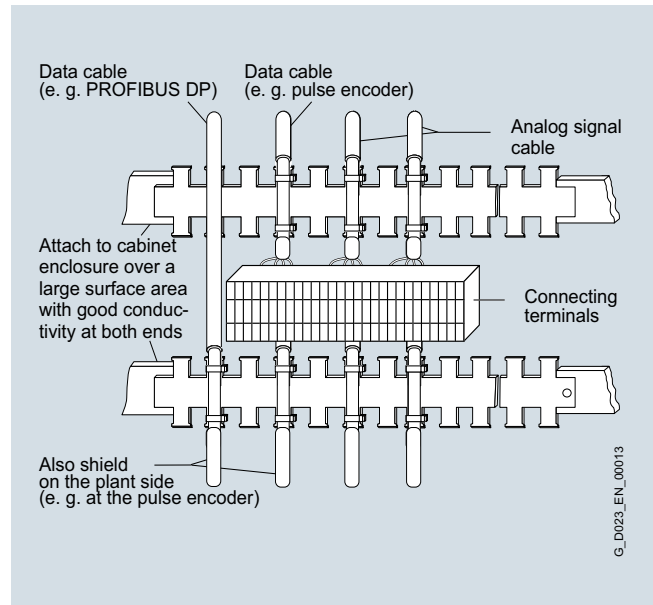

Shielding in the control cabinet


SINAMICS DCM

Engineering information

Notes for EMC-compliant drive installation


Overview (continued)

Radio interference suppression filter for the SINAMICS DC MASTER field power section

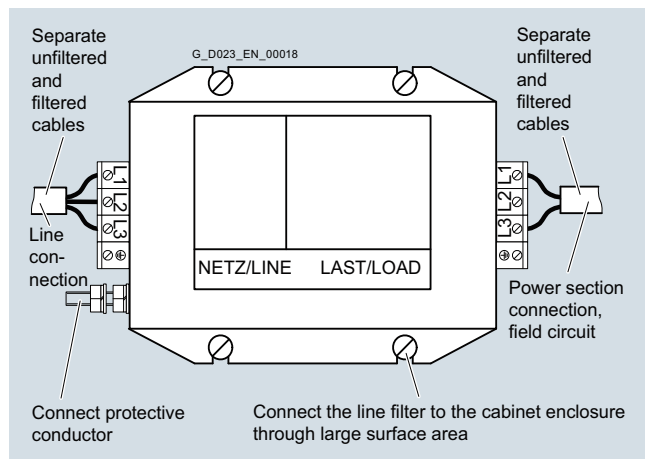


Radio interference suppression filter

Shield connection

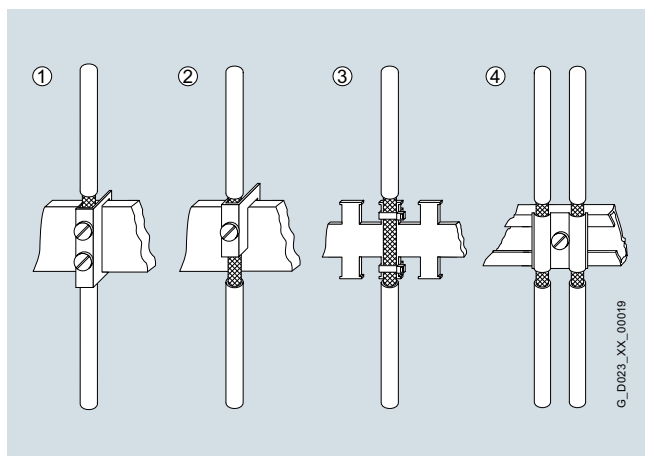

Shield connection

- ① Connecting terminal on a copper bar, max. cable diameter 15 mm
- ② Bar-mounting terminal on a copper bar, max. cable diameter 10 mm
- ③ Metallic tube or cable tie on a bare metallic comb-type/toothed bar
- ④ Clamp with metallic backing plate on cable support rail

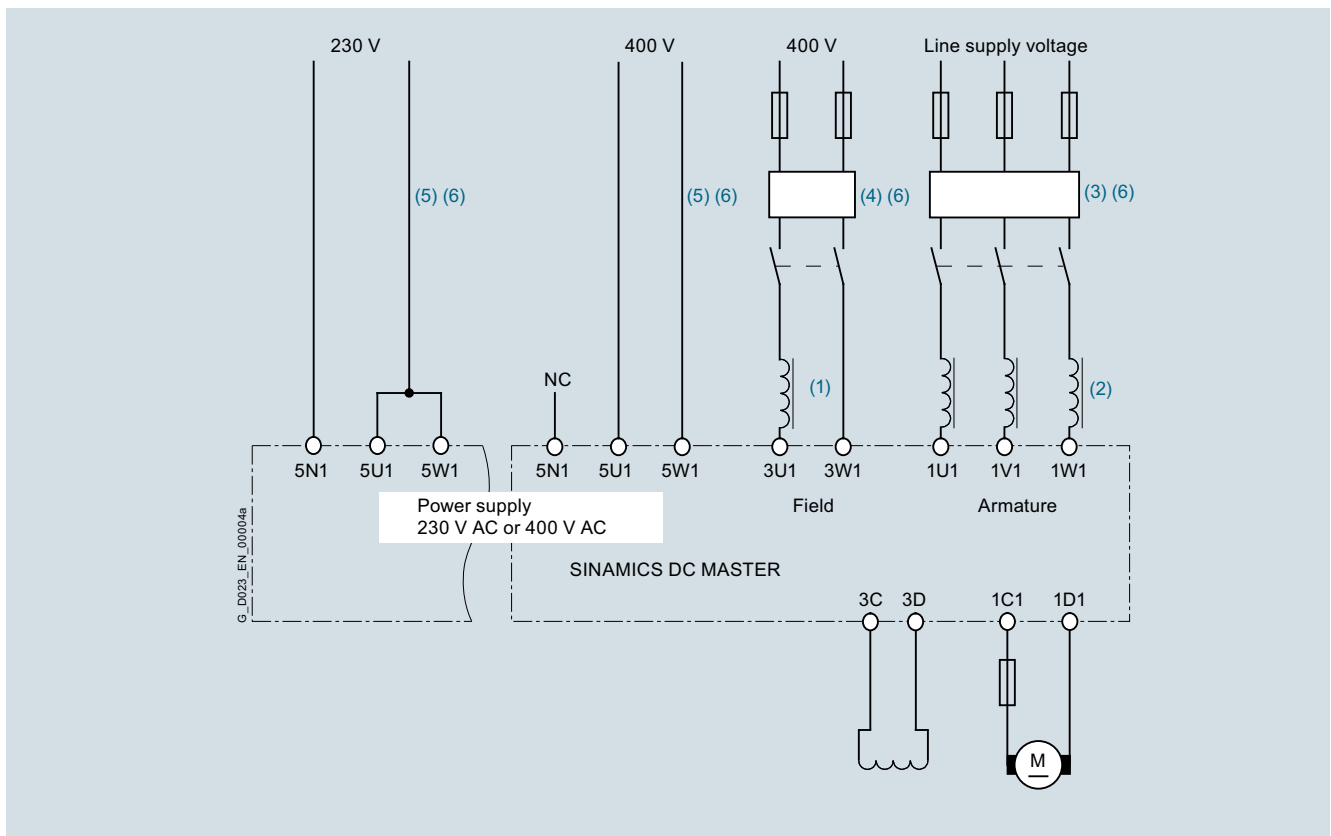Overview (continued)Arrangement of the components for converter units

Arrangement of reactors and radio interference suppression filters

- (1) The commutating reactor in the field circuit is dimensioned for the rated motor field current.
- (2) The commutating reactor in the armature circuit is dimensioned for the rated motor armature current. The line current is 0.82 times the DC current.
- (3) The radio interference suppression filter for the armature circuit is dimensioned for the rated motor armature current. The line current is 0.82 times the DC current.
- (4) The radio interference suppression filter for the field circuit is dimensioned for the rated motor field current.
- (5) Radio interference suppression filters are not required for the electronics power supply alone. Current consumption 1 A at 400 V, 2 A at 230 V.
- (6) If the power supply voltages for the armature circuit, field circuit and electronics power supply are the same, then the voltage for the field and electronics power supply can also be taken after the radio interference suppression filter for the armature circuit.

SINAMICS DCM

Engineering information

Harmonics

Overview

Line-side harmonics produced by converter units in a fully-controlled three-phase bridge circuit B6C and (B6)A(B6)C

The majority of converter units for medium-power applications have a fully-controlled three-phase bridge circuit. Below is an example of the harmonics that can be found in a typical system configuration for two firing angles ($\alpha = 20^\circ$ and $\alpha = 60^\circ$).

The values have been taken from a previous publication, "Oberschwingungen im netzseitigen Strom sechspulsiger netzgeführter Stromrichter (Harmonics in the Line-Side Current of Six-Pulse, Line-Commutated Converters)" by H. Arremann and G. Möltgen, Siemens Research and Development Division, Volume 7 (1978) No. 2, © Springer-Verlag 1978.

In addition, the formulas are specified which, depending on the actual operating data in use, line supply voltage (no-load voltage V_{V0} , line frequency f_N , and DC current I_d), can be used to calculate the short-circuit power S_K and armature inductance L_a for the motor to which the specified harmonics spectrum applies.

If the actual line short-circuit power and/or actual armature inductance deviate from the values calculated in this way, then they will need to be calculated on a case-by-case basis.

The harmonics spectrum shown below is obtained if the values for the short-circuit power S_K at the point where the unit is connected and the armature inductance L_a of the motor, calculated using the following formulas, match the actual values of the plant or system. If the values do not match, the harmonics will have to be separately calculated.

n	I_v/I_1	
	at $\alpha = 20^\circ$ fundamental factor $g = 0.962$	at $\alpha = 60^\circ$ fundamental factor $g = 0.953$
5	0.235	0.283
7	0.100	0.050
11	0.083	0.089
13	0.056	0.038
17	0.046	0.050
19	0.035	0.029
23	0.028	0.034
25	0.024	0.023
29	0.018	0.026
31	0.016	0.019
35	0.011	0.020
37	0.010	0.016
41	0.006	0.016
43	0.006	0.013
47	0.003	0.013
49	0.003	0.011

The fundamental component of current I_1 as a reference variable is calculated using the following formula:

$$I_1 = g \times 0.817 \times I_d$$

I_d DC current of the operating point being investigated
 g Basic fundamental content

The harmonics currents calculated according to the table only apply for:

a) Short-circuit power S_K at the point where the converter unit is connected

$$S_K = V_{V0}^2 / X_N \text{ (VA)}$$

where

$$X_N = X_K - X_D = 0.03536 \times V_{V0} / I_d - 2\pi \times f_N \times L_D \text{ (}\Omega\text{)}$$

V_{V0} No-load voltage at the point where the converter unit is connected in V

I_d DC current of the operating point being investigated in A

f_N Line frequency in Hz

L_D Inductance of the commutating reactor being used in H

b) Armature inductance L_a

$$L_a = 0.0488 \times V_{V0} / (f_N \times I_d) \text{ (H)}$$

If the actual values for the short-circuit power S_K and/or armature inductance L_a deviate from the values calculated using the formulas above, a separate calculation will need to be made.

Example:

Let us assume a drive with the following data:

$$V_{V0} = 400 \text{ V}$$

$$I_d = 150 \text{ A}$$

$$f_N = 50 \text{ Hz}$$

$$L_D = 0.169 \text{ mH (4EU2421-7AA10) with } I_{LN} = 125 \text{ A}$$

where

$$X_N = 0.03536 \times 400 / 150 - 2\pi \times 0.169 \times 10^{-3} = 0.0412 \text{ }\Omega$$

The following short-circuit power of the line supply required at the point where the converter is connected:

$$S_K = 400^2 / 0.0412 = 3.88 \text{ MVA}$$

and the following armature inductance of the motor required:

$$L_a = 0.0488 \times 400 / (50 \times 150) = 2.0 \text{ mH}$$

The harmonics currents I_v (with $I_1 = g \times 0.817 \times I_d$ for firing angles $\alpha = 20^\circ$ and $\alpha = 60^\circ$) that can be taken from the tables, only apply for the values S_K and L_a that have been calculated in this way. If the actual values deviate from these, a separate calculation will have to be made.

For the purpose of dimensioning filters and compensation equipment with reactors, it is only possible to draw on the information provided by the harmonic values calculated in this way if the calculated values S_K and L_a match the actual drive values. In all other cases, a separate calculation will have to be made (this particularly applies when using compensated motors as they have very low armature inductance levels).

Tools and engineering



6/2	Engineering tools
6/2	Overview
6/2	SIZER WEB ENGINEERING
6/2	Overview
6/2	More information
6/3	DT Configurator selection tool
6/3	Overview
6/3	Selection and ordering data
6/3	More information
6/4	STARTER commissioning tool
6/4	Overview
6/5	Selection and ordering data
6/5	Accessories
6/6	Drive Control Chart (DCC)
6/6	Overview
6/6	Selection and ordering data
6/7	Drive ES engineering software
6/7	Overview
6/7	Application
6/7	Design
6/8	Selection and ordering data
6/9	Options
6/9	More information

SINAMICS DCM

Tools and engineering

Engineering tools

Overview

SIZER WEB ENGINEERING and the DT Configurator are available as engineering tools.

If several drive components, such as DC converters, high-voltage motors or medium-voltage converters and systems are to be configured and combined in one project, the use of SIZER WEB ENGINEERING is recommended. A query function is integrated in the application which can be used to send any questions that arise during configuration directly to the Siemens sales office.

The DT Configurator is recommended for quick configuration of standard products. The configured products can be transferred to the shopping cart of the Industry Mall if the user has the required authorization. Thus the DT Configurator provides a short and efficient procedure from configuring to ordering.

SIZER WEB ENGINEERING

Overview

Drive engineering – flexible, customized and user-friendly

You can quickly find a solution for your drive task with the web-based tool: menu-prompted workflows navigate you through the technical selection and dimensioning of products and drive systems, including the accessories.

Based on an integrated query function, SIZER WEB ENGINEERING can also provide you with customized special solutions for applications that cannot be addressed using "Standard Products", i.e. where the focus is on flexibility and a customized solution.

Currently the following product groups are supported:

- High-voltage motors
- Low-voltage motors
- Medium-voltage converters
- Low-voltage converters
- DC converters

The tool can also be used to design the following drive systems:

- Medium-voltage systems
- Low-voltage systems:
 - Basic single-axis applications for pumps, fans, and compressors
 - More complex applications (on condition that SIZER for Siemens Drives is installed)

Comprehensive documentation, such as data sheets, starting calculations, dimension drawings, quotation documentation and a lot more are integrated in the tool.

The result: customized solutions for your drive tasks.



Example of starting calculation

System requirements include an Internet access as well as a standard browser (e.g. Internet Explorer V7.0 and higher, Firefox V3.0 and higher). After successful registration and release, SIZER WEB ENGINEERING is available 24/7.

More information

Further information on the SIZER WEB ENGINEERING engineering tool is available at:

www.siemens.com/sizer-we

Overview

Configuring drive system products

The Drive Technology (DT) Configurator supports you when selecting the optimum products for your application – starting with gear units, motors, converters as well as the associated options and components and ending with controllers, software licenses and connection systems. Whether with little or detailed knowledge of products: You can easily, quickly and efficiently configure your particular drive using product group preselectors, targeted navigation through selection menus or by entering article numbers directly to select the products.



In addition to all this, comprehensive documentation comprising technical data sheets, operating instructions, certificates and 2D/3D dimensional drawings can be selected in the DT Configurator. The products that you select can be directly ordered by transferring a parts list to the shopping cart of the Industry Mall.

DT Configurator – efficient drive configuration:

- Quick and easy configuration of drive components
- Configuration of drive systems for pumps, fans and compressor applications from 1 kW to 2.6 MW
- Selection from a wide range of products
- Comprehensive documentation
- Support for retrofit projects
- Direct ordering through the Industry Mall

System requirements:

- Internet access as well as a standard browser (e.g. Internet Explorer V7.0 and higher, Firefox V5.0 and higher).
- Documentation (data sheets, dimensional drawings, etc.) is output in PDF or RTF format.
- Registration is not required to use the Drive Technology Configurator.

Selection and ordering data

Description	Article No.
Interactive Catalog CA 01 DVD-ROM including DT Configurator selection guide, English	E86060-D4001-A510-D3-7600

More information

Online access to DT Configurator

Further information on the DT Configurator selection tool is available at:

www.siemens.com/dtconfigurator

Offline access to the DT Configurator in the Interactive Catalog CA 01

The DT Configurator is also integrated on the DVD of the Interactive Catalog CA 01 – the offline version of Siemens Industry Mall.

CA 01 can be ordered from the relevant Siemens sales office or via the Internet:


www.siemens.com/automation/CA01

SINAMICS DCM

Tools and engineering

STARTER commissioning tool

Overview

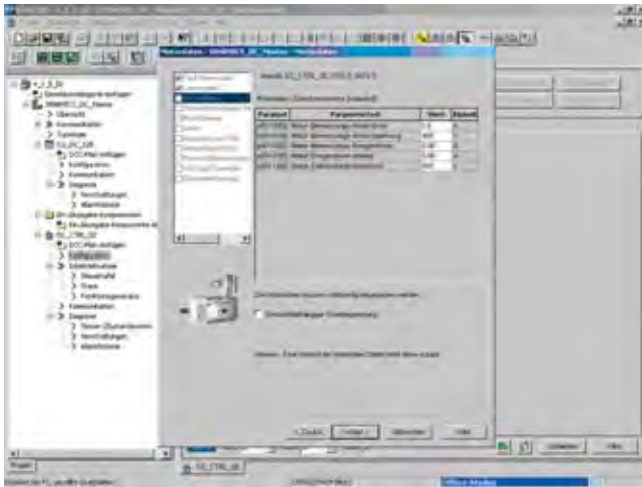

The user-friendly STARTER commissioning tool can be used for:

- Commissioning
- Optimization and
- Diagnostics

This software can either be operated as a stand-alone PC application or can be integrated into the SCOUT engineering system (with SIMOTION) or STEP 7 (with Drive ES Basic). The basic functions and handling are the same in both cases.

Engineering can be performed online, directly connected with the drive, or offline. If several drives are connected to a communication bus, then an online connection can be established to several drives simultaneously.

SINAMICS DC MASTER is supported from STARTER 4.1.5; it is not possible to use older STARTER versions.

The project wizards can be used to create the drives within the structure of the project tree.

Entry level personnel are interactively supported in a solution-oriented way.

First commissioning is guided by a wizard which makes all of the basic settings in the drive. Therefore, getting a motor up and running is merely a question of setting a few of the drive parameters as part of the drive configuration process. The travel commands can be simply entered via the control panel from the PC.

The individual settings can be made using the graphic parameterizing screen forms, which precisely visualize the drive mode of operation.

Examples of individual settings that can be made include:

- Terminals
- Bus interface
- BICO interconnections

Diagnostics

Experts can quickly access all of the parameters via the Expert List and do not have to navigate through dialogs.

In addition, the following functions are available for optimization purposes:

- Trace to precisely trace signals

Diagnostic functions provide information about:

- Control/status words
- Parameter status
- Operating conditions
- Communication states

Performance features

- Easy to use: Only a small number of settings need to be made for successful first commissioning: The motor turns
- Solution-based user navigation simplifies commissioning
- The built-in trace function provides optimum support during commissioning, optimization and troubleshooting

Minimum hardware and software requirements

- Hardware
 - PG or PC with Pentium III 1 GHz (recommended: > 1 GHz)
 - 1 GB RAM (recommended: 2 GB RAM)
 - Screen resolution 1024 × 768 pixels, 16-bit color depth
 - Free hard disk memory: 3 GB
- Software
 - Microsoft Internet Explorer V6.0 or higher
 - 32-bit operating systems:
 - Microsoft Windows Server 2003 SP2
 - Microsoft Windows Server 2008
 - Microsoft Windows XP Professional SP3
 - Microsoft Windows 7 Professional SP1
 - Microsoft Windows 7 Ultimate SP1
 - Microsoft Windows 7 Enterprise SP1 (standard installation)
 - 64-bit operating systems:
 - Microsoft Windows 7 Professional SP1
 - Microsoft Windows 7 Ultimate SP1
 - Microsoft Windows 7 Enterprise SP1 (standard installation)
 - Microsoft Windows Server 2008 R2

Selection and ordering data

	Article No.
STARTER commissioning tool for SINAMICS and MICROMASTER German, English, French, Italian, Spanish	6SL3072-0AA00-0AG0

SINAMICS DC MASTER can be configured with STARTER version 4.1 and higher with Service Pack 5, Hotfix 1. The current STARTER version as well as updates can be downloaded from the Internet at <http://support.automation.siemens.com/WW/view/en/10804985/133100> and are provided on the product DVD supplied with each unit.

Accessories

Connection

Depending on the version of the Control Unit, the Control Unit (CU) of the drive unit can communicate with the programming device (PG) or PC via a serial interface, PROFIBUS, or Ethernet/PROFINET. The following accessories are available for the particular drive system as listed in the following table.

	Article No.
PROFIBUS communication module CP 5711 USB adapter for connecting a PG or notebook to PROFIBUS or MPI USB cable (2 m) included in scope of supply	6GK1571-1AA00
SIMATIC DP connecting cable 12 MBaud, for PG connector, pre-assembled with 2 × 9-pin Sub-D connector, 3 m	6ES7901-4BD00-0XA0



SINAMICS DCM

Tools and engineering

Drive Control Chart (DCC)

Overview

Graphically configuring and expanding the device functionality using the freely available closed-loop control, arithmetic, and logic blocks

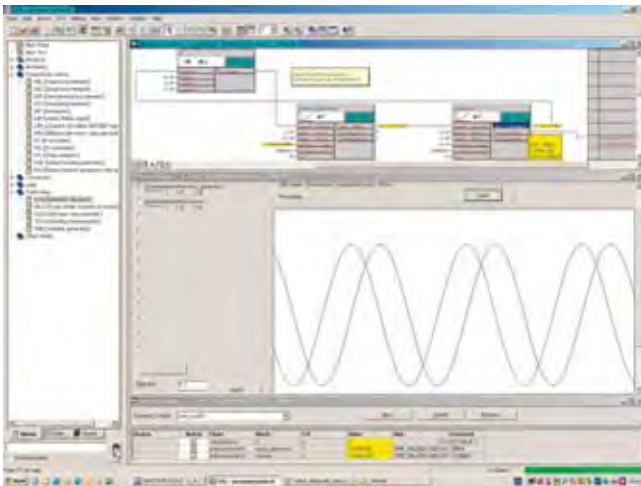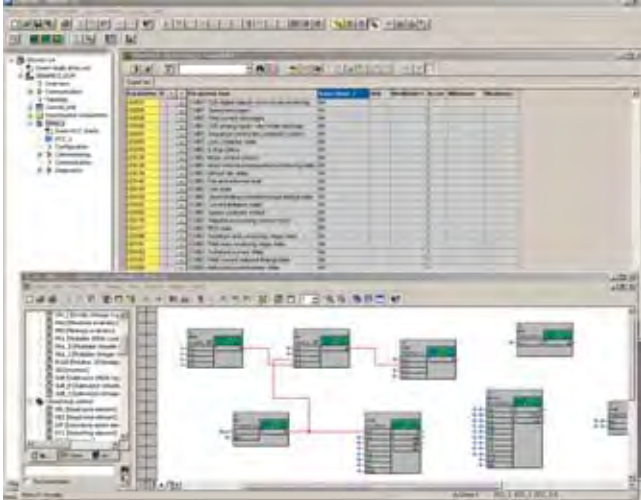

Drive Control Chart (DCC) extends the possibility of very simply configuring technological functions – both for the SIMOTION Motion Control System as well as for the SINAMICS DC MASTER drive system. For users, this opens up a new dimension regarding the adaptability of the systems mentioned to the specific functions of their machines. DCC has no restrictions with regard to the number of usable functions; this is only limited by the performance capability of the target platform.

The user-friendly DCC editor enables easy graphics-based configuration, allows control loop structures to be clearly represented and provides a high degree of reusability of diagrams that have already been created.

The open-loop and closed-loop control functions are defined by using multi-instance-capable blocks (Drive Control Blocks (DCBs)) from a pre-defined library (DCB library) that are selected and graphically linked with one another by dragging and dropping. Test and diagnostic functions allow the program behavior to be verified and in the case of a fault, the cause identified.

The block library encompasses a large selection of closed-loop, arithmetic and logic blocks, as well as comprehensive open-loop and closed-loop control functions.

For logically combining, evaluating and acquiring binary signals, all commonly used logic functions are available for selection (AND, XOR, on/off delay, RS flipflop, counter, etc.). A wide range of arithmetic functions, such as absolute value generation, dividers and minimum/maximum evaluation are available to monitor and evaluate numerical quantities. In addition to the closed-loop drive control, axial winder functions, closed-loop PI controller, ramp function generator or wobble generator can be configured simply and easily.

Closed-loop control structures can be programmed with almost no restrictions in conjunction with the SIMOTION Motion Control System. These can then be combined with other program sections to form an overall program.

Further, Drive Control Chart for SINAMICS DC MASTER provides a user-friendly basis to handle drive-related open-loop and closed-loop control tasks directly in the converter. This further extends the possibility of adapting SINAMICS to the particular application. Local data processing in the drive supports the implementation of modular machine concepts and results in an increase in the overall machine performance.

Minimum hardware and software requirements

See the SCOUT or STARTER engineering software, since DCC is installed in addition to this.

Selection and ordering data

DCC comprises the graphic configuring tool (DCC Editor) and the block library (DCB Library).

DCC is installed in addition to the STARTER commissioning tool.


The necessary engineering license for each PC (floating) for DCC is acquired at the same time the order is placed; additional runtime licenses are not required.

Existing licenses for DCC version V2.1 can also be used for DCC V2.2 SP1.

An upgrade variant for the engineering license can be selected for existing DCC V2.0 versions.

	Article No.
DCC-SIMOTION/SINAMICS V2.2 SP1 for SCOUT/STARTER V4.3 SP1, SP2 and SP3 Graphic configuration with Drive Control Chart DCC editor + DCB library for use on SIMOTION and SINAMICS S120/S150/G130/G150/DCM	
<ul style="list-style-type: none"> • Single-user engineering license, with data carrier 	6AU1810-1JA22-1XA0
<ul style="list-style-type: none"> • Upgrade engineering license, with data carrier 	6AU1810-1JA22-1XE0
DCC-SINAMICS V2.2 SP1 for STARTER V4.3 SP1 Graphic configuration with Drive Control Chart DCC editor + DCB library for use on SINAMICS S120/S150/G130/G150/DCM	
<ul style="list-style-type: none"> • Single-user engineering license, with data carrier 	6AU1810-1HA22-1XA0
<ul style="list-style-type: none"> • Upgrade engineering license, with data carrier 	6AU1810-1HA22-1XE0

Overview

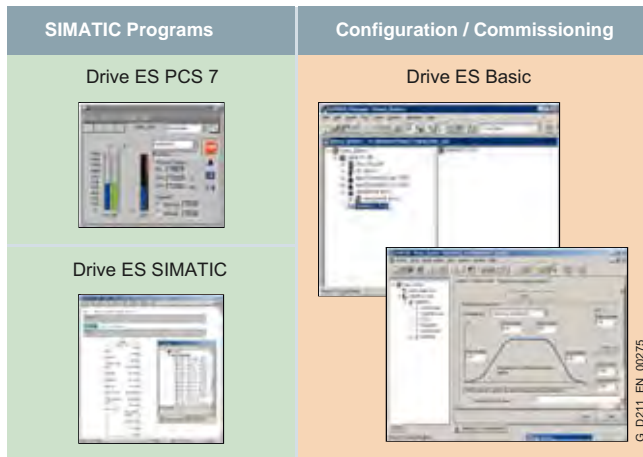

Drive ES is the engineering system used to integrate Siemens drive technology into the SIMATIC automation world easily, efficiently and cost-effectively in terms of communication, configuration and data management.

It is based on the operator interface of the STEP 7 Manager, the essential element when it comes to engineering.

Various software packages are available:

- Drive ES Basic
- Drive ES SIMATIC
- Drive ES PCS 7

Application

The Drive ES (**Drive Engineering Software**) engineering software fully integrates drives from Siemens into the world of Totally Integrated Automation.

The table provides a general overview of the Drive ES software packages available for each drive.

Drive	Drive ES Basic V5.4 and higher	Drive ES SIMATIC V5.4 and higher	Drive ES PCS 7 V6.0 and higher
SIMOVERT MASTERDRIVES	●	●	●
SIMOREG DC-MASTER	●	●	●
SIMODRIVE 611 universal HRS	●	●	
SIMODRIVE POSMO A/SI/CD/CA	●	●	
MICROMASTER/MIDIMASTER/COMBIMASTER Third generation	●	●	●
MICROMASTER 4 Fourth generation	●	●	●
SINAMICS S110	●	●	
SINAMICS S120	●	●	● ¹⁾
SINAMICS S150	●	●	● ¹⁾
SINAMICS G120	●	●	● ¹⁾
SINAMICS G120D	●	●	● ¹⁾
SINAMICS G130	●	●	● ¹⁾
SINAMICS G150	●	●	● ¹⁾
SINAMICS GL150	●	●	● ¹⁾
SINAMICS GM150	●	●	● ¹⁾
SINAMICS SM150	●	●	● ¹⁾
SINAMICS DC MASTER	● ²⁾	● ³⁾	On request

¹⁾ Drive ES PCS 7 V6.0 SP2 and higher.

²⁾ Drive ES Basic V5.4 SP5 and higher.

Design

Various software packages are available:

- Drive ES Basic
- Drive ES SIMATIC
- Drive ES PCS 7

Drive ES Basic

Drive ES Basic is for first-time users of the world of Totally Integrated Automation and the basic software for setting the parameters of all drives online and offline in this environment. Drive ES Basic enables both the automation system and the drives to be handled using the SIMATIC Manager user interface. Drive ES Basic is the starting point for common data archiving for complete projects and for extending the use of the SIMATIC routing and teleservice to drives. Drive ES Basic provides the engineering tools for the new Motion Control functions, slave-to-slave communication, equidistant mode and clock cycle synchronization with PROFIBUS DP and ensures that drives with PROFINET IO are simply integrated into the SIMATIC environment.

Drive ES SIMATIC

Drive ES SIMATIC is used for simple parameterization of STEP 7 communication instead of time-consuming programming. It requires STEP 7 to be installed. It features a SIMATIC function block library, thereby making the programming of the PROFIBUS and/or PROFINET IO interface in the SIMATIC CPU for the drives easy and secure.

There is no need for separate, time-consuming programming of the data exchange between the SIMATIC CPU and the drive. All Drive ES users need to remember is:

Copy – Modify – Load – Finished.

Customized, fully-developed function blocks are copied from the library into user-specific projects.

Frequently used functions are set to run in program format:

- Read out complete diagnostics buffer automatically from the drive
- Download complete parameter sets automatically from the SIMATIC CPU into the drive, e.g. when a device has to be replaced
- Automatically download partial parameter sets (e.g. for recipe or product change) from the SIMATIC CPU to the drive
- Upload the complete parameter assignment or partial parameter sets from the drive to the SIMATIC CPU, i.e. update.

³⁾ Drive ES SIMATIC V5.4 SP3 and higher.

SINAMICS DCM

Tools and engineering

Drive ES engineering software

Design (continued)

Detailed contents of the Drive ES SIMATIC package

- **"PROFIBUS DP" communications software** for SIMATIC S7-300 with CPUs with integrated DP interface (DRVDP57, POSMO function block libraries), SIMATIC S7-400 with CPUs with integrated DP interface or with CP 443-5 (DRVDP57, POSMO function block libraries) and SIMATIC S7-300 with CP 342-5 (DRVDP57C function block library)
- **"USS protocol" communications software** for SIMATIC S7-300 with integral PtP interfaces or with CP 340/341 and SIMATIC S7-400 with CP 441 (DRVUSS7 function block library)
- **STEP 7 slave object manager** for convenient configuration of drives and for non-cyclic PROFIBUS DP communication with the drives
- **STEP 7 device object manager** for easy configuration of drives with PROFINET IO interfaces (V5.4 and higher)
- **SETUP program** for installing the software in the STEP 7 environment
- **"PROFINET IO" communications software** for SIMATIC S7-300 with CPUs with integrated PN interface, SIMATIC S7-400 with CPUs with integrated PN interface or with CP (DRVDP57 function block library, respectively). PROFINET IO and PROFIBUS DP use the same blocks from the DRVDP57 library, i.e. the blocks are able to serve both buses with a common block (only for V5.4 and higher)

Drive ES PCS 7

Drive ES PCS 7 links the drives with a PROFIBUS DP interface into the SIMATIC PCS 7 process control system, and it requires that SIMATIC PCS 7, V6.1 and higher has first been installed. Drive ES PCS 7 provides a function block library with function blocks for the drives and the corresponding faceplates for the operator station which enables the drives to be operated from the PCS 7 process control system. From version V6.1 and higher, drives will also be able to be represented in the PCS 7 Maintenance Station.

Detailed contents of the Drive ES PCS 7 package

- **Function block library for SIMATIC PCS 7** Faceplates and control blocks for SIMOVERT MASTERDRIVES VC and MC, as well as MICROMASTER/MIDIMASTER of the third and fourth generation and SIMOREG DC-MASTER and SINAMICS
- **STEP 7 slave object manager** for convenient configuration of drives and for non-cyclic PROFIBUS DP communication with the drives
- **SETUP program** for installing the software in the PCS 7 environment

Selection and ordering data

Description	Article No.
Drive ES Basic V5.5 SPx ¹⁾ Configuration software for the integration of drives into TIA (Totally Integrated Automation) Requirement: STEP 7 from V5.3, SP3 and higher Supplied as: DVD Languages: Ger, Eng, Fr, It, Sp with electronic documentation	
• Floating license, 1 user	6SW1700-5JA00-5AA0
• Floating license (copy license), 60 users	6SW1700-5JA00-5AA1
• Update service for single-user license	6SW1700-0JA00-0AB2
• Update service for copy license, 60 users	6SW1700-0JA00-1AB2
• Upgrade from V5.x to V5.5 SPx ¹⁾	6SW1700-5JA00-5AA4
Drive ES SIMATIC V5.5 SPx ¹⁾ Function block library for SIMATIC for the parameterization of communication with the drives Requirement: STEP 7 from V5.3, SP3 and higher Supplied as: CD-ROM Languages: Ger, Eng, Fr, It, Sp with electronic documentation	
• Single-user license incl. 1 runtime license	6SW1700-5JC00-5AA0
• Runtime license (without data carrier)	6SW1700-5JC00-1AC0
• Upgrade from V5.x to V5.5 SPx ¹⁾	6SW1700-5JC00-5AA4
Drive ES PCS 7 V6.1 SPx ¹⁾ Function block library for PCS 7 for the integration of drives Requirement: PCS 7 V6.1 and higher Supplied as: CD-ROM Languages: Ger, Eng, Fr, It, Sp with electronic documentation	
• Single-user license incl. 1 runtime license	6SW1700-6JD00-1AA0
• Runtime license (without data carrier)	6SW1700-5JD00-1AC0
• Update service for single-user license	6SW1700-0JD00-0AB2
Drive ES PCS 7 V7.0 SPx ¹⁾ Function block library for PCS 7 for the integration of drives Requirement: PCS 7 V7.0 and higher Supplied as: CD-ROM Languages: Ger, Eng, Fr, It, Sp with electronic documentation	
• Single-user license incl. 1 runtime license	6SW1700-7JD00-0AA0
• Runtime license (without data carrier)	6SW1700-5JD00-1AC0
• Update service for single-user license	6SW1700-0JD00-0AB2
• Upgrade from V5.x to V7.0 SPx ¹⁾	6SW1700-7JD00-0AA4
Drive ES PCS 7 V7.1 SPx ¹⁾ Function block library for PCS 7 for the integration of drives Requirement: PCS 7 V7.1 and higher Supplied as: CD-ROM Languages: Ger, Eng, Fr, It, Sp with electronic documentation	
• Single-user license incl. 1 runtime license	6SW1700-7JD00-1AA0
• Runtime license (without data carrier)	6SW1700-5JD00-1AC0
• Update service for single-user license	6SW1700-0JD00-0AB2
• Upgrade from V6.x to V7.1 SPx ¹⁾	6SW1700-7JD00-1AA4

¹⁾ Orders are automatically supplied with the latest Service Pack (SP).

Selection and ordering data (continued)

Description	Article No.
Drive ES PCS 7 V8.0 SPx ¹⁾ Function block library for PCS 7 for the integration of drives in Classic Style (as predecessor) Requirement: PCS 7 V8.0 and higher Supplied as: CD-ROM Languages: Ger, Eng, Fr, It, Sp with electronic documentation	
<ul style="list-style-type: none"> • Single-user license incl. 1 runtime license 	6SW1700-8JD00-0AA0
<ul style="list-style-type: none"> • Runtime license (without data carrier) 	6SW1700-5JD00-1AC0
<ul style="list-style-type: none"> • Update service for single-user license 	6SW1700-0JD00-0AB2
<ul style="list-style-type: none"> • Upgrade from V6.x to V8.0 SPx ¹⁾ 	6SW1700-8JD00-0AA4
Drive ES PCS 7 APL V8.0 SPx ¹⁾ Function block library for PCS 7 for the integration of drives in APL style Requirement: PCS 7 V8.0 and higher Supplied as: CD-ROM Languages: Ger, Eng, Fr, It, Sp with electronic documentation	
<ul style="list-style-type: none"> • Single-user license incl. 1 runtime license 	6SW1700-8JD01-0AA0
<ul style="list-style-type: none"> • Runtime license (without data carrier) 	6SW1700-5JD00-1AC0
<ul style="list-style-type: none"> • Update service for single-user license 	6SW1700-0JD00-0AB2

Options

Drive ES software update service

A software update service can also be purchased for the Drive ES software. The user will automatically receive the latest software, service packs and full versions for one year after ordering.

The update service can only be ordered in addition to an existing (i.e. previously ordered) full version.

- Period of update service: 1 year

The update service is automatically extended by 1 further year unless canceled up to 6 weeks prior to expiration.

Description	Article No.
Drive ES Basic <ul style="list-style-type: none"> • Update service for single-user license 	6SW1700-0JA00-0AB2
<ul style="list-style-type: none"> • Update service for copy license 	6SW1700-0JA00-1AB2
Drive ES PCS 7 <ul style="list-style-type: none"> • Update service for single-user license 	6SW1700-0JD00-0AB2

More information

More information is available on the Internet at:
www.siemens.com/drivesolutions

¹⁾ Orders are automatically supplied with the latest Service Pack (SP).

SINAMICS DCM

Tools and engineering

Notes

6

Services and documentation

7



7/2	SINAMICS DCM demonstration case
7/2	Overview
7/2	Application
7/2	Function
7/2	Technical specifications
7/2	Selection and ordering data
7/3	Siemens Industry Training
7/3	Overview
7/3	<ul style="list-style-type: none"> • Faster and more applicable know-how: Hands-on training from the manufacturer
7/3	<ul style="list-style-type: none"> • Highlights Siemens Industry Training
7/4	Range of training courses
7/4	Overview
7/4	<ul style="list-style-type: none"> • SINAMICS DCM Servicing
7/4	<ul style="list-style-type: none"> • SINAMICS DCM Service and commissioning
7/5	<ul style="list-style-type: none"> • SINAMICS DCM Upgrade for SIMOREG experts
7/5	<ul style="list-style-type: none"> • SIMOREG DC-MASTER Servicing
7/6	Industry Services
7/7	Industry Services for the entire life cycle
7/7	<ul style="list-style-type: none"> • Online Support
7/7	<ul style="list-style-type: none"> • Technical Support
7/8	<ul style="list-style-type: none"> • Spare Parts
7/8	<ul style="list-style-type: none"> • Repair Services
7/8	<ul style="list-style-type: none"> • Field Services
7/9	<ul style="list-style-type: none"> • Training
7/9	<ul style="list-style-type: none"> • Technical Consulting & Engineering Support
7/9	<ul style="list-style-type: none"> • Energy & Environmental Services
7/10	<ul style="list-style-type: none"> • Modernization & Optimization Services
7/10	<ul style="list-style-type: none"> • Plant Maintenance & Condition Monitoring
7/10	<ul style="list-style-type: none"> • Service Contracts
7/11	Documentation
7/11	More information
7/11	Selection and ordering data

SINAMICS DCM

Services and documentation

SINAMICS DCM demonstration case

Overview



Demonstration case, opened

The SINAMICS DC MASTER demonstration model is installed ready to be connected-up in a rugged transport case and is immediately ready for operation. It comprises a DC converter 480 V 3 AC, DC 30 A, a 0.55 kW DC motor as well as numerous options and accessories. The case has two integrated transport wheels and a hinged handle.

Scope of delivery

The following main components are included in the SINAMICS DC MASTER demonstration case, including all of the required wiring, connection and signal cables:

- DC converter 6RA8018-6FV62-0AA0-Z;
Z=G00+G10+G20+S01+L05
G00 = Advanced CUD left
G10 = Standard CUD right
G20 = Communication Board CBE20 left
S01 = Memory card left
L05 = Electronics power supply for connection to 24 V DC

Option L05 permits operation on a three-phase line supply or a single-phase line supply, e.g. 230 V. Presentations or training courses can be carried out locally without requiring a three-phase supply; for instance in hotels or office buildings.

- TM31 Terminal Module
- TM15 Terminal Module
- AOP30 Advanced Operator Panel
- Radio interference suppression filter
- Three-phase commutating reactor for the armature circuit
- Single-phase commutating reactor for the field circuit
- DC motor 0.55 kW, 1750 rpm
- Pulse encoder OG 60 DN 2040 CI
- Analog tachometer GT 5.05 L/410, $V_0 = 10 \text{ V}/1000 \text{ rpm}$
- Commissioning box for SINAMICS DC MASTER to control analog and digital inputs and outputs

Free function blocks and Drive Control Chart can be used without any restrictions.

The demonstration case is also available without integrated DC motor to operate an externally mounted DC motor. (The rated converter data must be observed.)

Application

- Demonstrating DC drives to customers
- Training Siemens employees and customers
- Test configurations

An automation group using a SIMATIC demonstration case together with one or several SINAMICS DC MASTER demonstration cases can be implemented.

Function

Operation

The converter can be operated from:

- the commissioning box, which is connected to the terminals of the unit or the TM15 and TM31
- the AOP30 operator panel
- the PROFIBUS interface
- the PROFINET interface

A description is provided with the demonstration case. This clearly shows the principle operator panel design and the possible functions of the operator controls.

To use the STARTER commissioning tool, users require a programming device or PC. The system requirements are described in section STARTER.

Technical specifications

SINAMICS DCM demonstration case

Line supply connection

Supply voltage	110 ... 480 V 3 AC (+15 %/-20 %) or 110 ... 480 V 1 AC (+15 %)
Rated frequency	45 ... 65 Hz
Connecting cables	with 16 A Cecon connector (5UR5076 3), length approx. 4 m and a 0.7 m long adapter cable with Cecon socket and connector with ground connection
Line connection fusing required	16 A

Dimensions and weights

Width	approx. 680 mm
Height	approx. 700 mm
Depth	approx. 430 mm
Weight with integrated DC motor	approx. 70 kg
Weight without motor	approx. 55 kg

Selection and ordering data

SINAMICS DCM demonstration case

Description	Order No.
With integrated DC motor	6RX1800-0SM00
Without motor	6RX1800-0SV00

The demonstration case with integrated DC motor is also available for rental.

Please contact your regional Siemens sales person.

Faster and more applicable know-how: Hands-on training from the manufacturer

Siemens Industry Training provides you with comprehensive support in solving your tasks.

Training by the market leader in the industry enables you to make independent decisions with confidence. Especially where the optimum and efficient use of products and plants are concerned. You can eliminate deficiencies in existing plants, and exclude expensive faulty planning right from the beginning.



First-class know-how directly pays for itself: In shorter startup times, high-quality end products, faster troubleshooting and reduced downtimes. In other words, increased profits and lower costs.

Achieve more with Siemens Industry Training

- Shorter times for startup, maintenance and servicing
- Optimized production operations
- Reliable configuration and startup
- Minimization of plant downtimes
- Flexible plant adaptation to market requirements
- Compliance with quality standards in production
- Increased employee satisfaction and motivation
- Shorter familiarization times following changes in technology and staff

Contact

Visit our site on the Internet at:

www.siemens.com/sitrain

or let us advise you personally.

Siemens Industry Training Customer Support Germany:

Phone: +49 (911) 895-7575

Fax: +49 (911) 895-7576

E-Mail: info@sitrain.com

Highlights Siemens Industry Training

Top trainers

Our trainers are skilled teachers with direct practical experience. Course developers have close contact with product development, and directly pass on their knowledge to the trainers.

Practical experience

The practical experience of our trainers enables them to teach theory effectively. But since theory can be pretty drab, we attach great importance to practical exercises which can comprise up to half of the course time. You can therefore immediately implement your new knowledge in practice. We train you on state-of-the-art methodically/didactically designed training equipment. This training approach will give you all the confidence you need.

Wide variety

With a total of about 300 local attendance courses, we train the complete range of Siemens Industry products as well as interaction of the products in systems.

Tailor-made training

We are only a short distance away. You can find us at more than 50 locations in Germany, and in 62 countries worldwide. You wish to have individual training instead of one of our 300 courses? Our solution: We will provide a program tailored exactly to your personal requirements. Training can be carried out in our Training Centers or at your company.

The right mixture: Blended learning

"Blended learning" is a combination of various training media and sequences. For example, a local attendance course in a Training Center can be optimally supplemented by a teach-yourself program as preparation or follow-up. Additional effect: Reduced traveling costs and periods of absence.



SINAMICS DCM

Services and documentation

Range of training courses

Overview

SINAMICS DCM Servicing

Description/learning objective

Unplanned stoppages of production machines can cost a lot of money.

In this course you will learn the proper way to handle the SINAMICS DC MASTER DC converter. You will be able to adapt the parameter assignment and carry out data backups for modifications to the system. In the event of failures you will be in a better position to analyze the faults and to clear them more quickly. That will save time and money.

Target group

Service personnel, maintenance personnel

Preconditions

Basic knowledge of electrical engineering

Content

- Structure and function of the SINAMICS DC MASTER converter
- Changing parameters, backing up data and performing diagnostics with:
 - BOP20 and AOP30 operator panels
 - STARTER PC program
- Using the memory card
- Establishing the signal flow using function charts:
 - Setpoint channel
 - Inputs and outputs
 - Interfaces to fieldbuses
- Checking the operating state and enable signals
- Test mode with STARTER:
 - Operation with the control panel
 - Recording of signals using the trace function
 - Triggering for faults and bit patterns
- Use of the trend recorder function for long-term recording
- Analysis of alarms and fault messages
- Read-out of the diagnostic memory
- Thyristor diagnostics service function
- Replacement of Control Unit, fan and fuses
- Information on servicing DC motors
- Practical exercises on training equipment with SINAMICS DC MASTER

Note:

The replacement of components is communicated in accordance with the operating instructions and the purchasable spare parts. If required, complete repairs of the converter can be performed by Siemens Customer Support.

Duration	5 days	Order code:	DR-DCM-IH
-----------------	--------	--------------------	-----------

SINAMICS DCM Service and commissioning

Description/learning objective

This training course explains how you adapt the parameter settings of the converter to the application and the DC motor. You expand your theoretical knowledge in the form of exercises carried out on special training equipment. After participating in the course, you know the functions of a converter and the interfaces. You are in a position to safely and quickly commission the unit. Through routine fault diagnostics and troubleshooting, you save time and optimize the availability of your plant or system.

Target group

Commissioning engineers, project engineers, service personnel

Preconditions

Basic knowledge of electrical engineering

Content

- Design and function of the SINAMICS DC MASTER converter: Control module CUD, power section, field circuit, interfaces
- Commissioning and parameterizing using the BOP20 and AOP30 operator panels and the STARTER PC program
- Using the memory card: Structure and data backup
- Procedure when commissioning, checking functions
- Optimizing the closed-loop current and speed control, automatic optimization
- Function diagrams: Setpoint channel, inputs and outputs, free function blocks
- Information on Drive Control Chart DCC
- Drive interface to PROFIBUS / PROFINET
- Expanding the system using Terminal Modules and Sensor Modules via DRIVE-CLiQ
- Parallel connection and peer-to-peer coupling
- Operating states, alarms and fault messages
- Service functions: Trace, measuring functions, diagnostics memory
- Practical exercises using AOP30 and STARTER on training equipment

Duration	5 days	Order code:	DR-DCM-SI
-----------------	--------	--------------------	-----------

Overview (continued)***SINAMICS DCM Upgrade for SIMOREG experts***Description/learning objective

You already have good know-how on the previous SIMOREG DC-MASTER unit. This training course explains how you adapt the parameter settings of the SINAMICS DC MASTER to the application and the motor. You expand your theoretical knowledge in the form of exercises carried out on special training equipment. After participating in the course, you know the functions of a converter and the interfaces. You are in a position to safely and quickly commission the unit. Through routine fault diagnostics and troubleshooting, you save time and optimize the availability of your plant or system.

Target group

Commissioning engineers, project engineers, service personnel

Preconditions

Good knowledge about SIMOREG 6RA70

Content

- Design of the SINAMICS DC MASTER converter: Control module CUD, power section, field circuit, interfaces
- Commissioning and parameterizing using the BOP20 and AOP30 operator panels and the STARTER PC program
- Using the memory card: Structure and data backup
- Function diagrams: Setpoint channel, inputs and outputs, free function blocks
- Information on Drive Control Chart DCC
- Drive interface to PROFIBUS / PROFINET
- Expanding the system using Terminal Modules and Sensor Modules via DRIVE-CLiQ
- Parallel connection and peer-to-peer coupling
- Operating states, alarms and fault messages
- Service functions: Trace, measuring functions, diagnostics memory
- Practical exercises using AOP30 and STARTER on training equipment

Duration 3 days **Order code:** DR-DCM-U

SIMOREG DC-MASTER ServicingDescription/learning objective

As a maintenance engineer you learn to quickly detect and localize faults in SIMOREG DC-MASTER DC drives, to understanding the principles of operation and function of a drive control in order to select the best measures for fault rectification and to rectify simple faults. You achieve the ability to check the faultless operation of the drive.

Target group

Maintenance personnel

Preconditions

Basic knowledge of electrical engineering

Content

Principle of operation, structure and function of DC motors:

- DC shunt motor
- Thyristor power controller
- Binector configuration
- Software structure, control and regulation

Troubleshooting:

- Faults due to overloading
- Faults in the drive control
- Interpretation of device internal fault messages
- Localize faults with a diagnostics tool (DriveMonitor)
- Measures for motor replacement
- Procedure for the exchange of a processor and printed circuit boards
- Check correct functioning
- Compiling and evaluating fault information
- Preventative measures against future failures: Cause analysis, possible preventative measures

Duration 5 days **Order code:** DR-DC70-IH

SINAMICS DCM

Services and documentation

Industry Services




Your machines and plant can do more – with Industry Services.

Whether it is production or process industry - in view of rising cost pressure, growing energy costs, and increasingly stringent environmental regulations, services for industry are a crucial competitive factor in manufacturing as well as in process industries.

All over the world Siemens supports its customers with product, system, and application-related services throughout the entire life cycle of a plant. Right from the earliest stages of planning, engineering, and building, all the way to operation and modernization. These services enable customers to benefit from the Siemens experts' unique technological and product knowledge and industry expertise.

Thus downtimes are reduced and the utilization of resources is optimized. The bottom line: increased plant productivity, flexibility, and efficiency, plus reduced overall costs.

Discover all advantages of our service portfolio:
www.siemens.com/industry-services

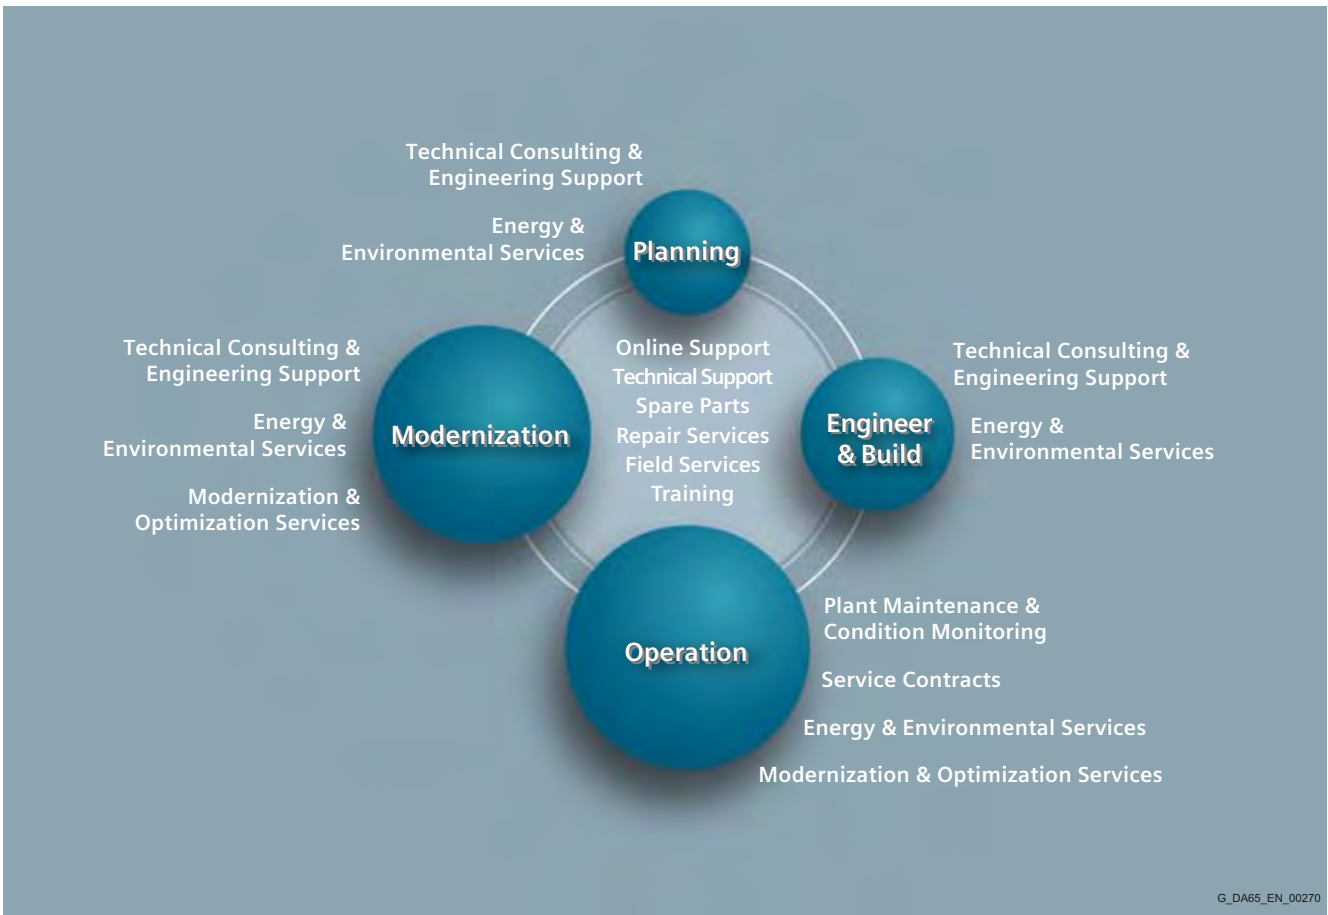

G_DA65_EN_00270

Siemens supports its clients with technology based Services across a plants entire life cycle.

Online Support

Online support is a comprehensive information system for all questions relating to products, systems, and solutions that Siemens has developed for industry over time. With more than 300,000 documents, examples and tools, it offers users of automation and drive technology a way to quickly find up-to-date information. The 24-hour service enables direct, central access to detailed product information as well as numerous solution examples for programming, configuration and application.

The content, in six languages, is increasingly multimediated – and now also available as a mobile app. Online support's "Technical Forum" offers users the opportunity to share information with each other. The "Support Request" option can be used to contact Siemens' technical support experts. The latest content, software updates, and news via newsletters and Twitter ensure that industry users are always up to date.



www.siemens.com/industry/online-support

Online Support App



Using the Online Support app, you can access over 300,000 documents covering all Siemens industrial products - anywhere, any time. Regardless of whether you need help implementing your project, fault-finding, expanding your system or are planning a new machine.

You have access to FAQs, manuals, certificates, characteristics curves, application examples, product notices (e.g. announcements of new products) and information on successor products in the event that a product is discontinued.

Just scan the product code printed on the product directly using the camera of your mobile device to immediately see all technical information available on this product at a glance. The graphical CAx information (3D model, circuit diagrams or EPLAN macros) is also displayed. You can forward this information to your workplace using the e-mail function.

The search function retrieves product information and articles and supports you with a personalized suggestion list. You can find your favorite pages – articles you need frequently – under "mySupport". You also receive selected news on new functions, important articles or events in the News section.

Scan the QR code
for information on
our Online Support
app.



The app is available free of charge from the Apple App Store (iOS) or from Google Play (Android).

www.siemens.com/industry/online-support-app

Technical Support

The ability to quickly analyze system and error messages and take appropriate action are key factors in ensuring that plants run safely and efficiently. Questions can arise at any time and in any industry, whether it's an individual product or a complete automation solution. Siemens technical support offers individual technical assistance in matters related to functionality, how to operate, applications, and fault clearance in industrial products and systems – at any time and globally, over the phone, by e-mail, or via remote access. Experienced experts from Siemens answer incoming questions promptly. Depending on the requirements, they first consult specialists in the areas of development, on-site services, and sales. Technical support is also available for discontinued products that are no longer available. Using the support request number, any inquiry can be clearly identified and systematically tracked.



<http://support.automation.siemens.com/WW/view/en/16605032>

SINAMICS DCM

Services and documentation

Industry Services for the entire life cycle

Spare Parts

Drive and automation systems must be available at all times. Even a single missing spare part can bring the entire plant to a standstill – and result in substantial financial losses for the operator. The spare parts services from Siemens protects against such losses – with the aid of quickly available, original spare parts that ensure smooth interaction with all other system components. Spare parts are kept on hand for up to ten years; defective parts can be returned. For many products and solutions, individual spare parts packages ensure a preventive stock of spare parts on-site. The spare parts services is available around the world and around the clock. Optimum supply chain logistics ensure that replacement components reach their destination as quickly as possible. Siemens' logistics experts take care of planning and management as well as procurement, transportation, customs handling, warehousing, and complete order management for spare parts.



<http://support.automation.siemens.com/WWW/view/en/43502238>

Repair Services

Reliable electrical and electronic equipment is crucial for operating continuous processes. That is why it is essential that motors and converters always undergo highly specialized repair and maintenance. Siemens offers complete customer and repair services – on site and in repair centers – as well as technical emergency services worldwide. The repair services include all measures necessary to quickly restore the functionality of defective units. In addition, services such as spare parts logistics, spare parts storage and rapid manufacturing are available to plant operators in all verticals. With a global network of certified repair shops operated by Siemens as well as third parties, Siemens handles the maintenance and overhaul of motors, converters, and other devices as an authorized service partner.



<http://support.automation.siemens.com/WWW/view/en/43512848>

Field Services

It's a top priority in all industries: the availability of plants and equipment. Siemens offers specialized maintenance services such as inspection and upkeep as well as rapid fault clearance in industrial plants – worldwide, continuously, and even with emergency services as needed. The services include startup as well as maintenance and fault clearance during operation. The startup service includes checking the installation, function tests, parameterization, integration tests for machines and plants, trial operation, final acceptance, and employee training. All services, including remote maintenance of drives, are also available as elements of customized service contracts.



<http://support.automation.siemens.com/WWW/view/en/66012486>

Training

Increasingly, up-to-date knowledge is becoming a determining factor in success. One of the key resources of any company is well-trained staff that can make the right decision at the right moment and take full advantage of the potential. With SITRAIN – Training for Industry, Siemens offers comprehensive advanced training programs. The technical training courses convey expertise and practical knowledge directly from the manufacturer. SITRAIN covers Siemens' entire product and system portfolio in the field of automation and drives. Together with the customer, Siemens determines the company's individual training needs and then develops an advanced training program tailored to the desired requirements. Additional services guarantee that the knowledge of all Siemens partners and their employees is always up-to-date.



<http://support.automation.siemens.com/WWW/view/en/43514324>

Technical Consulting & Engineering Support

The efficiency of plants and processes leads to sustainable economic success. Individual services from Siemens help save substantial time and money while also guaranteeing maximum safety. Technical consulting covers the selection of products and systems for efficient industrial plants. The services include planning, consulting, and conceptual design as well as product training, application support, and configuration verification – in all phases of a plant's lifecycle and in all questions related to product safety. Engineering support offers competent assistance throughout the entire project, from developing a precise structure for startup to product-specific preparation for implementation as well as support services in areas such as prototype development, testing and acceptance.



<http://support.automation.siemens.com/WWW/view/en/16605680>

Energy & Environmental Services

Efficient energy use and resource conservation – these top sustainability concerns pay off – both for the environment and for companies. Siemens offers integrated solutions that unlock all technical and organizational potential for successful environmental management. Customized consulting services are aimed at sustainably lowering the cost of energy and environmental protection and thus increasing plant efficiency and availability. The experts provide support in the conceptual design and implementation of systematic solutions in energy and environmental management, enabling maximum energy efficiency and optimized water consumption throughout the entire company. Improved data transparency makes it possible to identify savings potential, reduce emissions, optimize production processes, and thereby noticeably cut costs.



<http://support.automation.siemens.com/WWW/view/en/42350774>

SINAMICS DCM

Services and documentation

Industry Services for the entire life cycle

Modernization & Optimization Services

High machine availability, expanded functionality and selective energy savings – in all industries, these are decisive factors for increasing productivity and lowering costs. Whether a company wants to modernize individual machines, optimize drive systems, or upgrade entire plants, Siemens' experts support the projects from planning to commissioning.

Expert consulting and project management with solution responsibility lead to security and make it possible to specifically identify savings potential in production. This secures investments over the long term and increases economic efficiency in operation.



<http://support.automation.siemens.com/WW/view/en/66005532>

Plant Maintenance & Condition Monitoring

Modern industrial plants are complex and highly automated. They must operate efficiently in order to ensure the company's competitive strength. In addition, the steadily increasing networking of machines and plants require consistent security concepts. Maintenance and status monitoring as well as the implementation of integrated security concepts by Siemens' experts support optimum plant use and avoid downtime. The services include maintenance management as well as consulting on maintenance concepts, including the complete handling and execution of the necessary measures. Complete solutions also cover remote services, including analysis, remote diagnosis, and remote monitoring. These are based on the Siemens Remote Services platform with certified IT security.



<http://support.automation.siemens.com/WW/view/en/59456862>

Service Contracts

Making maintenance costs calculable, reducing interfaces, speeding up response times, and unburdening the company's resources – the reduced downtimes that these measures achieve increase the productivity of a plant. Service contracts from Siemens make maintenance and repairs more cost-effective and efficient. The service packages include local and remote maintenance for a system or product group in automation and drive technology. Whether you need extended service periods, defined response times, or special maintenance intervals, the services are compiled individually and according to need. They can be adjusted flexibly at any time and used independently of each other. The expertise of Siemens' specialists and the capabilities of remote maintenance thus ensure reliable and fast maintenance processes throughout a plant's entire lifecycle.



<http://support.automation.siemens.com/WW/view/en/65961857>

More information

Documentation is supplied as standard on DVD together with the converter.

The documentation can be additionally ordered as hard copy in the languages specified here.

Documentation for SINAMICS DC MASTER

The standard languages of the documentation on DVD are German, English, French, Spanish, Italian, Russian and Chinese.

The technical documentation includes the following manuals:

- SINAMICS DC MASTER DC Converter Operating Instructions
- SINAMICS DC MASTER Control Module Operating Instructions
- List Manual (parameter list and function diagrams)
- Function Manual SINAMICS Free Function Blocks ¹⁾

The following additional documentation and information are provided on the DVD:

- Safety instructions
- Applications
- Accessories
- Function diagrams in VISIO format (vsd)
- Dimensional drawings in dxf and pdf formats
- STARTER commissioning tool
- Spare parts, link to SparesOnWeb (Internet)
- Service, Technical Support
- Certifications
- Link to latest firmware (Internet)
- Configuring notes regarding dynamic overload capability
- List of secondary conditions
- Link to FAQ (Internet)
- License conditions

Selection and ordering data, documentation on paper

Documentation	Language	Article No.
Operating instructions DC Converter	German	6RX1800-0AD00
	English	6RX1800-0AD76
	French	6RX1800-0AD77
	Spanish	6RX1800-0AD78
	Italian	6RX1800-0AD72
	Russian	6RX1800-0AD56
	Chinese	6RX1800-0AD27
Operating instructions Control Module	German	6RX1800-0BD00
	English	6RX1800-0BD76
	French	6RX1800-0BD77
	Spanish	6RX1800-0BD78
	Italian	6RX1800-0BD72
	Russian	6RX1800-0BD56
	Chinese	6RX1800-0BD27
List Manual	German	6RX1800-0ED00
	English	6RX1800-0ED76
	French	6RX1800-0ED77
	Spanish	6RX1800-0ED78
	Italian	6RX1800-0ED72
	Russian	6RX1800-0ED56
	Chinese	6RX1800-0ED27
Function Manual SINAMICS Free Function Blocks	German	6RX1800-0FD00
	English	6RX1800-0FD76
Set of manuals DC Converter includes the Operating Instructions, List Manual and Function Manual Free Function Blocks ¹⁾	German	6RX1800-0GD00
	English	6RX1800-0GD76
	French	6RX1800-0GD77
	Spanish	6RX1800-0GD78
	Italian	6RX1800-0GD72
	Russian	6RX1800-0GD56
	Chinese	6RX1800-0GD27
Set of manuals Control Module includes the Operating Instructions, List Manual and Function Manual Free Function Blocks ¹⁾	German	6RX1800-0JD00
	English	6RX1800-0JD76
	French	6RX1800-0JD77
	Spanish	6RX1800-0JD78
	Italian	6RX1800-0JD72
	Russian	6RX1800-0JD56
	Chinese	6RX1800-0JD27

Selection and ordering data, documentation on DVD

Documentation	Article No.
All documentation in all languages on DVD	6RX1800-0AD64

¹⁾ Function Manual SINAMICS Free Function Blocks only in German and English.

SINAMICS DCM

Services and documentation

Notes

7

Appendix



8/2	Partners at Industry Automation and Drive Technologies
8/3	Online Services – Information and Ordering in the Internet and on DVD
8/3	Siemens Industry Automation and Drive Technologies in the WWW
8/3	Product Selection Using the Interactive Catalog CA 01 of Industry
8/3	Easy Shopping with the Industry Mall
8/4	Downloading Catalogs
8/4	Social Media
8/4	Mobile Media
8/5	Software Licenses
8/7	Subject index
8/9	Article number index
8/9	List of abbreviations
8/10	Conditions of sale and delivery

SINAMICS DCM

Appendix

Partners at Industry Automation and Drive Technologies



At Siemens Industry we are resolutely pursuing the same goal: long-term improvement of your competitive ability. We are committed to this goal. Thanks to our commitment, we continue to set new standards in automation and drive technology. In all industries – worldwide.

At your service locally, around the globe for consulting, sales, training, service, support, spare parts ... on the entire Industry Automation and Drive Technologies range.

Your personal contact can be found in our Contacts Database at: www.siemens.com/automation/partner

You start by selecting a

- Product group,
- Country,
- City,
- Service.



Siemens Industry Automation and Drive Technologies in the WWW



A detailed knowledge of the range of products and services available is essential when planning and configuring automation systems. It goes without saying that this information must always be fully up-to-date.

Siemens Industry Automation and Drive Technologies has therefore built up a comprehensive range of information in the World Wide Web, which offers quick and easy access to all data required.

Under the address

www.siemens.com/industry

you will find everything you need to know about products, systems and services.

Product Selection Using the Interactive Catalog CA 01 of Industry



Detailed information together with convenient interactive functions:

The interactive catalog CA 01 covers more than 80 000 products and thus provides a full summary of the Siemens Industry Automation and Drive Technologies product base.

Here you will find everything that you need to solve tasks in the fields of automation, switchgear, installation and drives. All information is linked into a user interface which is easy to work with and intuitive.


After selecting the product of your choice you can order at the press of a button, by fax or by online link.

Information on the interactive catalog CA 01 can be found in the Internet under

www.siemens.com/automation/ca01

or on DVD.

Easy Shopping with the Industry Mall

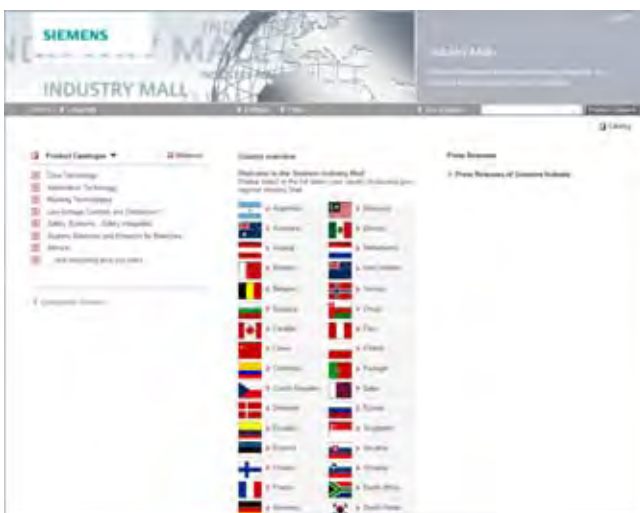

The Industry Mall is the electronic ordering platform of Siemens AG on the Internet. Here you have online access to a huge range of products presented in an informative and attractive way.

Data transfer via EDIFACT allows the whole procedure from selection through ordering to tracking and tracing of the order to be carried out. Availability checks, customer-specific discounts and preparation of quotes are also possible.

Numerous additional functions are available to support you.

For example, powerful search functions make it easy to select the required products. Configurators enable you to configure complex product and system components quickly and easily. CAx data types are also provided here.

Please visit the Industry Mall on the Internet under:

www.siemens.com/industrymall

Downloading Catalogs



In addition to numerous other useful documents, you can also find the catalogs listed on the back inside cover of this catalog in the Information and Download Center. Without having to register, you can download these catalogs in PDF format or increasingly as digital page-turning e-books.

The filter dialog box above the first catalog displayed makes it possible to carry out targeted searches. If you enter "MD 3" for example, you will find both the MD 30.1 and MD 31.1 catalogs. If you enter "ST 70" both the ST 70 catalog and the associated news or add-ons are displayed.

Visit us on the web at:

www.siemens.com/industry/infocenter

Social Media



Connect with Siemens through social media: visit our social networking sites for a wealth of useful information, demos on products and services, the opportunity to provide feedback, to exchange information and ideas with customers and other Siemens employees, and much, much more. Stay in the know and follow us on the ever-expanding global network of social media.

Connect with Siemens Industry at our central access point:

www.siemens.com/industry/socialmedia

Or via our product pages at:

www.siemens.com/automation

or

www.siemens.com/drives

To find out more about Siemens' current social media activities visit us at:

www.siemens.com/socialmedia

Mobile Media



Discover the world of Siemens.

We are also constantly expanding our offering of cross-platform apps for smartphones and tablets. You will find the current Siemens apps at the app store (iOS) or at Google Play (Android).

The Siemens app, for example, tells you all about the history, latest developments and future plans of the company – with informative pictures, fascinating reports and the most recent press releases.

Overview

Software types

Software requiring a license is categorized into types. The following software types have been defined:

- Engineering software
- Runtime software

Engineering software

This includes all software products for creating (engineering) user software, e.g. for configuring, programming, parameterizing, testing, commissioning or servicing.

Data generated with engineering software and executable programs can be duplicated for your own use or for use by third-parties free-of-charge.

Runtime software

This includes all software products required for plant/machine operation, e.g. operating system, basic system, system expansions, drivers, etc.

The duplication of the runtime software and executable programs created with the runtime software for your own use or for use by third-parties is subject to a charge.

You can find information about license fees according to use in the ordering data (e.g. in the catalog). Examples of categories of use include per CPU, per installation, per channel, per instance, per axis, per control loop, per variable, etc.

Information about extended rights of use for parameterization/configuration tools supplied as integral components of the scope of delivery can be found in the readme file supplied with the relevant product(s).

License types

Siemens Industry Automation & Drive Technologies offers various types of software license:

- Floating license
- Single license
- Rental license
- Rental floating license
- Trial license
- Demo license
- Demo floating license

Floating license

The software may be installed for internal use on any number of devices by the licensee. Only the concurrent user is licensed. The concurrent user is the person using the program. Use begins when the software is started. A license is required for each concurrent user.

Single license

Unlike the floating license, a single license permits only one installation of the software per license.

The type of use licensed is specified in the ordering data and in the Certificate of License (CoL). Types of use include for example per instance, per axis, per channel, etc.

One single license is required for each type of use defined.

Rental license

A rental license supports the "sporadic use" of engineering software. Once the license key has been installed, the software can be used for a specific period of time (the operating hours do not have to be consecutive).

One license is required for each installation of the software.

Rental floating license

The rental floating license corresponds to the rental license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

Trial license

A trial license supports "short-term use" of the software in a non-productive context, e.g. for testing and evaluation purposes. It can be transferred to another license.

Demo license

The demo license support the "sporadic use" of engineering software in a non-productive context, for example, use for testing and evaluation purposes. It can be transferred to another license. After the installation of the license key, the software can be operated for a specific period of time, whereby usage can be interrupted as often as required.

One license is required per installation of the software.

Demo floating license

The demo floating license corresponds to the demo license, except that a license is not required for each installation of the software. Rather, one license is required per object (for example, user or device).

Certificate of license (CoL)

The CoL is the licensee's proof that the use of the software has been licensed by Siemens. A CoL is required for every type of use and must be kept in a safe place.

Downgrading

The licensee is permitted to use the software or an earlier version/release of the software, provided that the licensee owns such a version/release and its use is technically feasible.

Delivery versions

Software is constantly being updated. The following delivery versions

- PowerPack
- Upgrade

can be used to access updates.

Existing bug fixes are supplied with the ServicePack version.

PowerPack

PowerPacks can be used to upgrade to more powerful software. The licensee receives a new license agreement and CoL (Certificate of License) with the PowerPack. This CoL, together with the CoL for the original product, proves that the new software is licensed.

A separate PowerPack must be purchased for each original license of the software to be replaced.

Upgrade

An upgrade permits the use of a new version of the software on the condition that a license for a previous version of the product is already held.

The licensee receives a new license agreement and CoL with the upgrade. This CoL, together with the CoL for the previous product, proves that the new version is licensed.

A separate upgrade must be purchased for each original license of the software to be upgraded.

Overview**ServicePack**

ServicePacks are used to debug existing products. ServicePacks may be duplicated for use as prescribed according to the number of existing original licenses.

License key

Siemens Industry Automation & Drive Technologies supplies software products with and without license keys.

The license key serves as an electronic license stamp and is also the "switch" for activating the software (floating license, rental license, etc.).

The complete installation of software products requiring license keys includes the program to be licensed (the software) and the license key (which represents the license).

Software Update Service (SUS)

As part of the SUS contract, all software updates for the respective product are made available to you free of charge for a period of one year from the invoice date. The contract will automatically be extended for one year if it is not canceled three months before it expires.

The possession of the current version of the respective software is a basic condition for entering into an SUS contract.

You can download explanations concerning license conditions from www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

Numerical

12-pulse operation.....	5/20
24 V DC electronics power supply	2/3

A

Accessories and supplementary components	4/1
Accessories, Control Module.....	3/55
Actual speed.....	3/4
Advanced CUD left.....	3/32; 3/35; 3/54
Advanced Operator Panel AOP30.....	3/47; 4/2
Arm fuses.....	4/15 ... 4/17
Article number index.....	8/9
Assignment of terminals and connectors	3/40
Auto-reversing module	3/5

B

Basic information about EMC	5/22
-----------------------------------	------

C

Cable, cable length, shield connection	5/21
Catalog CA 01	8/3
Characteristic values of the pulse tachometer evaluation electronics	5/21
Circuit breakers.....	4/22
Coated PCBs	2/4, 3/32; 3/36; 3/54
Communication between drive components	3/6
Communication Board	
• CBE20 left.....	3/32; 3/35; 3/54
• CBE20 right	3/32; 3/36; 3/54
Communications software	
• „PROFIBUS DP“	6/8
• „PROFINET IO“	6/8
• „USS protocol“	6/8
Commutating reactors	4/18
Conditions of sale and delivery	8/10
Contactors	4/22
Control Module	3/54
Control terminal block.....	3/51
Coolant temperature	3/8
Current controller.....	3/5
Current derating.....	3/8
Current limiting.....	3/5

D

DC Converter and Control Module	3/1
• Documentation	3/9
• General information	3/2
DC Converter.....	3/10
• Assignment of terminals and connectors.....	3/40
• Ordering examples.....	3/34
DC fuse.....	3/30 ... 3/31; 4/16 ... 4/17
Documentation.....	3/9; 7/11
Drive Control Chart (DCC).....	2/3, 3/47; 6/6
Drive ES engineering software	6/7
Drive ES	6/7
Drive family SINAMICS	2/2
DRIVE-CLiQ cables	4/5; 4/7; 4/10
DRIVE-CLiQ	3/6
DT Configurator selection tool	6/3
DT Configurator	6/3
Duty cycles for	
• four-quadrant operation.....	5/18
• two-quadrant operation	5/17
Dynamic overload capability	5/2

E

EMF controller.....	3/6
Energy & Environmental Services	7/9
Engineering information	5/1
Engineering tools.....	6/2
Engineering	6/2
Expandable functionality using SINAMICS components	2/3
Export regulations	8/10
Extension of the liability for defects.....	3/32; 3/37; 3/54

F

Fans	3/32; 3/36
Field current controller.....	3/6
Field power section	3/32; 3/36; 3/54
Field power supply in line with requirements	2/2
Field Services.....	7/8
Free function blocks	2/3, 3/43
Function block library for SIMATIC PCS 7	6/8
Functions of the closed-loop control in the	
• armature circuit	3/4
• field circuit.....	3/6
Functions of the inputs and outputs	3/50
Fuses for the	
• armature circuit	4/14
• field circuit.....	4/14

G

Gating unit	3/5, 3/6
-------------------	----------

H

Harmonics	5/28
-----------------	------

I

Industry Mall	8/3
Industry Services.....	7/6
Information and Download Center	8/4
Information and Ordering in the Internet and on DVD	8/3
Input pulse levels	5/21
Installation altitude.....	3/8
Interface to the motor	3/52

L

Line filters for armature circuit	4/23
Line filters for auxiliary power supply	4/23
Line fuses	4/14
Line-side harmonics	5/28
List of abbreviations	8/9

M

Maximum frequency that can be evaluated	5/21
Members of the SINAMICS drive family	1/6
Memory card	3/32; 3/37; 3/54
Mobile Media	8/4
Modernization & Optimization Services	7/10
Mounting kit to upgrade to IP20	4/13

N

Nickel-plated copper busbars	2/4
Notes for EMC-compliant installation	5/22

Subject index

O	
OALINK.....	3/7
Online Services.....	8/3
Online Support.....	7/7
Option selection matrix.....	3/33
Options	
• Control Module.....	3/54
• DC Converter.....	3/32
• SICROWBAR DC.....	4/30
Overvoltage protection.....	4/24, 4/27
P	
Parallel connection of SINAMICS DC MASTER units.....	5/19
Parameterizing devices.....	3/47
Partners at Industry Automation and Drive Technologies.....	8/2
Phase fuses.....	3/30 ... 3/31; 4/15 ... 4/17
Plant Maintenance & Condition Monitoring.....	7/10
Power section isolated with respect to ground.....	2/3
Pre-control.....	3/5
PROFIBUS as standard.....	2/2
PROFINET optional.....	2/2
Protection against condensation.....	5/20
R	
Radio interference suppression filters from EPCOS.....	4/23
Radio interference suppression filters.....	4/23
Ramp-function generator.....	3/4
Range of training courses.....	7/4
Repair Services.....	7/8
S	
Safety shutdown (E-STOP).....	3/51
Selection and ordering data	
• Control Module.....	3/54
• DC Converter.....	3/30
• DC Converters for two-quadrant operation.....	3/30
• DC Converters for four-quadrant operation.....	3/31
Serial interfaces.....	3/51
Service Contracts.....	7/10
Services and documentation.....	7/2
SETUP program.....	6/8
SICROWBAR AC.....	4/24
SICROWBAR DC.....	4/27
Siemens DC motors.....	3/52
Siemens Industry Training.....	7/3
SIMOREG CCP.....	4/31
SINAMICS DC MASTER for 12-pulse operation.....	5/20
SINAMICS DCM demonstration case.....	7/2
SINAMICS DCM series of converters.....	1/12; 3/10
SINAMICS DCM, Highlights.....	2/2
SINAMICS drive family.....	1/2
SINAMICS Link.....	3/6
Single-phase connection is possible.....	2/3
SIZER WEB ENGINEERING.....	6/2
SMC30 Sensor Module Cabinet-Mounted.....	4/4
Social Media.....	8/4
Software Licenses.....	8/5
Spare Parts.....	7/8
Speed controller.....	3/5
Speed setpoint.....	3/4
Standard CUD.....	3/32; 3/35; 3/54
STARTER commissioning tool.....	6/4
STARTER.....	6/4
STEP 7 device object manager.....	6/8
STEP 7 slave object manager.....	6/8
Supply of high inductances.....	5/20
System components of a DC drive.....	1/13
T	
Technical Consulting & Engineering Support.....	7/9
Technical Support.....	7/7
Terminal Module Cabinet (TMC).....	3/32; 3/36; 3/54
Terminal Module	
• TM15.....	4/5
• TM150.....	4/11
• TM31.....	4/8
Tools and engineering.....	6/1
Tools.....	6/2
Torque limiting.....	3/5
Totally Integrated Automation.....	4
Training.....	7/9
V	
Variance of the Control Units.....	2/2
Voltage derating.....	3/8
W	
WWW.....	8/3

3...	
3NC3.....	4/15 ... 4/16
3NE.....	4/14 ... 4/17
5...	
5SD4.....	4/14
6AU1..	
6AU1810-1.....	6/6
6ES7...	
6ES7901-4BD00-0XA0.....	6/5
6GK1...	
6GK1571-1AA00.....	6/5
6RA...	
6RA70.....	4/34
6RA80.....	3/30, 3/31
6RA8000-0MV62-0AA0.....	3/54
6RX1...	
6RX1700-0DD74.....	4/34
6RX1800-0.....	4/34, 7/11
6RX1800-0MA.....	4/13
6RX1800-0S.....	7/2
6RX1800-4DE0.....	4/21
6RX1800-4DK.....	4/19
6RX1800-4FK.....	4/20
6RX1800-4GK.....	4/20
6RX1800-4KK.....	4/21
6RX1800-4LK.....	4/21
6RX1800-4MK00.....	4/21
6RY1...	
6RY1702-0BA0.....	4/15, 4/16
6RY1707-0AA08.....	4/34
6RY1707-0CM.....	3/55
6RY1803-0C.....	3/55, 3/34
6RY1807-0AP.....	4/3
6RY1807-0CM.....	3/55
6SL3...	
6SL3055-0AA00-.....	4/3, 4/4
6SL3055-0AA00-3.....	4/7, 4/10, 4/11
6SL3060-4A.....	4/5, 4/10, 4/11
6SL3066-4C.....	4/11
6SL3072-0AA00-0AG0.....	6/5
6SW1...	
6SW1700-.....	6/8, 6/9
7VV3...	
7VV3002-.....	4/26
7VV3003-.....	4/30
7VV3003-7FG00.....	4/30
E	
E86060-D4001-A510-D3-7600.....	6/3

Abbreviation	Meaning
A	
AC	Alternating Current
AOP30	Advanced Operator Panel
AWG	American Wire Gauge
B	
BICO	Binector/Connector Technology
BOD	Break-Over Diode
BOP20	Basic Operator Panel
C	
CBE	Communication Board
CDS	Command Data Set
CM	Control Module
CU	Control Unit
CUD	Control Unit DC
D	
DC	Direct Current
DCB	Drive Control Block
DCC	Drive Control Chart
DCM	DC MASTER
DDS	Drive Data Set
DIN	German Institute for Standardization (Deutsches Institut für Normung e. V.)
DRIVE-CLiQ	Drive Component Link with IQ
E	
EMC	Electromagnetic Compatibility
EMF	Electromotive Force
EN	European standard (Europäische Norm)
EPROM	Erasable Programmable Read-Only Memory
E-STOP	Emergency Stop
ES	Engineering System
H	
HTL	High-level Transistor Logic
I	
IEC	International Electrotechnical Commission
IP	International Protection
L	
LCD	Liquid Crystal Display
LED	Light Emitting Diode
M	
MTBF	Mean Time Between Failure
O	
OS	Harmonics, Operating System
P	
PC	Personal Computer
PCS	Process Control System
PDS	Power Drive System
PE	Protective Earth
PG	Programming device (Programmiergerät)
PKW	Parameter identifier value (Parameter Kennung Wert)
PTC	Positive Temperature Coefficient
PZD	Process data (Prozessdaten)

Abbreviation.....	Meaning
R	
RAM	Random Access Memory
S	
SMC30	Sensor Module
SSO	Single-Sign-On
T	
TIA	Totally Integrated Automation
TIP	Totally Integrated Power
TM15, TM31	Terminal Module
TTL	Transistor Transistor Logic
U	
UL	Underwriters Laboratories Inc.
UPS	Uninterruptible Power Supply
USS	Universal serial interface (Universelle Serielle Schnittstelle)
V	
VDE	Association of Electrical Engineering, Electronics and Information Technology (Germany) (Verband der Elektrotechnik Elektronik Informationstechnik e.V.)

Conditions of sale and delivery

1. General Provisions

By using this catalog you can acquire hardware and software products described therein from Siemens AG subject to the following Terms and Conditions of Sale and Delivery (hereinafter referred to as "T&C"). Please note that the scope, the quality and the conditions for supplies and services, including software products, by any Siemens entity having a registered office outside Germany, shall be subject exclusively to the General Terms and Conditions of the respective Siemens entity. The following T&C apply exclusively for orders placed with Siemens Aktiengesellschaft, Germany.

1.1 For customers with a seat or registered office in Germany

For customers with a seat or registered office in Germany, the following applies subordinate to the T&C:

- the "General Terms of Payment"¹⁾ and,
- for software products, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or Registered Office in Germany"¹⁾ and,
- for other supplies and services, the "General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry"¹⁾.

1.2 For customers with a seat or registered office outside Germany

For customers with a seat or registered office outside Germany, the following applies subordinate to the T&C:

- the "General Terms of Payment"¹⁾ and,
- for software products, the "General License Conditions for Software Products for Automation and Drives for Customers with a Seat or Registered Office outside of Germany"¹⁾ and
- for other supplies and/or services, the "General Conditions for Supplies of Siemens Industry for Customers with a Seat or Registered Office outside of Germany"¹⁾.

2. Prices

The prices are in € (Euro) ex point of delivery, exclusive of packaging.

The sales tax (value added tax) is not included in the prices. It shall be charged separately at the respective rate according to the applicable statutory legal regulations.

Prices are subject to change without prior notice. We will charge the prices valid at the time of delivery.

To compensate for variations in the price of raw materials (e.g. silver, copper, aluminum, lead, gold, dysprosium and neodym), surcharges are calculated on a daily basis using the so-called metal factor for products containing these raw materials. A surcharge for the respective raw material is calculated as a supplement to the price of a product if the basic official price of the raw material in question is exceeded.

The metal factor of a product indicates the basic official price (for those raw materials concerned) as of which the surcharges on the price of the product are applied, and with what method of calculation.

An exact explanation of the metal factor can be downloaded at:

www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

To calculate the surcharge (except in the cases of dysprosium and neodym), the official price from the day prior to that on which the order was received or the release order was effected is used.

To calculate the surcharge applicable to dysprosium and neodym ("rare earths"), the corresponding three-month basic average price in the quarter prior to that in which the order was received or the release order was effected is used with a one-month buffer (details on the calculation can be found in the explanation of the metal factor).

3. Additional Terms and Conditions

The dimensions are in mm. In Germany, according to the German law on units in measuring technology, data in inches apply only to devices for export.

Illustrations are not binding.

Insofar as there are no remarks on the individual pages of this catalog - especially with regard to data, dimensions and weights given - these are subject to change without prior notice.

4. Export regulations

We shall not be obligated to fulfill any agreement if such fulfillment is prevented by any impediments arising out of national or international foreign trade or customs requirements or any embargoes and/or other sanctions.

Export of goods listed in this catalog may be subject to licensing requirements. We will indicate in the delivery details whether licenses are required under German, European and US export lists. Goods labeled with "AL" not equal to "N" are subject to European or German export authorization when being exported out of the EU. Goods labeled with "ECCN" not equal to "N" are subject to US re-export authorization.

The export indications can be viewed in advance in the description of the respective goods on the Industry Mall, our online catalog system. Only the export labels "AL" and "ECCN" indicated on order confirmations, delivery notes and invoices are authoritative.

Even without a label, or with label "AL:N" or "ECCN:N", authorization may be required i .a. due to the final disposition and intended use of goods.

If you transfer goods (hardware and/or software and/or technology as well as corresponding documentation, regardless of the mode of provision) delivered by us or works and services (including all kinds of technical support) performed by us to a third party worldwide, you must comply with all applicable national and international (re-)export control regulations.

If required for the purpose of conducting export control checks, you (upon request by us) shall promptly provide us with all information pertaining to the particular end customer, final disposition and intended use of goods delivered by us respectively works and services provided by us, as well as to any export control restrictions existing in this relation.

The products listed in this catalog may be subject to European/German and/or US export regulations. Any export requiring approval is therefore subject to authorization by the relevant authorities.

Errors excepted and subject to change without prior notice.

1) The text of the Terms and Conditions of Siemens AG can be downloaded at www.siemens.com/automation/salesmaterial-as/catalog/en/terms_of_trade_en.pdf

Industry Automation, Drive Technologies and Low-Voltage Power Distribution

Further information can be obtained from our branch offices listed at www.siemens.com/automation/partner

System Solutions for Industry Interactive Catalog on DVD	<i>Catalog</i>		
Products for Automation and Drives, Low-Voltage Power Distribution and Electrical Installation Technology	CA 01		
Building Control			
GAMMA Building Control	ET G1		
Drive Systems			
SINAMICS G130 Drive Converter Chassis Units	D 11		
SINAMICS G150 Drive Converter Cabinet Units			
SINAMICS GM150, SINAMICS SM150 Medium-Voltage Converters	D 12		
SINAMICS PERFECT HARMONY GH180 Medium-Voltage Air-Cooled Drives Germany Edition	D 15.1		
SINAMICS G180 Converters – Compact Units, Cabinet Systems, Cabinet Units Air-Cooled and Liquid-Cooled	D 18.1		
SINAMICS S120 Chassis Format Units and Cabinet Modules	D 21.3		
SINAMICS S150 Converter Cabinet Units			
SINAMICS DCM Converter Units	D 23.1		
SINAMICS DCM Cabinet	D 23.2		
SINAMICS and Motors for Single-Axis Drives	D 31		
Three-Phase Induction Motors SIMOTICS HV, SIMOTICS TN	D 84.1		
• Series H-compact			
• Series H-compact PLUS			
Asynchronous Motors Standardline	D 86.1		
Synchronous Motors with Permanent-Magnet Technology, HT-direct	D 86.2		
DC Motors	DA 12		
SIMOREG DC MASTER 6RA70 Digital Chassis Converters	DA 21.1		
SIMOREG K 6RA22 Analog Chassis Converters	DA 21.2		
<i>Digital: SIMOREG DC MASTER 6RM70 Digital Converter Cabinet Units</i>	DA 22		
SIMOVERT PM Modular Converter Systems	DA 45		
SIEMOSYN Motors	DA 48		
MICROMASTER 420/430/440 Inverters	DA 51.2		
MICROMASTER 411/COMBIMASTER 411	DA 51.3		
SIMOVERT MASTERDRIVES Vector Control	DA 65.10		
SIMOVERT MASTERDRIVES Motion Control	DA 65.11		
Synchronous and asynchronous servomotors for SIMOVERT MASTERDRIVES	DA 65.3		
SIMODRIVE 611 universal and POSMO	DA 65.4		
<i>Note: Additional catalogs on SIMODRIVE or SINAMICS drive systems and SIMOTICS motors with SINUMERIK and SIMOTION can be found under Motion Control</i>			
<u>Low-Voltage Three-Phase-Motors</u>			
SIMOTICS Low-Voltage Motors	D 81.1		
MOTOX Geared Motors	D 87.1		
SIMOGEAR Geared Motors	MD 50.1		
SIMOGEAR Gearboxes with adapter	MD 50.11		
<u>Mechanical Driving Machines</u>			
FLENDER Standard Couplings	MD 10.1		
FLENDER High Performance Couplings	MD 10.2		
FLENDER SIG Standard industrial gear unit	MD 30.1		
FLENDER SIP Standard industrial planetary gear units	MD 31.1		
Process Instrumentation and Analytics			
Field Instruments for Process Automation	FI 01		
<i>Digital: SIPART Controllers and Software</i>	MP 31		
Products for Weighing Technology	WT 10		
<i>Digital: Process Analytical Instruments</i>	PA 01		
<i>Digital: Process Analytics, Components for the System Integration</i>	PA 11		
<i>Digital: These catalogs are only available as a PDF and/or as an e-book.</i>			
Low-Voltage Power Distribution and Electrical Installation Technology	<i>Catalog</i>		
SENTRON · SIVACON · ALPHA Protection, Switching, Measuring and Monitoring Devices, Switchboards and Distribution Systems	LV 10		
Standards-Compliant Components for Photovoltaic Plants	LV 11		
3WT Air Circuit Breakers up to 4000 A	LV 35		
3VT Molded Case Circuit Breakers up to 1600 A	LV 36		
<i>Digital: SIVACON System Cubicles, System Lighting and System Air-Conditioning</i>	LV 50		
<i>Digital: ALPHA Distribution Systems</i>	LV 51		
ALPHA FIX Terminal Blocks	LV 52		
SIVACON S4 Power Distribution Boards	LV 56		
<i>Digital: SIVACON 8PS Busbar Trunking Systems</i>	LV 70		
<i>Digital: DELTA Switches and Socket Outlets</i>	ET D1		
Motion Control			
SINUMERIK & SIMODRIVE Automation Systems for Machine Tools	NC 60		
SINUMERIK & SINAMICS Equipment for Machine Tools	NC 61		
SINUMERIK 840D sl Type 1B Equipment for Machine Tools	NC 62		
SINUMERIK 808 Equipment for Machine Tools	NC 81.1		
SINUMERIK 828 Equipment for Machine Tools	NC 82		
SIMOTION, SINAMICS S120 & SIMOTICS Equipment for Production Machines	PM 21		
Drive and Control Components for Cranes	CR 1		
Power Supply			
Power supply SITOP	KT 10.1		
Safety Integrated			
Safety Technology for Factory Automation	SI 10		
SIMATIC HMI/PC-based Automation			
Human Machine Interface Systems/PC-based Automation	ST 80/ ST PC		
SIMATIC Ident			
Industrial Identification Systems	ID 10		
SIMATIC Industrial Automation Systems			
Products for Totally Integrated Automation	ST 70		
SIMATIC PCS 7 Process Control System System components	ST PCS 7		
SIMATIC PCS 7 Process Control System Technology components	ST PCS 7 T		
Add-ons for the SIMATIC PCS 7 Process Control System	ST PCS 7 AO		
SIMATIC NET			
Industrial Communication	IK PI		
SIRIUS Industrial Controls			
SIRIUS Industrial Controls	IC 10		
Information and Download Center			
Digital versions of the catalogs are available on the Internet at: www.siemens.com/industry/infocenter			
There you'll find additional catalogs in other languages.			
Please note the section "Downloading catalogs" on page "Online services" in the appendix of this catalog.			

Industrial Security

Siemens provides products and solutions with industrial security functions that support the secure operation of plants, solutions, machines, equipment and/or networks. They are important components in a holistic industrial security concept. With this in mind, Siemens' products and solutions undergo continuous development. Siemens recommends strongly that you regularly check for product updates.

For the secure operation of Siemens products and solutions, it is necessary to take suitable preventive action (e.g. cell protection concept) and integrate each component into a holistic, state-of-the-art industrial security concept. Third-party products that may be in use should also be considered. For more information about industrial security, visit

<http://www.siemens.com/industrialsecurity>.

To stay informed about product updates as they occur, sign up for a product-specific newsletter.

For more information, visit

<http://support.automation.siemens.com>.

Please scan the
QR code for more
information on
SINAMICS DCM.



Siemens AG
Industry Sector
Drive Technologies Division
Large Drives
Postfach 47 43
90025 NÜRNBERG
GERMANY

Subject to change without prior notice
Article No. E86060-K5523-A111-A2-7600
E.9115.41.LDT / Dispo 18402
KG 0614 7.0 AUM 180 En
Printed in Germany
© Siemens AG 2014

The information provided in this catalog contains merely general descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

SIEMENS



SINAMICS DCM DC Converter, Control Module

Catalog Add-On D 23.1 AO • 2016

SINAMICS Drives

D 23.1 AO

October
2016

SIEMENS

SINAMICS DCM

DC Converter, Control Module

Catalog Add-On D 23.1 AO

10-21-2016

Radio interference suppression filters	1
SINAMICS DCM DC Packages	2
Fuses	3
SMC10 Sensor Module Cabinet-Mounted	4

The information provided in this catalog add-on contains descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

Table of contents

1	Radio interference suppression filters	5
2	SINAMICS DCM DC Packages	7
3	Fuses	10
3.1	Fuses for the field circuit.....	10
3.2	Fuses for the armature circuit.....	10
4	SMC10 Sensor Module Cabinet-Mounted.....	15

1 Radio interference suppression filters

Please note the following corrections for the Catalog D 23.1 • 2014.

Content of D 23.1 • 2014 Catalog edition

The following table shows an excerpt from Catalog page 4/23.
Data to be corrected are highlighted in red.

List of the recommended radio interference suppression filters from EPCOS

Radio interference suppression filter	TN/TT system	IT system	Article No. EPCOS
Rated current	V	V	
A			
Line filters for armature circuit			
25	760/440	580/335	B84143A0025R021
50	760/441	580/335	B84143A0050R021
80	760/442	630/365	B84143A0080R021
120	760/443	630/365	B84143A0120R021
180	-	690/400	B84143B0180S024
180	520/300	360/208	B84143B0180S080
180	760/440	560/320	B84143B0180S081
250	520/300	360/208	B84143B0250S080
250	760/440	560/320	B84143B0250S081
400	-	690/400	B84143B0400S024
400	520/300	360/208	B84143B0400S080
400	760/440	560/320	B84143B0400S081
600	-	690/400	B84143B0600S024
600	520/300	360/208	B84143B0600S080
600	760/440	560/320	B84143B0600S081
1000	-	690/400	B84143B1000S024
1000	520/300	360/208	B84143B1000S080
1000	760/440	560/320	B84143B1000S081
1600	-	690/400	B84143B1600S024
1600	520/300	360/208	B84143B1600S080
1600	760/440	560/320	B84143B1600S081
2500	530/310	460/265	B84143B2500S020
2500	760/440	560/320	B84143B2500S021
2500	-	690/400	B84143B2500S024
Line filters for auxiliary power supply			
25	520/300	440/255	B84143A0025R105
50	520/301	440/256	B84143A0050R105
66	520/302	440/257	B84143A0066R105
90	520/303	440/258	B84143A0090R105
120	520/304	440/259	B84143A0120R105

Corrections and addition of the Siemens article numbers

The following table shows the corresponding excerpt from Catalog page 4/23 **with corrected and supplemented data** highlighted in green.

List of the recommended radio interference suppression filters

Rated current [A]	TN/TT system [V]	IT system [V]	Weight [kg]	Terminal cross-section / Hole for screw M..	Article No. EPCOS	Article No. Siemens
Line filters for armature circuit						
25	760/440	580/335	4.00	10 mm ²	B84143A0025R021	– ¹⁾
50	760/440	580/335	4.00	10 mm ²	B84143A0050R021	– ¹⁾
80	760/440	630/365	9.50	25 mm ²	B84143A0080R021	6RX1800-0LF03
120	760/440	630/365	10.0	50 mm ²	B84143A0120R021	6RX1800-0LF13
180	–	690/400	13.0	M10	B84143B0180S024	6RX1800-0KF00
180	520/300	360/208	5.00	M10	B84143B0180S080	6RX1800-0GF00
180	760/440	560/320	5.00	M10	B84143B0180S081	6RX1800-0LF04
250	520/300	360/208	5.00	M10	B84143B0250S080	6RX1800-0GF01
250	760/440	560/320	5.00	M10	B84143B0250S081	6RX1800-0LF14
400	–	690/400	21.0	M10	B84143B0400S024	6RX1800-0KF02
400	520/300	360/208	7.50	M10	B84143B0400S080	6RX1800-0GF03
400	760/440	560/320	7.50	M10	B84143B0400S081	6RX1800-0LF07
600	–	690/400	22.0	M10	B84143B0600S024	6RX1800-0KF03
600	520/300	360/208	7.80	M10	B84143B0600S080	6RX1800-0GF04
600	760/440	560/320	7.80	M10	B84143B0600S081	6RX1800-0LF08
1000	–	690/400	28.0	M12	B84143B1000S024	6RX1800-0KF04
1000	520/300	360/208	18.5	M12	B84143B1000S080	6RX1800-0GF05
1000	760/440	560/320	18.5	M12	B84143B1000S081	6RX1800-0LF10
1600	–	690/400	34.0	2 x M12	B84143B1600S024	6RX1800-0KF05
1600	520/300	360/208	24.5	2 x M12	B84143B1600S080	6RX1800-0GF06
1600	760/440	560/320	24.5	2 x M12	B84143B1600S081	6RX1800-0LF11
2500	530/310	460/265	105	4 x M12	B84143B2500S020	6RX1800-0GF07
2500	760/440	560/320	105	4 x M12	B84143B2500S021	6RX1800-0LF12
2500	–	690/400	105	4 x M12	B84143B2500S024	6RX1800-0KF06
Line filters for auxiliary power supply						
25	520/300	440/255	1.10	4 mm ²	B84143A0025R105	6RX1800-1GF00
50	520/300	440/255	1.75	10 mm ²	B84143A0050R105	– ¹⁾
66	520/300	440/255	2.70	16 mm ²	B84143A0066R105	6RX1800-1GF02
90	520/300	440/255	4.20	35 mm ²	B84143A0090R105	– ¹⁾
120	520/300	440/255	4.90	35 mm ²	B84143A0120R105	6RX1800-1GF04

1) These radio interference suppression filter types are not available with Siemens article number.
Please select the next type in size, if applicable.

Permissible operating data

Operating temperature: 0 to +40 °C

Rated frequency: 50/60 Hz ± 6 %

2 SINAMICS DCM DC Packages

Overview

SINAMICS DC MASTER DC Packages are available to provide support when engineering and when selecting accessory components. When customers design and build their own drive cabinets, it allows them to significantly reduce their costs.

SINAMICS DC MASTER DC Packages contain the following components:

- SINAMICS DC MASTER DC Converter
- Supply switch (including covers and operating mechanism)
- Main contactor (including varistor) or circuit breaker for higher power ratings
- Field contactor (including varistor)
- Commutation reactors (armature, field)
- Fuses (phase fuses for the armature and field circuit as well as DC fuses for 4Q, including holder)

The accessory components included in the DC Package were selected under the following criteria:

- Harmonized and coordinated with one another
- Dimensioned for the rated converter current
- Designed for 50 Hz operation
- Selection based on the parts lists of the SINAMICS DC MASTER Cabinet

The article number of the DC Packages only differs from that of the DC Converter in the third block:

DC Converter: 6RA80nn-naann-0AA0

DC Package: 6RA80nn-naann-0AP0

All options that can be selected when configuring the DC Converter are also available for DC Packages; with just a few exceptions, they only affect the DC Converters that are included. As a consequence, with options Q80 to Q85 the warranty period is extended only for the DC Converter.

The following options also affect the accessory components in the DC Package:

- Option L10 (without field power section):
When selecting option L10, accessory parts – field contactor (including varistor), commutation reactor for the field and fuses for the field (including holder) – are not included in the DC Package.
- Option L85 (85 A field power section):
When selecting option L85, the accessory components relevant for the field are dimensioned for 85 A.

Note:

The DC packages have not been conceived for use for parallel connections.

Benefits

- DC Packages facilitate simple ordering; all of the accessory components, which are harmonized and coordinated with one another, are supplied as package.
- The device options listed in Chapter 3 of Catalog D 23.1 are also available for DC Packages.
- The effects of certain device options (e.g. option L85) on accessory components are already taken into account in the factory.
- The components of DC Packages are optimally adapted to the SINAMICS DC MASTER DC Converter series.
- The various components (packages) have been taken from the range of accessories for SINAMICS DC MASTER Cabinet and are therefore tested and proven.
- All of the components have an IP00 degree of protection for installation in a control cabinet.

Applications

DC Packages extend the portfolio of the SINAMICS DC MASTER converter series, and can be used for all of the usually encountered applications.

It is guaranteed that the DC Packages can be reliably used due to the fact that the components are also used in the tested and well-proven SINAMICS DC MASTER Cabinet units.

Note:

The customer has the overall system responsibility when using DC Packages regarding the geometrical arrangement and cooling to be selected. Siemens does not accept any responsibility in this regard.

Design

Only Siemens components are used for the DC Packages. These are packed on pallets and delivered in one shipment.

Hinweis zu Sicherungen:

For technical reasons, fuses that have a different size than those specified in chapter 4 in the catalog are used for SINAMICS DCM DC Packages. However, they have equivalent characteristics (see chapter 3 in this document).

Mixed operation of different fuse types is not permissible.

Details on the precise content of DC Packages are included in the DT Configurator and in a product information in the Siemens "Industry Online Support":

- **DT Configurator:**
www.siemens.com/dt-configurator
- **Product information in the Industry Online Support:**
<http://support.automation.siemens.com/WW/view/en/101494323>

The following table shows an overview of the DC Packages content.

SINAMICS DCM DC Package	Rating DC Converter			Components for armature circuit						Components for field circuit ¹⁾		
	Two-/four-quadrant operation	Rated armature supply voltage [V]	Rated DC current [A]	Switch disconnecter fuse	Circuit breaker	Contact with snubber for coil	Commutating reactor	AC fuses	DC fuses	Contact with snubber for coil	Fuses with fuse holders	Commutating reactor
6RA8013-6DV62-0AP0	4Q	3AC 400	15	3KL50		3RT20	6RX1800-4DK00	3NE1814-0	3NE1814-0	3RT20	3NC1410	6RX1800-4DE00
6RA8018-6DV62-0AP0	4Q	3AC 400	30	3KL50		3RT20	6RX1800-4DK01	3NE8003-1	3NE4102	3RT20	3NC1410	6RX1800-4DE01
6RA8025-6DS22-0AP0	2Q	3AC 400	60	3KL50		3RT10	6RX1800-4DK02	3NE1817-0		3RT20	3NC1415	6RX1800-4DE02
6RA8025-6DV62-0AP0	4Q	3AC 400	60	3KL50		3RT10	6RX1800-4DK02	3NE1817-0	3NE4120	3RT20	3NC1415	6RX1800-4DE02
6RA8025-6GS22-0AP0	2Q	3AC 575	60	3KL50		3RT10	6RX1800-4GK00	3NE1817-0		3RT20	3NC1415	6RX1800-4DE02
6RA8025-6GV62-0AP0	4Q	3AC 575	60	3KL50		3RT10	6RX1800-4GK00	3NE1817-0	3NE4120	3RT20	3NC1415	6RX1800-4DE02
6RA8028-6DS22-0AP0	2Q	3AC 400	90	3KL52		3RT10	6RX1800-4DK03	3NE1820-0		3RT20	3NC1415	6RX1800-4DE02
6RA8028-6DV62-0AP0	4Q	3AC 400	90	3KL52		3RT10	6RX1800-4DK03	3NE1820-0	3NE4122	3RT20	3NC1415	6RX1800-4DE02
6RA8031-6DS22-0AP0	2Q	3AC 400	125	3KL52		3RT14	6RX1800-4DK04	3NE1021-0		3RT20	3NC1415	6RX1800-4DE02
6RA8031-6DV62-0AP0	4Q	3AC 400	125	3KL52		3RT14	6RX1800-4DK04	3NE1021-0	3NE4124	3RT20	3NC1415	6RX1800-4DE02
6RA8031-6GS22-0AP0	2Q	3AC 575	125	3KL52		3RT14	6RX1800-4GK01	3NE1021-0		3RT20	3NC1415	6RX1800-4DE02
6RA8031-6GV62-0AP0	4Q	3AC 575	125	3KL52		3RT14	6RX1800-4GK01	3NE1021-0	3NE4124	3RT20	3NC1415	6RX1800-4DE02
6RA8075-6DS22-0AP0	2Q	3AC 400	210	3KL55		3RT14	6RX1800-4DK05	3NE3227		3RT20	3NC1420	6RX1800-4DE03
6RA8075-6DV62-0AP0	4Q	3AC 400	210	3KL55		3RT14	6RX1800-4DK05	3NE3227	3NE3227	3RT20	3NC1420	6RX1800-4DE03
6RA8075-6GS22-0AP0	2Q	3AC 575	210	3KL55		3RT14	6RX1800-4GK02	3NE3227		3RT20	3NC1420	6RX1800-4DE03
6RA8075-6GV62-0AP0	4Q	3AC 575	210	3KL55		3RT14	6RX1800-4GK02	3NE3227	3NE3227	3RT20	3NC1420	6RX1800-4DE03
6RA8078-6DS22-0AP0	2Q	3AC 400	280	3KL57		3RT14	6RX1800-4DK06	3NE3231		3RT20	3NC1420	6RX1800-4DE03
6RA8078-6DV62-0AP0	4Q	3AC 400	280	3KL57		3RT14	6RX1800-4DK06	3NE3231	3NE3231	3RT20	3NC1420	6RX1800-4DE03
6RA8081-6DS22-0AP0	2Q	3AC 400	400	3KL61		3RT14	6RX1800-4DK07	3NE3333		3RT20	3NC1430	6RX1800-4DE04
6RA8081-6DV62-0AP0	4Q	3AC 400	400	3KL61		3RT14	6RX1800-4DK07	3NE3333	3NE3233	3RT20	3NC1430	6RX1800-4DE04
6RA8081-6GS22-0AP0	2Q	3AC 575	400	3KL61		3RT14	6RX1800-4GK03	3NE3333		3RT20	3NC1430	6RX1800-4DE04
6RA8081-6GV62-0AP0	4Q	3AC 575	400	3KL61		3RT14	6RX1800-4GK03	3NE3333	3NE3233	3RT20	3NC1430	6RX1800-4DE04
6RA8085-6DS22-0AP0	2Q	3AC 400	600	3KL62		3RT14	6RX1800-4DK10	3NE3336		3RT20	3NC1430	6RX1800-4DE04
6RA8085-6DV62-0AP0	4Q	3AC 400	600	3KL62		3RT14	6RX1800-4DK10	3NE3336	3NE3336	3RT20	3NC1430	6RX1800-4DE04
6RA8085-6GS22-0AP0	2Q	3AC 575	600	3KL62		3RT14	6RX1800-4GK04	3NE3336		3RT20	3NC1430	6RX1800-4DE04
6RA8085-6GV62-0AP0	4Q	3AC 575	600	3KL62		3RT14	6RX1800-4GK04	3NE3336	3NE3336	3RT20	3NC1430	6RX1800-4DE04
6RA8086-6KS22-0AP0	2Q	3AC 690	720	3KL62		3RT15	6RX1800-4KK00	3NE3337-8		3RT20	3NC1432	6RX1800-4DE05
6RA8086-6KV62-0AP0	4Q	3AC 690	760	3KL62		3RT15	6RX1800-4KK01	3NE3337-8	2x 3NE3334-0B	3RT20	3NC1432	6RX1800-4DE05
6RA8087-6DS22-0AP0	2Q	3AC 400	850	3KL62		3RT15	6RX1800-4DK11	3NE3338-8		3RT20	3NC1432	6RX1800-4DE05
6RA8087-6DV62-0AP0	4Q	3AC 400	850	3KL62		3RT15	6RX1800-4DK11	3NE3338-8	2x 3NE3334-0B	3RT20	3NC1432	6RX1800-4DE05
6RA8087-6GS22-0AP0	2Q	3AC 575	850	3KL62		3RT15	6RX1800-4GK07	3NE3338-8		3RT20	3NC1432	6RX1800-4DE05
6RA8087-6GV62-0AP0	4Q	3AC 575	850	3KL62		3RT15	6RX1800-4GK07	3NE3338-8	2x 3NE3334-0B	3RT20	3NC1432	6RX1800-4DE05
6RA8088-6LS22-0AP0	2Q	3AC 830	950		3WL12		6RX1800-4LK00			3RT20	3NE1802-0	6RX1800-4DE06
6RA8088-6LV62-0AP0	4Q	3AC 830	950		3WL12		6RX1800-4LK00			3RT20	3NE1802-0	6RX1800-4DE06
6RA8090-6GS22-0AP0	2Q	3AC 575	1100		3WL12		6RX1800-4GK11			3RT20	3NE1802-0	6RX1800-4DE06
6RA8090-6GV62-0AP0	4Q	3AC 575	1100		3WL12		6RX1800-4GK11			3RT20	3NE1802-0	6RX1800-4DE06
6RA8090-6KS22-0AP0	2Q	3AC 690	1000		3WL12		6RX1800-4KK03			3RT20	3NE1802-0	6RX1800-4DE06
6RA8090-6KV62-0AP0	4Q	3AC 690	1000		3WL12		6RX1800-4KK03			3RT20	3NE1802-0	6RX1800-4DE06
6RA8091-6DS22-0AP0	2Q	3AC 400	1200		3WL12		6RX1800-4DK12			3RT20	3NE1802-0	6RX1800-4DE06
6RA8091-6DV62-0AP0	4Q	3AC 400	1200		3WL12		6RX1800-4DK12			3RT20	3NE1802-0	6RX1800-4DE06
6RA8093-4DS22-0AP0	2Q	3AC 400	1600		3WL12		6RX1800-4DK13			3RT10	3NE1802-0	6RX1800-4DE06
6RA8093-4DV62-0AP0	4Q	3AC 400	1600		3WL12		6RX1800-4DK13			3RT10	3NE1802-0	6RX1800-4DE06
6RA8093-4GS22-0AP0	2Q	3AC 575	1600		3WL12		6RX1800-4GK13			3RT10	3NE1802-0	6RX1800-4DE06
6RA8093-4GV62-0AP0	4Q	3AC 575	1600		3WL12		6RX1800-4GK13			3RT10	3NE1802-0	6RX1800-4DE06
6RA8093-4KS22-0AP0	2Q	3AC 690	1500		3WL12		6RX1800-4KK04			3RT10	3NE1802-0	6RX1800-4DE06
6RA8093-4KV62-0AP0	4Q	3AC 690	1500		3WL12		6RX1800-4KK04			3RT10	3NE1802-0	6RX1800-4DE06
6RA8093-4LS22-0AP0	2Q	3AC 830	1500		3WL12		6RX1800-4LK01			3RT10	3NE1802-0	6RX1800-4DE06
6RA8093-4LV62-0AP0	4Q	3AC 830	1500		3WL12		6RX1800-4LK01			3RT10	3NE1802-0	6RX1800-4DE06
6RA8095-4DS22-0AP0	2Q	3AC 400	2000		3WL12		6RX1800-4DK14			3RT10	3NE1802-0	6RX1800-4DE06
6RA8095-4DV62-0AP0	4Q	3AC 400	2000		3WL12		6RX1800-4DK14			3RT10	3NE1802-0	6RX1800-4DE06
6RA8095-4GS22-0AP0	2Q	3AC 575	2000		3WL12		6RX1800-4GK14			3RT10	3NE1802-0	6RX1800-4DE06
6RA8095-4GV62-0AP0	4Q	3AC 575	2000		3WL12		6RX1800-4GK14			3RT10	3NE1802-0	6RX1800-4DE06
6RA8095-4KS22-0AP0	2Q	3AC 690	2000		3WL12		6RX1800-4KK06			3RT10	3NE1802-0	6RX1800-4DE06
6RA8095-4KV62-0AP0	4Q	3AC 690	2000		3WL12		6RX1800-4KK06			3RT10	3NE1802-0	6RX1800-4DE06
6RA8095-4LS22-0AP0	2Q	3AC 830	1900		3WL12		6RX1800-4LK02			3RT10	3NE1802-0	6RX1800-4DE06
6RA8095-4LV62-0AP0	4Q	3AC 830	1900		3WL12		6RX1800-4LK02			3RT10	3NE1802-0	6RX1800-4DE06
6RA8096-4GS22-0AP0	2Q	3AC 575	2200		3WL12		6RX1800-4GK15			3RT10	3NE1802-0	6RX1800-4DE06
6RA8096-4GV62-0AP0	4Q	3AC 575	2200		3WL12		6RX1800-4GK15			3RT10	3NE1802-0	6RX1800-4DE06
6RA8096-4MS22-0AP0	2Q	3AC 950	2200		3WL12		6RX1800-4MK00			3RT10	3NE1802-0	6RX1800-4DE06
6RA8096-4MV62-0AP0	4Q	3AC 950	2200		3WL12		6RX1800-4MK00			3RT10	3NE1802-0	6RX1800-4DE06
6RA8097-4GS22-0AP0	2Q	3AC 575	2800		3WL12		6RX1800-4GK17			3RT10	3NE1802-0	6RX1800-4DE06
6RA8097-4GV62-0AP0	4Q	3AC 575	2800		3WL12		6RX1800-4GK17			3RT10	3NE1802-0	6RX1800-4DE06
6RA8097-4KS22-0AP0	2Q	3AC 690	2600		3WL12		6RX1800-4KK07			3RT10	3NE1802-0	6RX1800-4DE06
6RA8097-4KV62-0AP0	4Q	3AC 690	2600		3WL12		6RX1800-4KK07			3RT10	3NE1802-0	6RX1800-4DE06
6RA8098-4DS22-0AP0	2Q	3AC 400	3000		3WL12		6RX1800-4DK15			3RT10	3NE1802-0	6RX1800-4DE06
6RA8098-4DV62-0AP0	4Q	3AC 400	3000		3WL12		6RX1800-4DK15			3RT10	3NE1802-0	6RX1800-4DE06

1) On Siemens AG 2016 selected for the DC Converter

3 Fuses

The following tables provide an overview of the range of fuses available for SINAMICS DC MASTER. The data of the fuses from the SINAMICS DCM DC Packages are marked with a green background in the table header and separated from the adjacent columns with a double line.

3.1 Fuses for the field circuit

Rated DC current for converter unit [A]	Max. field current [A]	Siemens fuse		Siemens fuse for SINAMICS DCM DC Packages		Bussmann RU fuse FWP 700V	
		Article No.	Curr. [A]	Article No.	Curr. [A]	Article No.	Curr. [A]
15	3	5SD420	16	3NC1410	10	FWP-5B	5
30	5	5SD420	16	3NC1410	10	FWP-5B	5
60 ... 125	10	5SD420	16	3NC1415	15	FWP-15B	15
210 ... 280	15	5SD440	25	3NC1420	20	FWP-20B	20
400 ... 600	25	5SD440	25	3NC1430	30	FWP-30B	30
710 ... 850	30	5SD480	30	3NC1432	32	FWP-35B	35
900 ... 3000	40	3NE1802-0 ¹⁾	40	–	–	FWP-50B	50
1500 ... 3000 (with option L85)	85	3NE1802-0 ¹⁾	100	–	–	FWP-100B	100

1) UL-recognized

Mixed operation of different fuse types is not permissible.

3.2 Fuses for the armature circuit

2Q units: 400 V, 575 V, 690 V, 830 V and 950 V

Phase fuses

Converter unit		3 x Siemens RU phase fuses		3 x Siemens RU phase fuses for SINAMICS DCM DC Packages	
Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]
6RA8025-6DS22-0AA0	60/400	3NE1817-0	50/690	3NE1817-0	50/690
6RA8025-6GS22-0AA0	60/575	3NE1817-0	50/690	3NE1817-0	50/690
6RA8028-6DS22-0AA0	90/400	3NE1820-0	80/690	3NE1820-0	80/690
6RA8031-6DS22-0AA0	125/400	3NE1021-0	100/690	3NE1021-0	100/690
6RA8031-6GS22-0AA0	125/575	3NE1021-0	100/690	3NE1021-0	100/690
6RA8075-6DS22-0AA0	210/400	3NE3227	250/1000	3NE3227	250/1000
6RA8075-6GS22-0AA0	210/575	3NE3227	250/1000	3NE3227	250/1000
6RA8078-6DS22-0AA0	280/400	3NE3231	350/1000	3NE3231	350/1000
6RA8081-6DS22-0AA0	400/400	3NE3233	450/1000	3NE3333	450/1000
6RA8081-6GS22-0AA0	400/575	3NE3233	450/1000	3NE3333	450/1000
6RA8085-6DS22-0AA0	600/400	3NE3336	630/1000	3NE3336	630/1000

Converter unit		3 x Siemens RÜ phase fuses		3 x Siemens RÜ phase fuses for SINAMICS DCM DC Packages	
Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]
6RA8085-6GS22-0AA0	600/575	3NE3336	630/1000	3NE3336	630/1000
6RA8087-6DS22-0AA0	850/400	3NE3338-8	800/800	3NE3338-8	800/800
6RA8087-6GS22-0AA0	800/575	3NE3338-8	800/800	3NE3338-8	800/800
6RA8086-6KS22-0AA0	720/690	3NE3337-8	710/900	3NE3337-8	710/900

Mixed operation of different fuse types is not permissible.

Arm fuses

Converter unit		Siemens RÜ arm fuses		
Article No.	I/U [A/V]	Quantity	Article No.	I/U [A/V]
6RA8091-6DS22-0AA0	1200/400	6	3NE3338-8	800/800
6RA8090-6GS22-0AA0	1100/575	6	3NE3338-8	800/800
6RA8090-6KS22-0AA0	1000/690	6	3NE3337-8	710/900
6RA8088-6LS22-0AA0	950/830	6	3NE3337-8	710/900
6RA8093-4DS22-0AA0	1600/400	6	6RY1702-0BA02	1000/660
6RA8093-4GS22-0AA0	1600/575	6	6RY1702-0BA02	1000/660
6RA8093-4KS22-0AA0	1500/690	6	6RY1702-0BA03	1000/1000
6RA8093-4LS22-0AA0	1500/830	6	6RY1702-0BA03	1000/1000
6RA8095-4DS22-0AA0	2000/400	6	6RY1702-0BA01	1250/660
6RA8095-4GS22-0AA0	2000/575	6	6RY1702-0BA01	1250/660
6RA8095-4KS22-0AA0	2000/690	12	6RY1702-0BA04	630/1000
6RA8095-4LS22-0AA0	1900/830	12	6RY1702-0BA04	630/1000
6RA8096-4GS22-0AA0	2200/575	6	6RY1702-0BA05	1500/660
6RA8096-4MS22-0AA0	2200/950	12	3NC3438-6	800/1100
6RA8097-4KS22-0AA0	2600/690	12	3NC3341-6	1000/1000
6RA8097-4GS22-0AA0	2800/575	12	3NC3341-6	1000/1000
6RA8098-4DS22-0AA0	3000/400	12	3NC3341-6	1000/1000

The arm fuses are included in the unit. No external semiconductor fuses are required. Mixed operation of different fuse types is not permissible.

2Q units: 480 V**Phase fuses**

Converter unit		3 x Siemens 3RU phase fuses		3 x Bussmann 3RU phase fuses		3 x Bussmann 3RU phase fuses	
Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]
6RA8025-6FS22-0AA0	60/480	3NE1817-0	50/690	170M1565	63/660	FWH-60B	60/500
6RA8028-6FS22-0AA0	90/480	3NE1820-0	80/690	170M1567	100/660	FWH-100B	100/500
6RA8031-6FS22-0AA0	125/480	3NE1021-0	100/690	170M1568	125/660	FWH-125B	125/500
6RA8075-6FS22-0AA0	210/480	3NE3227	250/1000	170M3166	250/660	FWH-225A	225/500
6RA8078-6FS22-0AA0	280/480	3NE3231	350/1000	170M3167	315/660	FWH-275A	275/500
6RA8082-6FS22-0AA0	450/480	3NE3233	450/1000	170M3170	450/660	FWH-450A	450/500
6RA8085-6FS22-0AA0	600/480	3NE3336	630/1000	170M4167	700/660	FWH-600A	600/500
6RA8087-6FS22-0AA0	850/480	3NE3338-8	800/800	170M5165	900/660	FWH-800A	800/500

FWH fuses are not mechanically compatible with 3NE or 170M fuses.
Mixed operation of different fuse types is not permissible.

Arm fuses

Converter unit		Siemens 3RU arm fuses		
Article No.	I/U [A/V]	Quantity	Article No.	I/U [A/V]
6RA8091-6FS22-0AA0	1200/480	6	3NE3338-8	800/800

The arm fuses are included in the unit. No external semiconductor fuses are required.
Mixed operation of different fuse types is not permissible.

4Q units: 400 V, 575 V, 690 V, 830 V and 950 V**Phase fuses, DC fuse**

Converter unit		3 x Siemens 3RU phase fuses		3 x Siemens 3RU phase fuses for SINAMICS DCM DC Packages		1 x Siemens 3RU DC fuse	
Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]
6RA8013-6DV62-0AA0	15/400	3NE1814-0	20/690	3NE1814-0	20/690	3NE1814-0	20/690
6RA8018-6DV62-0AA0	30/400	3NE8003-1	35/690	3NE8003-1	35/690	3NE4102	40/1000
6RA8025-6DV62-0AA0	60/400	3NE1817-0	50/690	3NE1817-0	50/690	3NE4120	80/1000
6RA8025-6GV62-0AA0	60/575	3NE1817-0	50/690	3NE1817-0	50/690	3NE4120	80/1000
6RA8028-6DV62-0AA0	90/400	3NE1820-0	80/690	3NE1820-0	80/690	3NE4122	125/1000
6RA8031-6DV62-0AA0	125/400	3NE1021-0	100/690	3NE1021-0	100/690	3NE4124	160/1000
6RA8031-6GV62-0AA0	125/575	3NE1021-0	100/690	3NE1021-0	100/690	3NE4124	160/1000
6RA8075-6DV62-0AA0	210/400	3NE3227	250/1000	3NE3227	250/1000	3NE3227	250/1000

Converter unit		3 x Siemens RÜ phase fuses		3 x Siemens RÜ phase fuses for SINAMICS DCM DC Packages		1 x Siemens RÜ DC fuse	
Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]
6RA8075-6GV62-0AA0	210/575	3NE3227	250/1000	3NE3227	250/1000	3NE3227	250/1000
6RA8078-6DV62-0AA0	280/400	3NE3231	350/1000	3NE3231	350/1000	3NE3231	350/1000
6RA8081-6DV62-0AA0	400/400	3NE3233	450/1000	3NE3333	450/1000	3NE3233	450/1000
6RA8081-6GV62-0AA0	400/575	3NE3233	450/1000	3NE3333	450/1000	3NE3233	450/1000
6RA8085-6DV62-0AA0	600/400	3NE3336	630/1000	3NE3336	630/1000	3NE3336	630/1000
6RA8085-6GV62-0AA0	600/575	3NE3336	630/1000	3NE3336	630/1000	3NE3336	630/1000
6RA8087-6DV62-0AA0	850/400	3NE3338-8	800/800	3NE3338-8	800/800	3NE3334-0B ¹⁾	500/1000
6RA8087-6GV62-0AA0	850/575	3NE3338-8	800/800	3NE3338-8	800/800	3NE3334-0B ¹⁾	500/1000
6RA8086-6KV62-0AA0	760/690	3NE3337-8	710/900	3NE3337-8	710/900	3NE3334-0B ¹⁾	500/1000

1) Two fuses connected in parallel.

Mixed operation of different fuse types is not permissible.

Arm fuses

Converter unit		Siemens RÜ arm fuses		
Article No.	I/U [A/V]	Quantity	Article No.	I/U [A/V]
6RA8091-6DV62-0AA0	1200/400	6	3NE3338-8	800/800
6RA8090-6GV62-0AA0	1100/575	6	3NE3338-8	800/800
6RA8090-6KV62-0AA0	1000/690	6	3NE3337-8	710/900
6RA8088-6LV62-0AA0	950/830	6	3NE3337-8	710/900
6RA8093-4DV62-0AA0	1600/400	6	6RY1702-0BA02	1000/660
6RA8093-4GV62-0AA0	1600/575	6	6RY1702-0BA02	1000/660
6RA8093-4KV62-0AA0	1500/690	6	6RY1702-0BA03	1000/1000
6RA8093-4LV62-0AA0	1500/830	6	6RY1702-0BA03	1000/1000
6RA8095-4DV62-0AA0	2000/400	6	6RY1702-0BA01	1250/660
6RA8095-4GV62-0AA0	2000/575	6	6RY1702-0BA01	1250/660
6RA8095-4KV62-0AA0	2000/690	12	6RY1702-0BA04	630/1000
6RA8095-4LV62-0AA0	1900/830	12	6RY1702-0BA04	630/1000
6RA8096-4GV62-0AA0	2200/575	6	6RY1702-0BA05	1500/660
6RA8096-4MV62-0AA0	2200/950	12	3NC3438-6	800/1100
6RA8097-4KV62-0AA0	2600/690	12	3NC3341-6	1000/1000
6RA8097-4GV62-0AA0	2800/575	12	3NC3341-6	1000/1000
6RA8098-4DV62-0AA0	3000/400	12	3NC3341-6	1000/1000

The arm fuses are included in the unit. No external semiconductor fuses are required.

Mixed operation of different fuse types is not permissible.

4Q units: 480 V**Phase fuses**

Converter unit		3 x Siemens RU phase fuses		3 x Bussmann RU phase fuses		3 x Bussmann RU phase fuses	
Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]
6RA8013-6FV62-0AA0	15/480	3NE1814-0	20/690	170M1562	32/660	FWH-35B	35/500
6RA8018-6FV62-0AA0	30/480	3NE1815-0	25/690	170M1562	32/660	FWH-35B	35/500
6RA8025-6FV62-0AA0	60/480	3NE1817-0	50/690	170M1565	63/660	FWH-60B	60/500
6RA8028-6FV62-0AA0	90/480	3NE1820-0	80/690	170M1567	100/660	FWH-100B	100/500
6RA8031-6FV62-0AA0	125/480	3NE1021-0	100/690	170M1568	125/660	FWH-125B	125/500
6RA8075-6FV62-0AA0	210/480	3NE3227	250/1000	170M3166	250/660	FWH-225A	225/500
6RA8078-6FV62-0AA0	280/480	3NE3231	350/1000	170M3167	315/660	FWH-275A	275/500
6RA8082-6FV62-0AA0	450/480	3NE3233	450/1000	170M3170	450/660	FWH-450A	450/500
6RA8085-6FV62-0AA0	600/480	3NE3336	630/1000	170M4167	700/660	FWH-600A	600/500
6RA8087-6FV62-0AA0	850/480	3NE3338-8	800/800	170M5165	900/660	FWH-800A	800/500

FWH fuses are not mechanically compatible with 3NE or 170M fuses.
Mixed operation of different fuse types is not permissible.

DC fuses

Converter unit		1 x Siemens RU DC fuse		1 x Bussmann RU DC fuse	
Article No.	I/U [A/V]	Article No.	I/U [A/V]	Article No.	I/U [A/V]
6RA8013-6FV62-0AA0	15/480	3NE1814-0	20/690	FWP-35B	35/660
6RA8018-6FV62-0AA0	30/480	3NE4102	40/1000	FWP-35B	35/660
6RA8025-6FV62-0AA0	60/480	3NE4120	80/1000	FWP-70B	70/660
6RA8028-6FV62-0AA0	90/480	3NE4122	125/1000	FWP-125A	125/660
6RA8031-6FV62-0AA0	125/480	3NE4124	160/1000	FWP-150A	150/660
6RA8075-6FV62-0AA0	210/480	3NE3227	250/1000	FWP-250A	250/660
6RA8078-6FV62-0AA0	280/480	3NE3231	350/1000	FWP-350A	350/660
6RA8082-6FV62-0AA0	450/480	3NE3334-0B	500/1000	FWP-500A	500/660
6RA8085-6FV62-0AA0	600/480	3NE3336	630/1000	FWP-700A	700/660
6RA8087-6FV62-0AA0	850/480	3NE3334-0B ¹⁾	500/1000	FWP-1000A	1000/660

1) Two fuses connected in parallel.

FWP fuses are not mechanically compatible with 3NE fuses.
Mixed operation of different fuse types is not permissible.

Arm fuses

Converter unit		Siemens RU arm fuses		
Article No.	I/U [A/V]	Quantity	Article No.	I/U [A/V]
6RA8091-6FV62-0AA0	1200/480	6	3NE3338-8	800/800

The arm fuses are included in the unit. No external semiconductor fuses are required.
Mixed operation of different fuse types is not permissible.

4 SMC10 Sensor Module Cabinet-Mounted

Note:

From firmware version 1.4.1.4, in conjunction with the SMC10 Sensor Module Cabinet-Mounted, also resolvers can be evaluated.

Overview

When resolvers are used to sense the position and determine the speed, the SMC10 Sensor Module Cabinet-Mounted is required to evaluate the signals.

The following encoder signals can be evaluated: ¹⁾

- 2-pole resolver
- Multi-pole resolver

The motor temperature input, available on the SMC10, is not evaluated for SINAMICS DC MASTER. A motor temperature sensor can be evaluated using the temperature measurement input provided on each CUD.

Design

The SMC10 Sensor Module Cabinet-Mounted features the following interfaces as standard:

- 1 DRIVE-CLiQ interface
- 1 encoder connection via Sub-D connector
- 1 connection for the electronics power supply via the 24 V DC power supply connector
- 1 PE (protective earth) connection

The status of the SMC10 Sensor Module Cabinet-Mounted is indicated via a multi-color LED.

The SMC10 Sensor Module Cabinet-Mounted can be snapped onto a TH 35 standard mounting rail in accordance with EN 60715 (IEC 60715).

The signal cable shield is connected via the encoder system connector and can also be connected to the SMC10 Sensor Module Cabinet-Mounted via a shield connection terminal, e.g. Phoenix Contact type SK8 or Weidmüller type KLBÜ CO 1. The shield connection terminal must not be used for strain relief.

¹⁾ Encoders, which have a DRIVE-CLiQ interface, cannot be evaluated at the SINAMICS DC MASTER or at the SMC10 respectively. These encoders are usually not used in DC drive technology.

Selection and ordering data

Description	Article No.
SMC10Sensor Module Cabinet-Mounted Without DRIVE-CLiQ cable	6SL3055-0AA00-5AA3

Integration

The SMC10 Sensor Module Cabinet-Mounted communicates with a Control Unit via DRIVE-CLiQ.

Technical specifications

SMC10Sensor Module Cabinet-Mounted 6SL3055-0AA00-5AA3	
Power requirement, max. At 24 V DC, not taking encoder into account	0.2 A
<ul style="list-style-type: none"> Conductor cross-section, max. Fuse protection, max. 	2.5 mm ² 20 A
Power loss, max.	10 W
Encoders which can be evaluated	<ul style="list-style-type: none"> 2-pole resolvers Multi-pole resolvers
<ul style="list-style-type: none"> Excitation voltage, rms Excitation frequency Transformation ratio Encoder frequency, max. 	4.1 V 5 ... 10 kHz; depending on the current controller clock cycle 0.5 2 kHz (120,000 rpm); depending on the number of resolver pole pairs and the current controller clock cycle
<ul style="list-style-type: none"> Signal subdivision (interpolation), max. Cable length to encoder, max. 	16,384 times (14 bits) 130 m
PE connection	M4 screw
Dimensions	
<ul style="list-style-type: none"> Width Height Depth 	30 mm 150 mm 111 mm
Weight, approx.	0.4 kg

Siemens AG
Process Industries and Drives
Large Drives
Postfach 48 48
90026 NÜRNBERG
DEUTSCHLAND

Subject to change without prior notice
© Siemens AG 2016

The information provided in this catalog add-on contains descriptions or characteristics of performance which in case of actual use do not always apply as described or which may change as a result of further development of the products. An obligation to provide the respective characteristics shall only exist if expressly agreed in the terms of contract. Availability and technical specifications are subject to change without notice.

All product designations may be trademarks or product names of Siemens AG or supplier companies whose use by third parties for their own purposes could violate the rights of the owners.

www.siemens.com/sinamics