




COMPACT BELT SANDER

*Quickly Finish
Difficult Shapes*

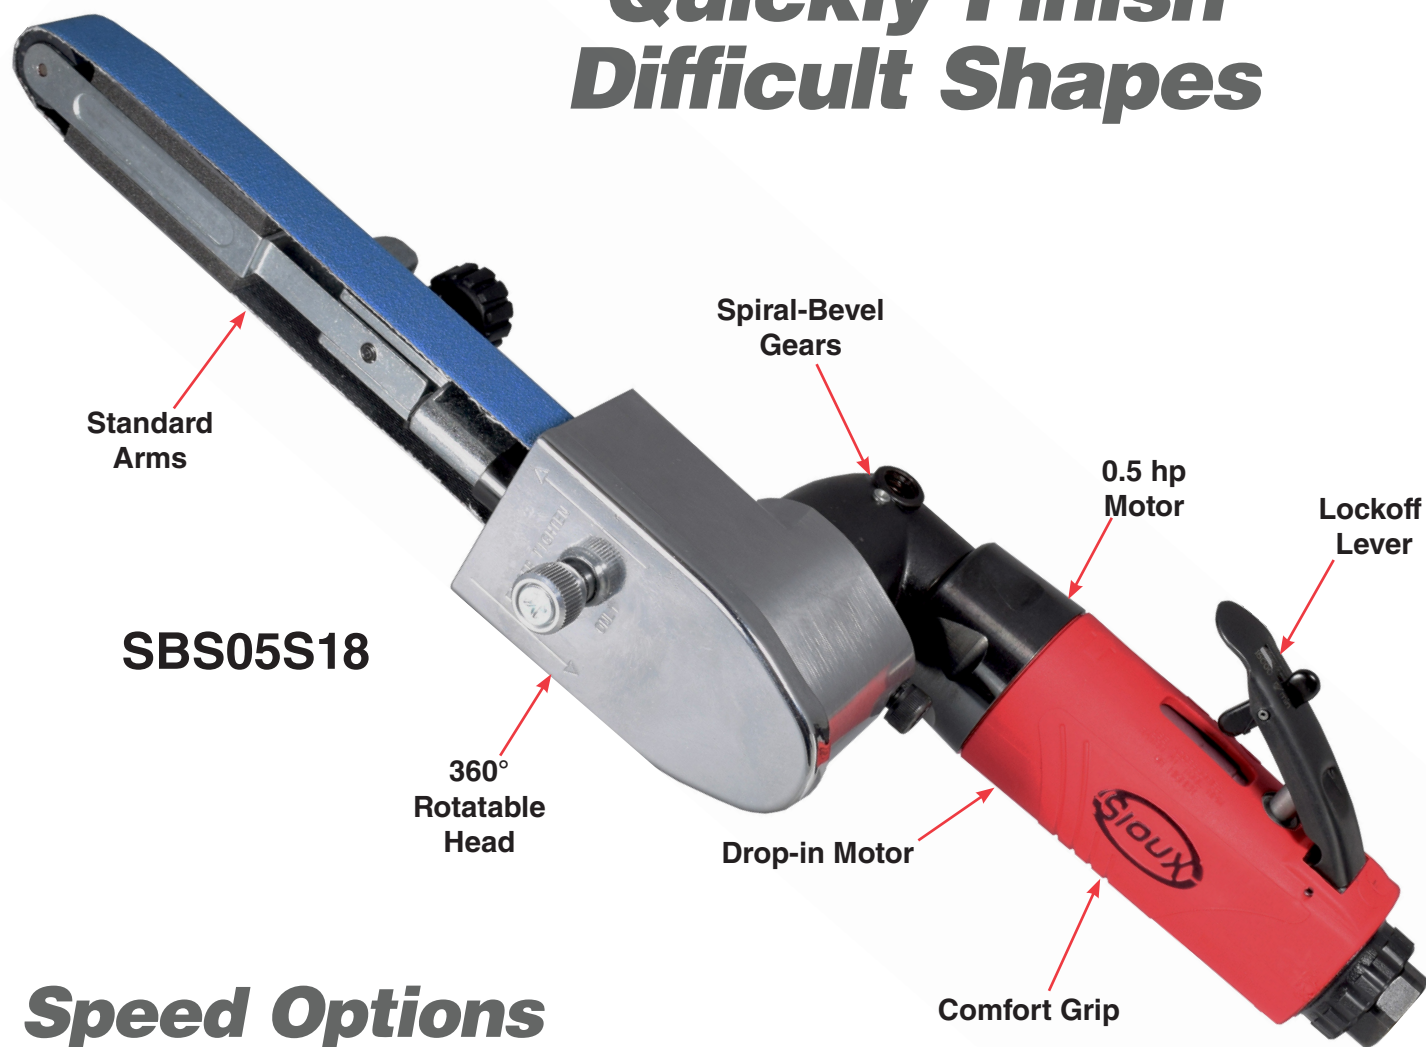

*Speed Options
Available*


Sand




Polish



Deburr

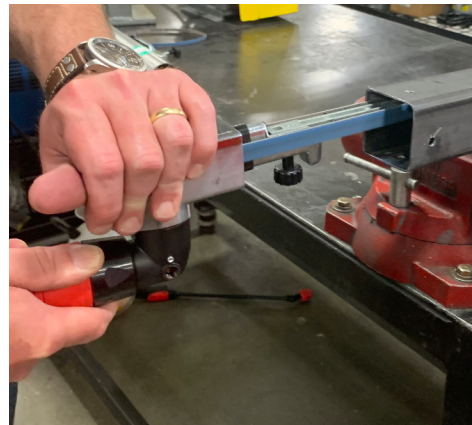

COMPACT BELT SANDER

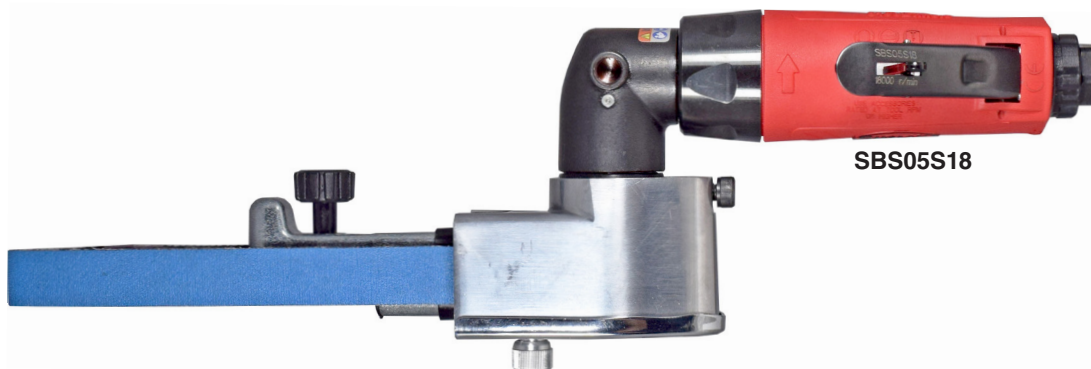

SBS05S18

Belt Sander



Model Number	Belt Speed	Spindle Speed	Arm Size	Weight		Length		Air Consumption		Exhaust
	sfpm	rpm		lb	kg	in	mm	cfm	l/s	
0.5 hp (0.37 kW)										
SBS05S12	2700	12000	3/4 x 18	2.8	1.3	14.2	360	23	11	Rear
SBS05S18	4100	18000	3/4 x 18	2.8	1.3	14.2	360	23	11	Rear
SBS05S12-4	2700	12000	1/2 x 18	2.8	1.3	14.2	360	23	11	Rear
SBS05S18-4	4100	18000	1/2 x 18	2.8	1.3	14.2	360	23	11	Rear

General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

Standard Equipment: Parts List • Safety & Instruction Manual • 571-618F contact arm • Hex key for head positioning



571-618F



571-418F



571-218C

Arms

Model Number	Arm Usage	Belt Size	Arm	Wheel		
				Shape	Width	Diameter
571-618F	Multi-Purpose	3/4 x 18	2 Platen Pads	Flat	0.57	0.71
571-418F	Multi-Purpose	1/2 x 18	2 Platen Pads	Flat	0.32	0.59
571-218C	Tubing, Curves and Fillets	1/4-1/2 x 18	Offset	Curved	0.32	0.97

siouxtools.com



250 Snap-on Drive
P.O. Box 1596
Murphy, North Carolina USA 28906
PH: 828.835.9765
FAX: 828.835.9685
TOLL FREE: 866.259.7291
TOLL FREE FAX: 800.722.7236

Belgium
Tel.: 32 (0)14 23 19 67
Fax: 32 (0)14 23 26 27
Email: Industrial.be@snapon.com

Netherlands
Tel.: 31 (0)88 0104000
Fax: 31 (0)88 0104010
Email: Industrial.nl@snapon.com

Latin America
Tel.: 786-254-7765
Fax: 786-534-9350
e-mail: latinamerica.caribbean@snapon.com

Germany
Tel.: 49 2104 9509-0
Fax: 49 2104 9509-99
e-mail: indus.germany@snapon.com

Italy
Tel.: 00 39 02 66 04 53 70
Fax: 00 39 02 61 29 78 15
e-mail: indus.italia@snapon.com

United Kingdom
Tel.: 44 (0) 1536-413904
Fax: 44 (0) 1536-413874
e-mail: industrialuk@snapon.com

Asia
Tel.: 65-6451-5570
Fax: 65-6451-5574
e-mail: esales.sg@snapon.com

Australia
Tel.: 61 2 9837 9100
Fax: 61 2 9624 2578
e-mail: SOTA.customerservice@snapon.com