



LOW SPEED RIGHT ANGLE SANDER

*Specifically for Alloys Such as
Titanium, Inconel & Stainless Steel*



3300 RPM

12000 RPM

***Sand Titanium with
Little to No Sparks!***

Also:

- Better Surface Finish
- Less Surface Heat
- Same Material Removal Rate



LOW SPEED RIGHT ANGLE SANDER



Features and Benefits:

- 0.5 hp
- 1/4" Collet
- Robust Planetary Gears
- Drop-in Motor - Ease of Service




Right Angle Die Grinders



Model Number	Free Speed	Weight		Length		Air Consumption		Collet Size	Exhaust
	rpm	lb	kg	in	mm	cfm	l/s		
0.5 hp (0.37 kW) – Lever Throttle – 200 Series Collet									
SAG05S33	3300	2.2	1.0	8.2	208	23	11	1/4"	Rear
SAG05S54	5400	2.2	1.0	8.2	208	23	11	1/4"	Rear

General: Air Inlet Size: 1/4" NPT • Recommended Hose Size: 3/8" (10 mm) • Performance rated @ 90 psig (6.2 bar) air pressure

Coming Soon!

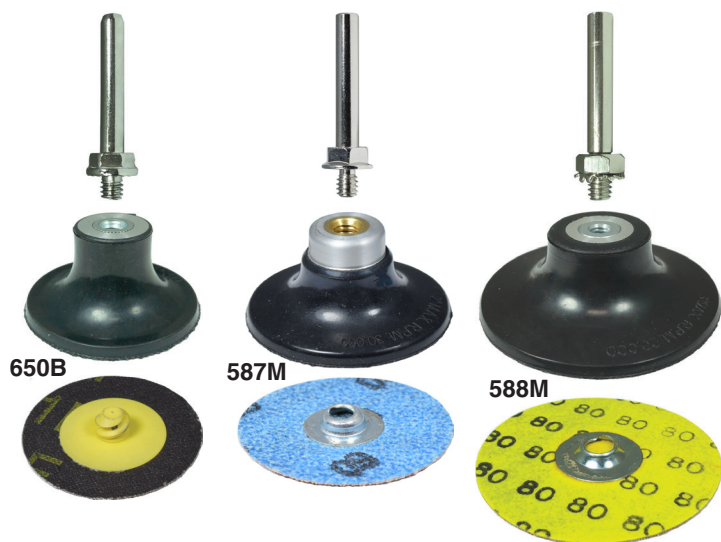

Speed-Lok Backing Pads

- 1/4" Shank
- 1/4"-20 Thread

Part Number	Type	Diameter		Max. rpm
		in	mm	
650B	R (plastic)	2	50	30000
587M	S (metal)	2	50	30000
588M	S (metal)	3	75	20000

*Sanding Disc Not Included

siouxtools.com



250 Snap-on Drive
P.O. Box 1596
Murphy, North Carolina USA 28906
PH: 828.835.9765
FAX: 828.835.9685
TOLL FREE: 866.259.7291
TOLL FREE FAX: 800.722.7236

Belgium
Tel.: 32 (0)14 23 19 67
Fax: 32 (0)14 23 26 27
Email: Industrial.be@snapon.com

Netherlands
Tel.: 31 (0)88 0104000
Fax: 31 (0)88 0104010
Email: Industrial.nl@snapon.com

Latin America
Tel.: 786-254-7765
Fax: 786-534-9350
e-mail: latinamerica.caribbean@snapon.com

Germany
Tel.: 49 2104 9509-0
Fax: 49 2104 9509-99
e-mail: indus.germany@snapon.com

Italy
Tel.: 00 39 02 66 04 53 70
Fax: 00 39 02 61 29 78 15
e-mail: indus.italia@snapon.com

United Kingdom
Tel.: 44 (0) 1536-413904
Fax: 44 (0) 1536-413874
e-mail: industrialuk@snapon.com

Asia
Tel.: 65-6451-5570
Fax: 65-6451-5574
e-mail: esales.sg@snapon.com

Australia
Tel.: 61 2 9837 9100
Fax: 61 2 9624 2578
e-mail: SOTA.customerservice@snapon.com