



ENGINEERED TO BE
FEARLESS



High-Quality KEYLESS CHUCKS
added to our
High Quality DRILLS
to fit all your drilling needs!

3/8" & 1/2" CHUCKS

SDR10P7RK4




2-Sleeve Allows Safe Tightening
Without Using Drill Power

700 RPM Gear Box

Internal Locking Mechanisms

Rapid Reverse Button

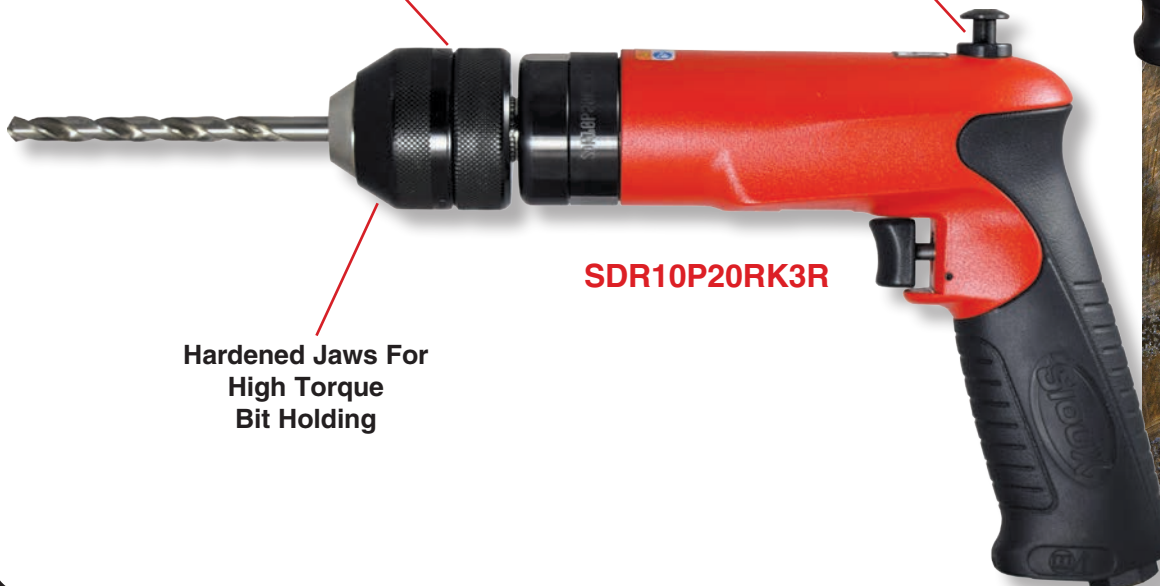

SDR10P20RK3R

Hardened Jaws For
High Torque
Bit Holding

KEYLESS CHUCK PISTOL GRIP DRILLS

PISTOL GRIP DRILLS



SDR10P20RK3

CE

- Keyless Chuck
- Trigger Start
- Ergonomic Grip

Model Number	Chuck Capacity		Free Speed	Weight		Length		Side To Center		Maximum Air Consumption		Spindle Thread
	in	mm	rpm	lb	kg	in	mm	in	mm	cfm	l/s	
0.60 hp (0.45 kW) – Rapid Reverse												
SDR6P7RK4RR	1/2	13	700	3.1	1.40	9.5	241	0.8	20	25	12	1/2"-20
SDR6P20RK3RR	3/8	10	2000	2.4	1.25	7.9	200	0.8	20	25	12	3/8"-24
SDR6P20RK4RR	1/2	13	2000	2.7	1.20	8.3	210	0.8	20	25	12	1/2"-20
SDR6P25RK3RR	3/8	10	2500	2.4	1.25	7.9	200	0.8	20	25	12	3/8"-24
SDR6P25RK4RR	1/2	13	2500	2.7	1.20	8.3	210	0.8	20	25	12	1/2"-20
1 hp (0.75 kW) – Rapid Reverse												
SDR10P7RK4R	1/2	13	700	3	1.36	8.8	224	0.8	20	30	14	1/2"-20
SDR10P20RK3R	3/8	10	2000	2.6	1.15	7.6	195	0.8	20	30	14	3/8"-24
SDR10P20RK4R	1/2	13	2000	2.8	1.27	7.6	195	0.8	20	30	14	1/2"-20
SDR10P25RK3R	3/8	10	2500	2.6	1.15	7.6	195	0.8	20	30	14	3/8"-24
SDR10P25RK4R	1/2	13	2500	2.8	1.27	7.6	195	0.8	20	30	14	1/2"-20
1 hp (0.75 kW) – Shuttle Reverse												
SDR10P3RK4	1/2	13	300	3.6	1.60	9.1	230	0.8	20	30	14	1/2"-20
SDR10P5RK4	1/2	13	500	3.6	1.60	9.1	230	0.8	20	30	14	1/2"-20
SDR10P7RK4	1/2	13	700	3.5	1.60	9.5	241	0.8	20	30	14	1/2"-20
SDR10P12RK4	1/2	13	1200	3.6	1.60	9.1	230	0.8	20	30	14	1/2"-20
SDR10P20RK3	3/8	10	2000	2.7	1.20	8	203	0.8	20	30	14	3/8"-24
SDR10P20RK4	1/2	13	2000	3	1.36	8.4	213	0.8	20	30	14	1/2"-20
SDR10P25RK3	3/8	10	2500	2.6	1.15	7.6	195	0.8	20	30	14	3/8"-24
SDR10P40RK3	3/8	10	4000	2.6	1.15	7.6	195	0.8	20	30	14	3/8"-24

3/8" & 1/2" CHUCKS

Chuck Capacity	Thread Size	Chuck Part No
1/16 – 1/2"	1/2"-20	SP67397
1/32 – 3/8"	3/8"-24	SP67398



SP67397



SP67398