





Sta-Plex™ Extreme Pressure Premium Red Grease, 14 Wt Oz
 No. SL3190 | Item# 1007890 | Case# 1007889

| | |
|---------------------------|---|
| Product Description | A superior multi-purpose certified lithium complex based NLGI #2 grease. Contains extreme pressure, anti-wear, & anti-oxidation additives. Ideal for high temperature & performance applications. Drop point 500°F |
| Applications | Ind. mining, metal production, machining, plastic molding, pumps, electric motors, ball & roller bearings, kilns, assembly plants, drying ovens, trucks, automobiles, buses, construction equipment, off-road operations, tractors mowers, reapers, water pumps |
| Unit Package Description | 14 Ounce Cartridge |
| Brand | Sta-Lube |
| Generic Description 1 | Premium Red Grease |
| Net Fill | 14 Wt Oz |
| UPC Code | 072213319002 |
| Unit Dimensions | 9.31H x 2.13W x 2.13D in |
| Units Per Case | 10 |
| Case Dimensions | 9.5H x 4.5W x 11.38D in |
| Cases Per Pallet | 150 |
| Case Weight | 10 lbs |
| I 2 of 5 Code | 30072213319003 |
| Appearance | Red Semi-Solid to Solid Grease |
| Base Type | Lithium Complex |
| Flash point (F) | 475°F |
| Flash point (C) | 246°C |
| Flammability Class - CPSC | None |
| Spec Gravity Concentrate | 0.9 at 60°F |
| NLGI Grade | 2 |
| Timken OK Load Lbs. | 60 Lbs Min |
| Plastic Safe | Not Determined |
| Evaporation Rate | <1 (butyl acetate=1) |

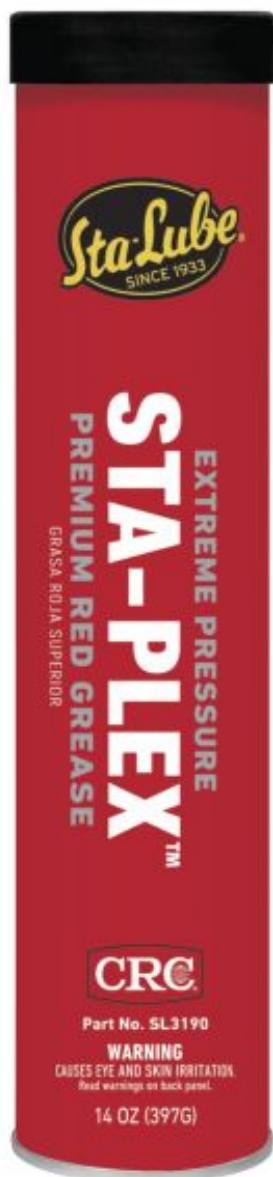

Last revised: 7/30/2019
 Page 1 of 2



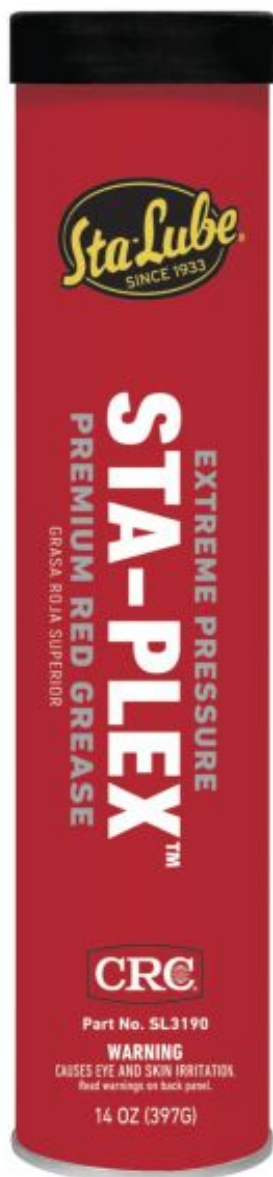

| | |
|---------------------------------|---|
| Working Temp (F) | -20 to 325°F |
| Working Temp (C) | -27 to 162°C |
| 4 Ball EP | 77 LWI, 500 Kg Weld |
| 4 Ball Wear | 0.4 typical; 0.6 Max |
| Drop Point | 500+ °F |
| Elastomer Compatibility | 0 to 30% vol; 0 to 15 hard |
| Leakage | 10g Max |
| Low Temp Torque | 15.5 Max |
| Oil Separation | <5 |
| Oxidation Stability | 5 |
| Pour Point (F) | 5°F |
| Pour Point (C) | -15°C |
| ISO Viscosity Grade | 230 |
| Water Washout | <5 |
| Worked Penetration | 265 to 295 |
| Propellant | None |
| NSF Category Code | H2 |
| NSF Number | 145511 |
| DOT Proper Shipping Name | Not Regulated |
| VOC % (Consumer Product def) | 1 |
| VOC g/L (Consumer Product def) | 9 |
| VOC lbs/gal (Consumer Prod def) | 0.075 |
| VOC Category | Not Regulated |
| Removal (How To) | Remove with a degreaser or brake cleaner product. |

Last revised: 7/30/2019
Page 2 of 2