


B400

Machine Reamer Extremely Unequal Spacing

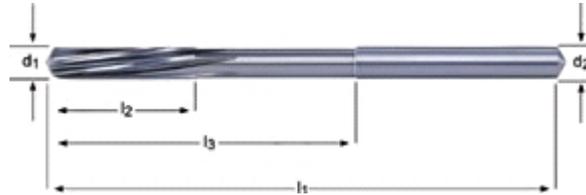

d_1 R mm	l_1 mm	l_2 mm	l_3 mm	z	d_2 R _{h9} mm	e-code		USD
1.0	34	6	15	3	1.0	B4001.0	1)	96.50
1.2	38	8	16.5	3	1.2	B4001.2	1)	94.10
1.4	40	8	18	3	1.4	B4001.4	1)	100.00
1.5	40	8	18	3	1.5	B4001.5	1)	76.70
1.6	49	11	26	3	1.6	B4001.6	1)	103.00
1.8	49	11	25	4	1.8	B4001.8	1)	113.00
2.0	49	11	24	4	2.0	B4002.0	1)	81.60
2.2	57	15	30	4	2.2	B4002.2	1)	115.00
2.5	57	15	28	4	2.5	B4002.5	1)	87.20
2.8	61	15	32	4	2.8	B4002.8	1)	125.00
3.0	61	15	30	6	3.0	B4003.0	1)	96.10
3.2	70	18	33	6	3.2	B4003.2	1)	119.00
3.5	70	18	33	6	3.5	B4003.5	1)	105.00
4.0	75	19	44	6	4.0	B4004.0	1)	124.00
4.5	80	21	46	6	4.5	B4004.5	1)	175.00
5.0	86	23	53	6	5.0	B4005.0	1)	149.00
5.5	93	26	56	6	5.6	B4005.5	1)	157.00
6.0	93	26	56	6	5.6	B4006.0	1)	168.00
6.5	101	28	63	6	6.3	B4006.5	2)	239.00
7.0	109	31	69	6	7.1	B4007.0	2)	264.00
8.0	117	33	75	6	8.0	B4008.0	2)	211.00
9.0	125	36	81	6	9.0	B4009.0	2)	262.00
10.0	133	38	87	6	10.0	B40010.0	2)	267.00
12.0	151	44	105	6	10.0	B40012.0	2)	314.00

d ₁ R mm	l ₁ mm	l ₂ mm	l ₃ mm	z	d ₂ R _{h9} mm	e-code		USD
14.0	160	47	110	8	12.5	B40014.0	²⁾	410.00
16.0	170	52	120	8	12.5	B40016.0	²⁾	459.00
18.0	182	56	130	6	14.0	B40018.0	³⁾	485.00
20.0	195	60	137	6	16.0	B40020.0	³⁾	537.00

¹⁾Solid Carbide

²⁾Carbide Head

³⁾Carbide Tipped