

Profile Milling

CoroMill® 200 P M K S N H

Stable rougher and versatile tool

Excellent choice for general milling as well as for die and mould-making and should be the first choice for roughing operations. Strong cutting edges make the cutter perfect for tough conditions with interruptions (holes, gaps etc.) and/or abrasive scale (skin).

- Diameter: 25–160 mm (1.000–10.000 inch)



CoroMill® 210 P M K S H

High feed face and plunge milling

The CoroMill® 210 is a very productive roughing concept to use when high metal removal rate is the first priority. A 10° entering angle allows extreme feed rates when face milling. This directs the cutting forces in an axial direction which provides a stable cutting action and no vibration tendency.

- Diameter:
25–66 mm (1–2.5 inch)
52–160 mm (2–6 inch)
- Max. cutting depth:
1.2 mm (0.047 inch)
2.0 mm (0.079 inch)
- Cutting edges: 4



CoroMill® 216 P M K S N H

Metal remover for rough and semi-finish profiling

A robust ball nose end mill for roughing and semi-finishing of curved surfaces. The tools are easy to apply in machining centres, CNC milling machines, and copy-milling machines for die and mould, aerospace, automotive, and associated industries.

- Diameter: 10–50 mm (0.375–2 inch)
- Max. cutting depth:
Varies by insert size
- Cutting edges: 2



CoroMill® 300 P M K S N H


Light cutting face and profile milling cutter

Round insert cutter for a broad range of operations such as face milling, pocketing, and profiling. Its light cutting action allows for smooth entries and exits and for use of extended tool set-ups. The cutters generate low cutting forces and little heat when machining with small depths of cut. This allows the table feed to be increased five to ten times.

- Diameter:
Neutral design: 10–42 mm (0.375–1.25 inch)
Positive design: 25–200 mm (1–8 inch)



 Click the product to see it online

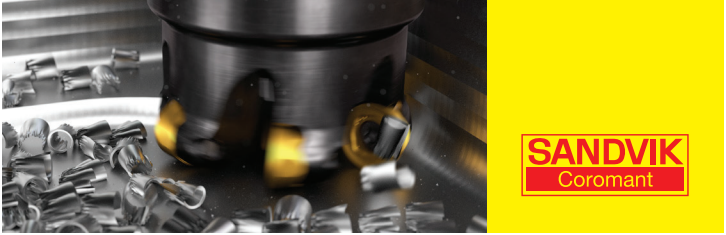

Profile Milling

CoroMill® 419 P M K S H

Five edged multi-material high feed cutter

High-feed milling concept with five edges for roughing to semi-finishing. It offers excellent performance in many material groups and has great possibilities for optimization. The high feed and light-cutting action enable a soft sound, creating an operator-friendly environment.

- Diameter: 32-100 mm (1.25-4.0 inch)
- Max. cutting depth: 2 mm (0.079 inch)
- Cutting edges: 5



CoroMill® 600 P M S H

Secure machining with the iLock™ interface

Round insert concept with positive axial angle. The positive and optimized cutting action is particularly suitable for heat-resistant materials. The unique iLock™ solution provides easy and accurate insert indexing, increased reliability and considerably improved tool life.

- Diameter: 25-100 mm (1-2.5 inch)
- Max. cutting depth: 12 mm ic.: 6 mm (0.236 inch)
10 mm ic.: 5 mm (0.197 inch)
- Cutting edges: 4



www.dglsupply.ca • 1-800-923-6255

CoroMill® 415 P M S H

Cost-efficient small diameter high feed cutter

Reduced cost per component and increased productivity thanks to the high metal removal rate and the four-edged inserts. CoroMill® 415 with iLock® technology is a reliable and secure solution, resulting in less scrap workpieces. The iLock® insert seat also makes the small inserts easier to handle.

- Diameter: 13-32 mm (0.5-1.25 inch)
- Max. cutting depth: IC05: ap max 0.85 mm (0.034 inch)
IC07: ap max 1.2 mm (0.047 inch)
- Cutting edges: 4



Didn't find what you were looking for?

Find the full selection of Milling tools and solutions on our website, by clicking the button below.

[Complete Milling Assortment](#)

Looking for more support?

We're always looking to support our customers as best we can to ensure your results exceed expectations. By changing cutting feeds and speeds you can get the most out of your tool, click the button below to see how.

[Access ToolGuide™](#)

If you still have any questions, we're available 24/7 via our LiveChat functionality.

[Ask us a Question](#)



www.sandvik.coromant.com