



PLIERS, CLAMPING, & CUTTING

TABLE OF CONTENTS

XL SERIES PLIERS	742-743
LOCK JOINT PLIERS	744
POWER-TRACK® II PLIERS	745
ASSORTED PLIERS SETS	746
NEEDLE-NOSE PLIERS	747-748
CUTTING PLIERS	749-752
LINEMAN'S PLIERS	752-753
SPECIALTY PLIERS.	754
MINIATURE PLIERS	755
LOCKING PLIERS	756-762
LOCKING C-CLAMPS	762-765
SAFETY WIRE TWISTERS.	766
WIRE STRIPPERS & CUTTERS	767
AUTOMOTIVE PLIERS	768-769
RETAINING RING PLIERS SETS	770, 772
LARGE PLIERS SET	771
RETAINING RING PLIERS	773-774
1000V PLIERS	775-781
HACKSAW	782
C-CLAMPS	782-784
EYE BOLTS	785
SNIPS	785-787
MULTI-PURPOSE TOOLS	787
KNIVES.	788

PROTO

PROTO® STAINLESS STEEL ELECTRICIAN'S SCISSORS

A handy electrician's tool that can accomplish common tasks like stripping, crimping, cutting, and snipping from thin delicate wires to thicker multi-core cables, conveniently locked on the belt until needed.



Built-in wire stripper can strip and crimp for AWG 12, 14 and 16 cables.

Stainless steel construction.

Cuts multi-wire cables and snips tiny wires.

Micro anti-slip teeth on blades for better cutting grip.

Ergonomic handles with hole for tethering.

Includes a holder with a quick release button and a belt clip.



SAFETY WIRE PLIERS

Safety wire is a type of positive locking device that prevents fasteners from loosening due to vibration and other forces. The presence of safety wiring also serves to indicate that the fasteners have been properly tightened.

Safety wire is available in a variety of gauges and materials, depending on the application. In aircraft and racing applications, stainless steel wire is used, most commonly in .032" diameter. Typically, the wire is threaded through a hole drilled into a fastener or part, then twisted and anchored to a second fastener or part, then twisted again.



LOCKING PLIERS

Multiple jaws for a wide range of applications.



STRAIGHT



CURVED



LONG NOSE



CHAIN



CLAMPING



WELDING



GRIP HOLDER



ERGONOMIC

SLIP-JOINT PLIERS

Adjustable for a variety of general uses.



**TONGUE
AND GROOVE**



COMBINATION



THIN NOSE



HOSE CLAMP

FIXED-JOINT PLIERS

Flush joint design for specialty jaws.



NEEDLE-NOSE



DUCKBILL



**DIAGONAL
CUTTING**



LINEMAN'S

INSULATED PLIERS

Insulated to 1000 volts AC and 1500 volts DC.



MULTIGRIP



FLAT NOSE



END CUTTER



BENT NOSE

XL SERIES

- › Combination pliers have shear type cutters.
- › Accurately machined joints assembled with permanent rivet for strength and precision movement.
- › Pliers with teeth on inside joint are milled parallel with pliers halves for perpendicular grab while pulling wire, fish tape, etc.
- › Exclusive Flush Fastener provides better access with increased user adjustability making it 30% narrower.
- › Flush Fastener allows pliers to lay flat in the work place and prevents snagging on tool belts/pouches.
- › Flush Fastener is a nut and bolt assembly and can easily be adjusted by the end user in the field.
- › Jaws are milled with deep self-gripping pipe wrench style teeth for maximum bite.
- › Combination jaws are milled with deep, sharp, lobster claw design that give two gripping areas with each position.
- › Accurately machined undercut tongue and groove points for precision movement and joint strength.

5 PIECE XL SERIES GROOVE JOINT PLIERS SET

Product #: **J260XLS**

Contents	Description
J261SGXL	Pliers, XL Series Groove Joint w/ Grip 5"
J262SGXL	Pliers, XL Series Groove Joint w/ Grip 7"
J260SGXL	Pliers, XL Series Groove Joint w/ Grip 10"
J264SGXL	Pliers, XL Series Groove Joint w/ Grip 12"
J265SGXL	Pliers, XL Series Groove Joint w/ Grip 16"

Weight (lbs): 6.15

 ASME B107.23-2004



2 PIECE XL SERIES GROOVE JOINT PLIERS SET

Product #: **J262XLS**

Contents	Description
J262SGXL	Pliers, XL Series Groove Joint w/ Grip 7"
J260SGXL	Pliers, XL Series Groove Joint w/ Grip 10"

Weight (lbs): 1.45

 ASME B107.23-2004



3 PIECE XL SERIES SLIP-JOINT PLIERS SET

Product #: **J276XLS**

Contents	Description
J276GXL	Pliers, XL Series Combo Slip-Joint w/ Grip 6"
J278GXL	Pliers, XL Series Combo Slip-Joint w/ Grip 8"
J280GXL	Pliers, XL Series Combo Slip-Joint w/ Grip 10"

Weight (lbs): 2.05

 ASME B107.23-2004




3 PIECE XL SERIES SLIP-JOINT NATURAL FINISH PLIERS SET

Product #: J276XLNFS


- Non-gripped versions are complemented with deep, strong, drop forged knurled impressions making it non-slip.
- The impressions can also be used to file off a burr.



Contents	Description
J2766XL	Pliers, XL Series Combo Slip-Joint 6" (Natural Finish)
J278XL	Pliers, XL Series Combo Slip-Joint 8" (Natural Finish)
J2800XL	Pliers, XL Series Combo Slip-Joint 10" (Natural Finish)

Weight (lbs): 1.95  ASME B107.23-2004


XL SERIES FLUSH FASTENER GROOVE JOINT PLIERS

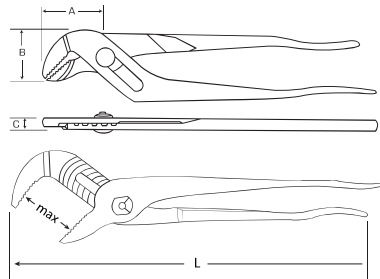

Product #	Overall Length (in) (L)	Max. Opening (in)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J261SGXL	5	35/64	31/32	3/4	15/64	0.15
J262SGXL	7	1-3/32	1-43/64	1-19/64	1-19/64	0.5
J260SGXL	10	1-49/64	2-3/32	1-19/32	27/64	0.94
J264SGXL	12	2-43/64	2-45/64	2-1/2	33/64	1.95
J265SGXL	16	4-13/64	3	3-3/32	33/64	2.6

 ASME B107.23-2004

XL SERIES FLUSH FASTENER SLIP-JOINT PLIERS



Product #	Overall Length (in) (L)	Max. Opening (in)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2766XL	6-1/2	1/2	1-1/4	1-1/4	13/32	0.5
J2786XL	8	11/16	2-3/32	1-5/16	13/32	0.64
J2806XL	10	31/64	2-11/64	1-13/32	31/64	0.9
J2766XL*	6-1/2	25/64	1-27/32	1-1/4	13/32	0.45
J278XL*	8	11/16	2-3/32	1-5/16	13/32	0.6
J2800XL*	10	31/64	2-11/64	1-13/32	31/64	0.9

* Natural Finish (No Grips)

 ASME B107.23-2004



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

orders.proto@sbdinc.com • +1.800.800.TOOL • Fax: +1.800.829.7809 • www.protoindustrial.com

3 PIECE LOCK JOINT PLIERS SET


Product #: **J260MGs**

Contents	Description
J262MG	Pliers, Lock Joint 7"
J260MG	Pliers, Lock Joint 10"
J264MG	Pliers, Lock Joint 12"

Weight (lbs): 3.38



LOCK JOINT PLIERS





Product #	Overall Length (in) (L)	Max. Opening (in)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J262MG	7-9/32	2	1-57/64	55/64	19/64	0.44
J260MG	9-27/32	2-1/4	2-1/8	1-7/64	19/64	0.76
J260MGLN*	10-3/64	2-1/2	2-31/64	63/64	19/64	0.78
J264MG	12-19/32	3-1/4	2-7/8	1-3/8	23/64	1.40

*Long Nose

COMBINATION SLIP-JOINT PLIERS

- Has two jaw positions and shear type wire cutter.

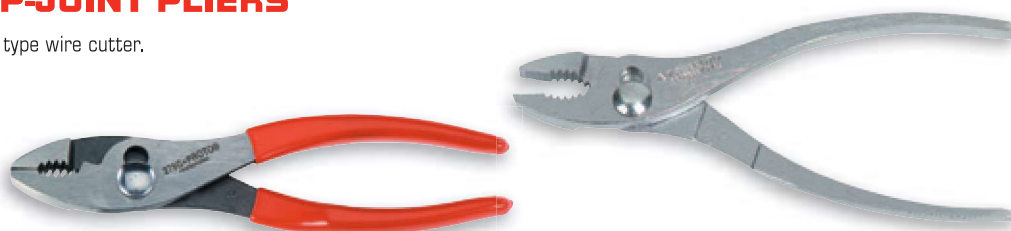

Product #	Overall Length (in) (L)	Max. Opening (in)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J275*	5-3/4	9/32	1-5/16	7/8	9/32	0.24
J276*	6-1/2	3/8	1-3/4	1-3/16	3/8	0.52
J278*	8	1	1-3/4	1-13/64	1-13/64	0.67
J280*	9-1/2	15/32	2-3/8	1-7/64	1-7/64	1.00
J275G	5-13/16	9/32	1-5/16	7/8	9/32	0.24
J276G	6-9/16	1	1-3/4	1-3/16	3/8	0.52
J278G	8-1/16	1	1-3/4	1-13/64	1-13/64	0.67
J280G	9-9/16	1-7/16	2-3/8	1-7/16	15/32	1.00

* Natural Finish (No Grips)

ASME B107.23




2 PIECE POWER-TRACK® II PLIERS SET

Product #: **J261SGS**

- › Precision milled undercut groove joint provides interlocking feature for powerful non-slip performance.
- › Special fastener ensures permanent assembly, yet allows for easy adjustment.
- › Angled teeth provide superior gripping power over standard right angled teeth.
- › Plastisol grips for added comfort.
- › Natural finish.


Contents	Description
J260SG	Pliers, Tongue and Groove 10-3/16" w/ Grip
J262SG	Pliers, Tongue and Groove 7-1/8" w/Grip
Weight (lbs): 1.30	

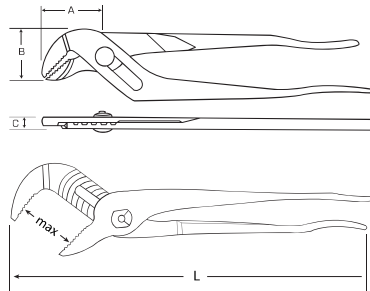

POWER-TRACK® II PLIERS

POWER-TRACK® II TONGUE & GROOVE PLIERS

- › Precision milled undercut groove joint provides interlocking feature for powerful non-slip performance.
- › Special fastener ensures permanent assembly, yet allows for easy adjustment.
- › Angled teeth provide superior gripping power over standard right angled teeth.
- › Plastisol grips for added comfort.
- › Natural finish.



Product #	Overall Length (in) (L)	Max. Opening (in)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J261SG	5	15/32	7/8	13/16	3/16	0.15
J262SG	7-1/16	1-1/8	1-3/8	1-3/4	5/16	0.48
J260SG	10-3/16	2-1/8	1-15/16	2-3/4	13/32	1.00
J264SG	12	2-5/8	2-1/4	2-3/4	3/8	1.81
J265SG	16-7/8	4-1/16	3-3/8	4-1/8	17/32	3.50

ASME B107.23



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

orders.proto@sbdinc.com • +1.800.800.TOOL • Fax: +1.800.828.7809 • www.protoindustrial.com

6 PIECE ASSORTED PLIERS SET

Product #: **J202GS**

Contents	Description
J206G	Pliers, Diagonal Cutting w/Grip 6-1/16"
J227G	Pliers, Duckbill w/Grip 7-25/32"
J228G	Pliers, Needle Nose Long 7-25/32"
J260SG	Pliers, Tongue and Groove 10-3/16" w/ Grip
J267G	Pliers, Lineman's New England Style 7-1/4"
J278G	Pliers, Combination Slip-Joint w/Grip 8-1/16"

Weight (lbs): 4.01



4 PIECE ASSORTED PLIERS SET

Product #: **J226GS**

Contents	Description
J207G	Pliers, Diagonal Cutting w/Grip 7-5/16"
J220G	Pliers, Needle Nose 6-5/8"
J260SG	Pliers, Tongue and Groove 10-3/16" w/ Grip
J272G	Pliers, End Cutting High Leverage 8-1/4"

Weight (lbs): 2.80



3 PIECE ASSORTED PLIERS SET

Product #: **J227GS**

Contents	Description
J226G	Pliers, Needle Nose w/ Cutter 6-5/8"
J260SG	Pliers, Tongue and Groove 10-3/16" w/ Grip
J278G	Pliers, Combination Slip-Joint w/Grip 8-1/16"

Weight (lbs): 1.95



3 PIECE MINI PLIERS SET

Product #: **J285GS**

Contents	Description
J235	Pliers, Small Angle Nose w/Grip 5-1/4"
J282BSG	Pliers, Needle Nose w/ Spring 5"
J285G	Pliers, Diagonal Cutting w/ Grip 4-5/8"

Weight (lbs): 0.50



2 PIECE LONG REACH NEEDLE-NOSE PLIERS SET

Product #: **J242GS**

- › Plastisol grips for added comfort.



Contents	Description
J240G	Pliers, Needle-Nose Long Reach 11-9/16"
J241G	Pliers, Bent Nose Long Reach

Weight (lbs): 1.50



NEEDLE-NOSE PLIERS

- › Induction hardened cutting edges.
- › Diamond serrated jaws.
- › Plastisol grips for added comfort.

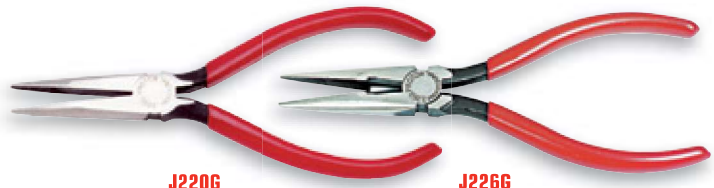

J220G



J226G

Product #	Cutter Feature	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J282G	No	4-7/8	1-3/16	7/16	1/4	0.16
J229-03G	No	5-9/16	1-11/16	1/2	9/32	0.23
J220G	No	6-5/8	1-7/8	11/16	3/8	0.35
J226G	Yes	6-5/8	1-7/8	11/16	3/8	0.34
J226-01G	Yes	7-1/2	2-5/8	3/4	3/8	0.40

ASME B107.20M

NEEDLE-NOSE PLIERS - COIL SPRING

- › Induction hardened cutting edges.
- › Diamond serrated jaws.
- › Coil spring.
- › Plastisol grips for added comfort.

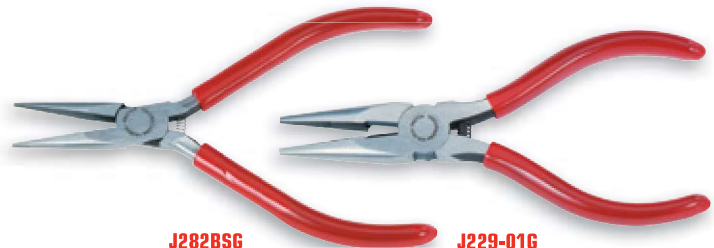

J282BSG

J229-01G

Product #	Cutter Feature	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J282BSG	No	5	1-3/16	7/16	1/4	0.16
J229-01G	Yes	5-9/16	1-11/16	1/2	9/32	0.23

ASME B107.20M




WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

orders.proto@sbdinc.com • +1.800.800.TOOL • Fax: +1.800.828.7809 • www.protoindustrial.com

NEEDLE-NOSE PLIERS - LONG REACH


- › Extra-long handle allows greater access to confined, restricted areas.
- › Improved fulcrum point provides more holding power at the tip with less gripping effort.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2406	11-9/16	2-13/16	23/32	13/32	0.63

NEEDLE-NOSE PLIERS - LONG


- › Diamond serrated jaws.
- › Plastisol grips for added comfort.

**J2286****J2226****J2236**

Product #	Description	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)	ASME Spec
J2286	Long - Long handle for added leverage.	7-25/32	1-9/16	17/32	7/16	0.38	ASME B107.13
J2226	Long Thin - Very thin nose allows access into minimum clearance areas.	7	2-1/8	11/16	11/32	0.28	ASME B107.13
J2236	Long Extra Thin - Extra slim-nose pliers for light precision work. Designed for gripping, looping, and twisting wire in confined areas.	6-5/32	2-5/32	1/2	9/32	0.20	ASME B107.20

BENT NOSE NEEDLE-NOSE PLIERS

- › 78° angle to reach around obstructions.
- › Thin nose allows access into tight areas.
- › Diamond serrated jaws.
- › Plastisol grips for added comfort.




Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2256	6-1/2	1-5/8	3/4	3/8	0.42

 ASME B107.500



BENT NOSE NEEDLE-NOSE PLIERS - LONG REACH


- › Extra-long handle allows greater access to tight areas.
- › Improved fulcrum point provides more holding power with less gripping effort.
- › Bent nose design to reach around obstructions.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J241G	11-3/8	2-9/16	23/32	13/32	0.62

DUCKBILL PLIERS

- › Wide, flat nose for better grip than standard needle-nose pliers.
- › Diamond serrated jaws.
- › Long handle for added leverage.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J227G	7-25/32	1-9/16	17/32	7/16	0.38

ASME B107.13

6 PIECE CUTTING PLIERS SET

Product #: **J2016S**

Contents	Description
J204G	Pliers, Diagonal Cutting w/Grip 4-7/16"
J209G	Pliers, Diagonal Cutting HD w/Grip 7-5/16"
J226-01G	Pliers, Needle Nose w/ Spring and Cutter 7-1/2"
J229-01G	Pliers, Needle Nose w/ Spring and Cutter 5-9/16"
J269G	Pliers, Lineman's High Leverage 9-1/4"
J272G	Pliers, End Cutting High Leverage 8-1/4"

Weight (lbs): 3.90



3 PIECE CUTTING PLIERS SET

Product #: **J2286S**

Contents	Description
J210AHG	Pliers, Diagonal Angled Head 8-1/8"
J226G	Pliers, Needle Nose w/ Cutter 6-5/8"
J269G	Pliers, Lineman's High Leverage 9-1/4"

Weight (lbs): 2.19



DIAGONAL CUTTING PLIERS WITH GRIP

- › Induction hardened cutting edges.
- › Thin narrow jaws for access in tight areas.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J285G	4-5/8	13/32	7/16	1/4	0.13
J204G	4-7/16	18/32	9/16	5/16	0.22
J205G	5-1/16	3/4	19/32	3/8	0.24
J206G	6-1/16	13/16	3/4	7/16	0.40
J207G	7-5/16	1	7/8	15/32	0.50

 ASME B107.11

DIAGONAL CUTTING PLIERS - COIL SPRING

- › Coil springs.
- › Induction hardened cutting edges.
- › Thin narrow jaws for access in tight areas.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J285BSG	4-5/8	13/32	7/16	1/4	0.13
J204SG	4-7/16	18/32	9/16	5/16	0.22


 ASME B107.11

DIAGONAL CUTTING PLIERS - ANGLED HEAD

- › Angled head for work in confined areas.
- › Plastisol grips for added comfort.




Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J210AHG	8-1/8	3/4	1-7/32	5/32	0.64



HEAVY-DUTY DIAGONAL CUTTING PLIERS

- › Induction hardened cutting edge.
- › Powerful leverage cuts heavy wire with ease.
- › Plastisol grips for added comfort.

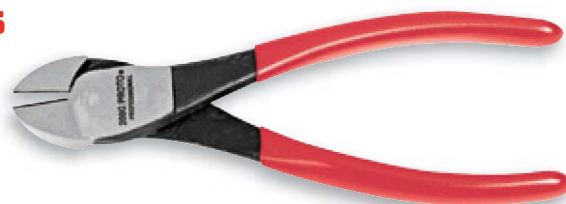


Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2096	7-5/16	2-5/32	7/8	1/2	0.58
J2106	8-1/2	3/4	1-7/32	15/32	0.64

ASME B107.11

DIAGONAL PLASTIC CUTTING PLIERS

- › Adjusting set screw allows fast, precise cutting and prevents cutting edges from damaging each other.
- › Coil spring for reduced hand fatigue.
- › Induction hardened cutting edges.
- › Plastisol grips for added comfort.

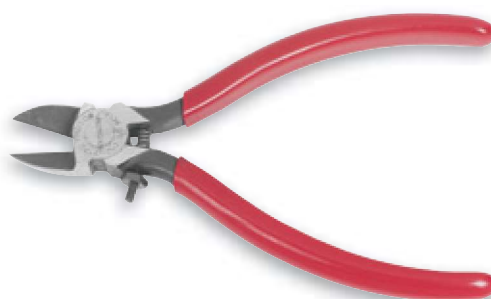

Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2126	6-3/4	3/4	3/4	7/16	0.39
J2136	7-5/16	1	29/32	1/2	0.53



HIGH LEVERAGE DIAGONAL CUTTING PLIERS LONG REACH - ANGLED HEAD

- › Extra-long handle provides high leverage cutting capabilities with less user effort.
- › 30° angled head for hard-to-reach areas.
- › Wide handle contour for less fatigue.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2446	11-1/8	1	63/64	63/64	0.94



DIAGONAL CUTTING PLIERS LONG REACH - GRIPPING TIP

- › Cutting and gripping capabilities in one tool.
- › Serrated gripping surface at tips.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2466	11-1/8	27/32	63/64	63/64	0.74

END-CUTTING PLIERS - HIGH LEVERAGE

- › Semi-flush cutting in areas inaccessible to side-cutting pliers.
- › High leverage for easy cutting of most wires and nails.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2726	8-1/4	5/16	1-3/4	1-3/16	0.90

ASME B107.20

LINEMAN'S PLIERS

- › For utility linemen, wiring and electrical equipment installation, and maintenance.
- › Induction hardened cutting edges and diamond serrated jaws.
- › Built-in insulation crusher.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2686	8-5/8	1-1/2	1-3/16	5/8	0.98

ASME B107.20

LINEMAN'S PLIERS - NEW ENGLAND STYLE

- › Slim rounded nose for easy access in restricted spaces.
- › Diamond serrated jaws.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2666	6-3/16	1-3/32	29/32	1/2	0.50
J2676	7-1/2	1-9/32	1-1/8	1/2	0.67

ASME B107.20

LINEMAN'S PLIERS - HIGH LEVERAGE

- › Jaws have offset rivet for increased leverage.
- › Designed for cutting No. 8 and other large wires.
- › Diamond serrated jaws.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J269G	9-1/4	1-3/16	1-3/32	5/8	1.10

ASME B107.20

LINEMAN'S PLIERS - PIPE JAW

- › Serrated flat nose jaws with toothed pipe grip.
- › Plastisol grips for added comfort.




Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J268PJG	8-3/8	1-3/4	1-1/16	17/32	0.87

IRON WORKER'S PLIERS

- › Designed to tie and cut wire associated with reinforcing bar.
- › Hook bend in handle to reduce slippage when gripping and pulling.
- › Coil spring holds jaws open, yet close easily.
- › Plastisol grips for added comfort.




Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J269WSG	9-1/4	1-9/16	1-9/32	5/8	1.16



SMALL ANGLE NOSE PLIERS

- › Nose angled for easy access.
- › Angled teeth provide superior gripping power over standard right angled teeth.
- › Plastisol grips for added comfort.




Product #	Overall Length (in) (L)	Max. Opening (in)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J235	5-1/4	5/8	3/4	5/8	11/64	0.10



THIN NOSE SLIP-JOINT PLIERS

- › Easy access to tight areas.
- › Has two jaw positions and shear type wire cutter.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Max. Opening (in)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)	Weight (lbs)
J2026	6-11/16	3/16	1-15/16	1-1/16	3/16	0.47

ASME B107.23

SOFT JAW - CANNON PLUG PLIERS

- › Capacity of 3/4" to 2-1/2".
- › Four position pivot design provides greater concentricity.
- › Replaceable urethane padded jaws protect work piece from marking or scratching.
- › Plastisol grips for added comfort.




Product #	Overall Length (in) (L)	Max. Opening (in)	Replacement Item	Weight (lbs)
J2536	9-1/2	2-1/2	253GRK	0.54



HOSE CLAMP PLIERS

- › Installs and removes wire spring tension clamps.
- › Two position jaws grip full range of clamp sizes.
- › Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Weight (lbs)
J2526	7-3/4	0.56





6 PIECE MINIATURE PLIERS SET

Product #: J2806SMP

- › Slip-resistant Electro-Static Discharge (ESD) cushioned grips provide comfort and ease of use.
- › Pliers are hot-drop forged with a high polish finish for strength and cleaning ease.
- › Hardened and tempered jaws for strength and durability.
- › Dual leaf spring design helps increase durability while allowing the jaws to be maintained in the open position for quick use.
- › Full flush and semi-flush cutting edges are honed and electronically induction hardened for long life wire cutting.

Contents	Description
1	Mini diagonal cutter, tapered head, semi-flush
1	Mini diagonal cutter, oval head, flush
1	Mini slim needle-nose, not serrated jaw
1	Mini needle-nose, serrated jaw
1	Mini transverse end cutter, flush
1	Mini angled cutter, flush

Weight (lbs): 1.30



MINIATURE PLIERS

4 PIECE MINIATURE PLIERS SET

Product #: J2804SMP


Contents	Description
1	Mini diagonal cutter, tapered head, semi-flush
1	Mini diagonal cutter, oval head, flush
1	Mini curved long nose, serrated jaw
1	Mini long nose with cutter

Weight (lbs): 0.90



MINIATURE PLIERS

- › For use in limited access or confined areas.
- › Pliers are hot-drop forged with a high polish finish for strength and cleaning ease.
- › Hardened and tempered jaws for strength and durability.
- › Dual leaf spring design helps increase durability while allowing the jaws to be maintained in the open position for quick use.
- › Slip-resistant Electro-Static Discharge (ESD) cushioned grips provide comfort and ease of use.
- › Full flush and semi-flush cutting edges are honed and electronically induction hardened for long life wire cutting.
- › Cushion grip handles on electrical service pliers meet or exceed the electrostatic discharge (ESD) static decay specifications for MIL-PRF-81705D and ESD S.541 (formerly EIA-541).



Product #	Style	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Jaw Thickness (in) (C)
J2834FCMP	Traverse Cutter Pliers	4-1/2	15/16	7/16	1-7/8
J2836SCMP	End Cutting Nippers	4	1/4	7/16	3/4
J2838FCMP	Angle Cutter Pliers	4-1/2	3/8	7/16	1
J2856RNMP	Solid Joint Pliers	4-1/2	1-1/8	7/16	1-7/8

B107.25M & B107.38M



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

orders.proto@sbdinc.com • +1.800.800.TOOL • Fax: +1.800.828.7809 • www.protoindustrial.com

THE QUALITY GOES INTO PROTO® LOCKING PLIERS

Designed by engineers who look at each problem with fresh eyes, no matter how simple, each Proto® tool brings quality, durability and accuracy to the job site.



AVAILABLE IN A WIDE RANGE OF JAW TYPES





6 PIECE LOCKING PLIERS WELDING SET

Product #: **J298XL**

Contents	Description
J286LNXL	Pliers, Locking Mini Long Nose 6-29/32"
J289LNXL	Pliers, Locking Mini Long Nose 9"
J290XL	Pliers, Locking Curved Jaw 7"
J291XL	Pliers, Locking Straight Jaw 7-15/32"
J292XL	Pliers, Locking Curved Jaw 9-1/4"
J293XL	Pliers, Locking Straight Jaw 10"



LOCKING PLIERS

5 PIECE LOCKING PLIERS WELDING SET

Product #: **JWK5XL**

- › Set designed for welding applications.
- › High corrosion resistant finish with welding spatter resistance.

Contents	Description
J281XL	Pliers, Locking Optimum Grip 9-27/32"
J301XL	Pliers, Locking Plug Weld 9-41/64"
J286LNXL	Pliers, Locking Mini Long Nose 6-29/32"
J274XL	Pliers, Locking Aluminum Alloy C-Clamp 11-5/12"
JMICROXL	Pliers, Micro Grip Clamp 3-5/8"

Weight (lbs): 5.06



4 PIECE HANDS FREE LOCKING PLIERS KIT

Product #: **JHK4XL**

- › A true hands-free work holding system.
- › Secure the holder, insert the locking pliers and you have a portable vice.

Contents	Description
J281XL	(2) Pliers, 10" Optimum Grip
JGHXL	(2) Camp, 6" Grip Holder

Weight (lbs): 4.63



3 PIECE LOCKING PLIERS SET

Product #: **J299RXL**



Contents	Description
J292XL	Pliers, Locking Curved Jaw 9-1/4"
J291XL	Pliers, Locking Straight Jaw 7-15/32"
J286LNL	Pliers, Locking Mini Long Nose 6-29/32"
J25TR22C	Tool Roll, 3 Pockets

Weight (lbs): 2.98

3 PIECE LOCKING PLIERS SET - NICKEL CHROME

Product #: **J299NC**



Contents	Description
J292NC	Pliers, Nickel Chrome Locking Curved 9-1/4"
J291NC	Pliers, Nickel Chrome Locking Straight 7-15/32"
J286NC	Pliers, Nickel Chrome Locking Long Nose 6-7/8"
J25TR22C	Tool Roll, 3 Pockets

Weight (lbs): 3.04

OPTIMUM GRIP LOCKING PLIERS

- › Jaw configuration combining straight, curved and convex profiles.
- › Versatile tool for securely gripping round, flat and large objects.
- › Multi-use for plumbers, welders and others.



Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J280XL	1-7/8	39/64	7-57/64	2-7/32	0.93
J281XL	2-7/16	1/2	10	2-23/64	1.50

CURVED JAW LOCKING PLIERS

- › Narrow large opening curved shaped jaws.
- › Allows firm hold on all round shapes.
- › Universal tool for multi-use.



Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J290XL	1-9/32	23/64	7-1/2	2-1/4	0.86
J292XL	1-1/2	13/32	9-21/64	2-63/64	1.41



CURVED JAW LOCKING PLIERS WITH CUTTER

- › Wide jaw profile with wire cutter.
- › Two tools in one.
- › Universal tool for multi-use.



Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J292WRXL	1-1/2	1/2	9-21/64	2-53/64	1.41
J293WRXL	7/8	21/64	5-37/64	1-51/64	0.39
J294WRXL	1-1/4	3/8	7-1/2	2-1/4	0.85




STRAIGHT JAW LOCKING PLIERS

- › Heavy-duty nose.
- › Reinforced, precisely machined teeth.
- › Strong, tough tool.
- › Helps provide secure grip for extra tough jobs.
- › General purpose for various maintenance situations.
- › Locking nut to hold adjustment during repetitive jobs.



Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J291XL	1-1/4	35/64	7-1/2	2-1/4	0.89
J293XL	1-19/32	5/8	9-23/64	2-51/64	1.45



GROOVED GRIP LOCKING PLIERS

- › Tapered groove in mobile jaw.
- › Convex jaw.
- › Firm hold of cylindrical objects without lateral movement.
- › Clears small obstacles.
- › Ideal for holding and handling drill bits, taps, fasteners and tubes in general maintenance work.



Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J282XL	1-45/64	1/2	9-23/64	2-51/64	1.36

LONG NOSE LOCKING PLIERS

- › Long slim jaw design.
- › Curved section.
- › Pliers can reach deep into recessed areas.
- › Can hold rounded objects.
- › Great for holding, placing and extracting pieces in awkward areas, engines, etc.



Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J289LNXL	2-1/2	13/32	9-1/16	2-13/64	0.93
J286LNXL	2	19/64	6-7/8	1-3/4	0.42

LOCKING CHAIN PLIERS

- › Flexible heavy-duty, heat-treated chain which adjusts quickly around any shaped object even in awkward areas.
- › Use to remove oil filters or holding odd shapes for welding.
- › Replacement chain available - J262RC.


Product #	Overall Length (in) (L)	Jaw Width (in) (B)	Jaw Thickness (in)	Weight (lbs)
J262XL	9-27/32	45/64	45/64	1.98



LOCKING CHAIN PIPE CUTTER PLUS

- › 15 alloy steel cutting wheels to evenly cut difficult-to-reach piping up to 1/4 / 6 mm wall thickness by hand ratcheting.
- › Locking mechanism- no squeezing, avoids risk of lateral movement and misaligned cutting.
- › Cuts through galvanized steel, some stainless steels, copper, PVC, and aluminum.
- › Problem solving and time saving, ideal for plumbing, heating, joinery and general maintenance.
- › Replacement chain available - J264RC.

Product #	Overall Length (in) (L)	Jaw Width (in) (B)	Jaw Thickness (in)	Weight (lbs)
J264XL	11-9/11	1-11/64	1-11/64	2.76

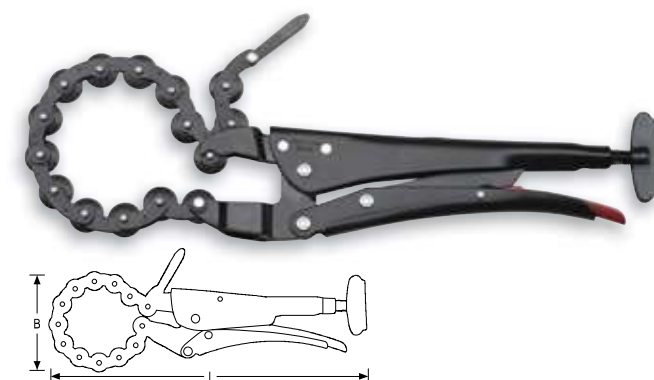




LOCKING CHAIN PIPE CUTTER

- › 13 alloy steel cutting wheels to evenly cut difficult-to-reach thin wall pipes by hand ratcheting.
- › Locking mechanism - no squeezing, avoids risk of lateral movement and misaligned cutting.
- › Butterfly screw for easy feeding as cutting.
- › Cuts through steel, copper, aluminum and some stainless steels.
- › Great for exhaust pipe repair and removal.
- › Use in plumbing and heating.
- › Replacement chain available - J263RC.

Product #	Overall Length (in) (L)	Jaw Width (in) (B)	Weight (lbs)
J263XL	9-27/32	1-3/32	1.76

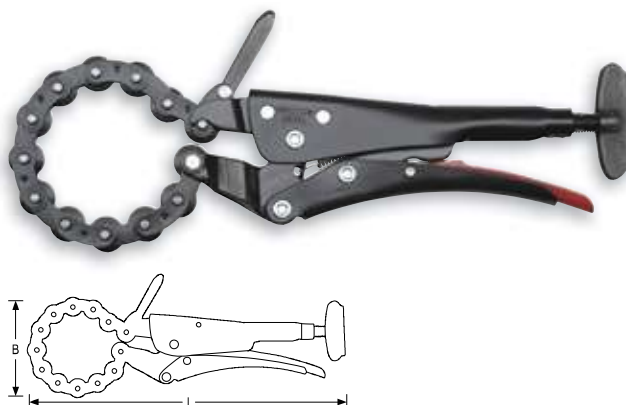

ERGO GRIP LOCKING PLIERS

- › Long jaw with straight and curved profiles for multiple applications.
- › Cushion grip helps reduce slippage with added comfort.
- › 70° angled design - allows exertion of up to 50% more force in twisting applications.
- › Helps keep wrist straight, reducing strain and general fatigue.
- › Allows use in areas of limited space.

Product #	Jaw Width (in) (B)	Overall Length (in) (L)	Weight (lbs)
J300XL	3/8	5-29/32	0.82



LOCKING SHEET METAL TOOL

- › Wide jaw profile to allow powerful grip on large thin surfaces.
- › Clamps, forms, bends, and crimps sheet metal.

Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J260XL	1-3/4	3-11/16	8	2-1/4	1.14



LOCKING PLUG WELD PLIERS

- › Copper alloy knurled swivel pad to help prevent burn through when plug welding thin sheet metal. Plug welding is advised in most American Collision Repair Procedure Manuals.
- › U-shaped mobile jaw to help provide even pressure around spot to be welded.
- › Appropriate for general maintenance work.

Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J301XL	3-13/32	1-1/4	9-3/4	2-3/16	1.12



LOCKING WELDING PLIERS


- › Firmly holds two sections together; Hands free solution in general welding and body work.
- › U-shaped jaw profile: Permits the clamping of adjacent joints and perfect visibility when welding.



Product #	Jaw Length (in) (A)	Jaw Width (in) (B)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J261XL	2-13/32	2-13/16	9-1/6	2-13/16	1.60

LOCKING STEEL C-CLAMPS


- › Wide and deep jaw profile to help clear obstacles and firmly clamp sections which locking pliers can not.
- › Clamp in close quarters for auto body work and welding shops.



Product #	Throat Height (in)	Throat Depth (in)	Jaw Width (in)	Height (in)	Overall Length (in) (L)	Weight (lbs)
J265XL	2-13/32	2-11/16	2-25/32	3-15/32	6-25/32	0.5
J266XL	4-1/64	4-1/4	4-3/8	5-57/64	11-13/64	1.93
J267XL	3-57/64	11-1/64	1/2	6-21/64	18-7/64	3.14
J268XL	3-57/64	17-11/32	1/2	6-13/32	24-1/2	3.88

LOCKING C-CLAMPS WITH SWIVEL PADS

- › Knurled swivel pads - allow non-slip, no damage parallel clamping even on tapered surfaces.
- › J269XL - small in size for delicate and fine work and ideal for electronics.
- › Safely clamps delicate surfaces - wood, plastic and soft materials.



Product #	Throat Height (in)	Throat Depth (in)	Jaw Width (in)	Height (in)	Overall Length (in) (L)	Weight (lbs)
J269XL	2-15/32	2-21/32	3/4	3-1/2	7	0.56
J270XL	3-7/8	4-5/8	1-1/8	5-11/16	11-55/64	2.1
J271XL	4-21/64	7	1-1/8	6-15/32	14-1/8	2.9
J272XL	4-19/64	11-23/64	1-1/8	6-17/32	14-1/8	3.43
J273XL	4-1/4	17-5/8	1-1/8	6-31/64	24-7/8	4.14



LOCKING PIPE CLAMP

- › Undulated U-shaped jaws to help allow secure clamping on rounded sections and perfect visibility for welding.
- › Holds two pipes well aligned for accurate welding in plumbing and general pipe and tube manipulation.



Product #	Throat Height (in)	Throat Depth (in)	Jaw Width (in)	Height (in)	Overall Length (in) (L)	Weight (lbs)
J283XL	1-3/64	3-19/64	2-53/64	3-21/64	11-31/64	2.11

MICRO GRIP CLAMP

- › Small locking clamp.
- › Ideal for even heavy-duty jobs in difficult to reach areas.
- › Applications: Auto body repair and metal fabrication.



Product #	Jaw Width (in)	Overall Length (in) (L)	Weight (lbs)
JMIXOXL	3/4	3-5/8	1.12

LOCKING ALUMINUM ALLOY C-CLAMPS

- › Modern ergonomic clamps with aircraft aluminum alloy jaws for professional welding and metal work.
- › Lightweight for comfort and ease of handling for the intensive user.
- › Spatter resistant material to ensure good working order and helps avoid tiresome cleaning.
- › Heat-treated die cast jaws to ensure resist and durability.



Product #	Throat Height (in)	Throat Depth (in)	Jaw Width (in)	Height (in)	Overall Length (in) (L)	Weight (lbs)
J274XL	4-3/64	4-19/64	4-55/64	5-7/8	11-5/32	1.4
J275XL	7-3/16	6-3/4	3/4	9-13/32	13-1/16	1.96



LOCKING ALUMINUM ALLOY U-CLAMP

- › Lightweight to help lower risk of warping and distorting of auto body panels especially new aluminum alloy panels. Also for comfort and easy handling for the intensive user.
- › Welding panels are designed to not adhere to aluminum to help ensure working order and tiresome cleaning of tools.
- › Aluminum will not weld to work piece – no hassle, time saver.
- › Jaws are made from heat-treated die cast aluminum alloy for resistance and durability.



Product #	Throat Height (in)	Throat Depth (in)	Jaw Width (in)	Height (in)	Overall Length (in) (L)	Weight (lbs)
J276XL	2-19/64	3-7/64	2-1/2	2-3/4	10-7/8	1.56

NICKEL CHROME LOCKING C-CLAMP PLIERS

- › High tensile strength microalloy steel.
- › Long slim jaw design.
- › Curved section.
- › Pliers can reach deep into recessed areas.
- › Can hold rounded objects.
- › Great for holding, placing and extracting pieces in awkward areas, engines, etc.



Product #	Jaw Length (in)	Jaw Width (in)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J266NC	4-7/64	4-1/4	4-11/32	5-55/64	1.94
J286NC	2	19/64	6-7/8	1-3/4	0.43
J291NC	1-11/32	17/32	7-1/2	2-1/4	0.87
J292NC	1-1/2	1/2	9-13/32	2-13/16	1.42
J293NC	1-11/16	19/32	9-3/8	2-13/16	1.42

LOCKING GRIP HOLDERS

- › Designed with special slot.
- › Swivel pad.
- › Butterfly screw.
- › Firmly holds 10" tools converting them into a versatile portable vise.
- › Helps ensure firm hold on all work pieces.
- › Easy to adjust.
- › Use a standard c-clamp or combined with locking tools for a hands free work.

Product #	Overall Length (in) (L)	Weight (lbs)
JGHXL	5-5/32	0.55
JMGHXL	5-5/32	0.66



JMGHXL



JGHXL



MULTI-POSITION LOCK GRIP PLIERS

- › Full rack release system.
- › Innovative unlock trigger.
- › Easy to adjust 5 positions rack.
- › Constantly parallel jaws.
- › Ergonomic handles.
- › Full range: short jaws, long jaws, big capacity, articulated jaws, mono position.



J500A



J501A



J506A



J501AMP



J505A

Product #	Jaw Width (in)	Overall Length (in) (L)	Height (in)	Weight (lbs)
J500A	43/64	9-1/16	3-11/64	1.63
J501A	43/64	9-27/32	3-11/64	1.69
J506A	43/64	9-27/32	3-11/64	1.69
J501AMP	43/64	9-49/64	3-11/64	1.67
J505A	43/64	10-25/32	3-11/32	1.79



LOCKING C-CLAMPS

CONVERT LOCKING PLIERS INTO TABLE VISES

Locking Grip Holders convert locking pliers into table vises through a table clamp adapter that holds the locking pliers in a tight and hands-free position.

JGHXL is the model that holds one large locking plier in place.

JMGHXL has the additional ability to hold small and medium locking pliers as well as larger ones.



3 PIECE SAFETY WIRE TWISTER PLIERS SET

Product #: **J194**

- › Contains three different twisters to cover almost any application.
- › Packed in handy, durable plastic storage case.

Contents	Description	Length (in)
J190	Pliers, Wire Twister Safety	8-3/8
J191	Pliers, Wire Twister Safety	10-3/8
J193	Pliers, Wire Twister Safety Deep Reach	18-1/8

Weight (lbs): 3.32



SAFETY WIRE TWISTER PLIERS

- › Safety wire is often used in aviation and other applications where vibration may cause fasteners to back out.
- › Heat-treated cutting edges for cutting tough stainless steel safety wire.
- › Flat top diamond serrations on jaws hold wire securely and resist nicking.
- › Diagonal nose allows access in tight work areas.
- › J192 Ergonomically designed.



Product	Wire Size (in)	Twist Direction	Overall Length (in) (L)	Weight (lbs)
J190	0.020 - 0.041	Right	8-3/8	0.59
J191	0.020 - 0.060	Right	10-3/8	0.85
J192	0.020 - 0.060	Right	18-1/8	0.85
J195	0.020 - 0.060	Left	10-3/8	0.85

ASME B107.500

SAFETY WIRE TWISTER REVERSIBLE & AUTOMATIC PLIERS

- › Reversible safety wire pliers provide right and left twist capability often eliminating the need for a second pliers.
- › Automatic spring return feature speeds operation and reduces fatigue.
- › Meet SAE Aerospace Standard AS 567 Twister Requirements.
- › Provides all of the features of standard Proto® Safety Wire Pliers.



Product	Wire Size (in)	Overall Length (in) (L)	Weight (lbs)
J196	0.020 - 0.041	8-3/4	0.64
J197	0.020 - 0.060	11	0.88
J198	0.020 - 0.060	12-1/2	0.91



SAFETY WIRE TWISTER - DEEP REACH

- › Designed for access into close clearance areas.

Product #	Overall Length (in) (L)	Weight (lbs)
J193	18-1/8	0.43






WIRE STRIPPER - CRIMPER

- › Strips 10-22 AWG - American Wire Gauge.
- › Box style crimp.
- › Crimps insulated and non-insulated terminals for 10-22 AWG.
- › Crimps non-insulated 7 mm and 8 mm auto ignition wire.
- › Cuts screw/bolt sizes 4-40, 5-40, 6-32, 8-32, 10-32, 10-24.
- › Anvil type wire cutter for cutting copper wire.
- › Air-pocket cushion grips for comfort.

Product #	Overall Length (in) (L)	Weight (lbs)
J299	8-1/2	0.45



WIRE STRIPPER - CUTTER

- › Strips 10-30 AWG - American Wire Gauge.
- › Wire cutter.
- › Pliers nose for pulling and looping wire.
- › Spring return and convenient handle lock.
- › Plastisol grips for added comfort.

Product #	Overall Length (in) (L)	Wire Sizes	Weight (lbs)
J297	6-1/16	10, 12, 14, 16, 18, and 20 AWG	0.21
J296	6-1/16	22, 24, 26, 28, and 30 AWG	0.21



CABLE CUTTER

- › Cuts up to 3/0 fine strand copper battery cable (not for use on steel cable).
- › Precision ground blades minimize deflection.
- › Plastisol grips for added comfort.

Product #	Overall Length (in) (L)	Weight (lbs)
J288	7-1/2	0.56



WIRE STRIPPER - PLIERS

- › Strips 10-22 AWG - American Wire Gauge.
- › Crimps insulated and non-insulated terminals for 10-22 AWG wire.
- › Crimps non-insulated 7 mm and 8 mm auto ignition wire.
- › Cuts screw/bolt sizes 4-40, 5-40, 6-32, 8-32, 10-32, 10-24 and copper wire.
- › Extended length curved cutter to handle heavier wire with less force.
- › Pliers nose designed to grip, bend, and pull wire.
- › Plastisol grips for added comfort.

Product #	Overall Length (in) (L)	Weight (lbs)
J298	8-1/4	0.5



STAINLESS STEEL ELECTRICIAN'S SCISSORS

- › Built with a complete internal stainless steel construction.
- › Blade consists of micro anti-slip teeth to help with the high leverage ratio.
- › Built-in wire stripper for AWG 12, 14 & 16.
- › Bi-material ergonomic handles with a hole for tethering.
- › Includes a holder with a belt clip.

Product #	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
J318SS	2-3/64	6-7/64	0.33



PINCH-OFF PLIERS

- › Patented clamping mechanism provides positive clamping without springs or adjustments.
- › Tested to 50,000 cycles without failure.
- › Heat-treated steel construction.
- › Swivel mounted clamps adjust to provide parallel clamping operation.
- › Cushioned hand grips.
- › For pinching-off flexible fuel lines, brake lines, and vacuum hoses in cars, motorcycles, and engines of all kinds.



Product #	Jaw Opening (in)	Jaw Width (in)	Jaw Depth (in)	Throat Depth (in)	Throat Height (in)	Max. Jaw Capacity (in)	Overall Length (in)	Weight (lbs)
JFF554	3/4	2	1/2	1-1/2	1/2	3/4	5-1/2	0.19
JFF555	2	2	1/2	1-1/2	1/2	1-1/4	9-1/4	0.78
JFF556	2-1/2	2	1/2	2-1/2	1/2	2-1/2	13-3/4	1.25



RIGID-FLEXIBLE HOSE CLAMP PLIERS

- › Complete unique locking coolant system pliers set is ideal for one-person replacement of radiators, cooling lines, etc.
- › Locking waffle-nose hose clamp pliers to access/open hard to reach flat band hose clamps (7" and 9").
- › Locking hose pinch-off pliers to pinch and lock closed vent/radiator/vacuum/fuel hoses/lines (7" and 9").
- › Packaged in sturdy nylon roll pouch.

Product #	Overall Length (in) (L)	Weight (lbs)
JFFHC4	12-19/64	3.50





ADJUSTABLE OIL FILTER PLIERS

- ▶ Heavy-duty forged jaws with three contact points to grip stubborn oil filters.
- ▶ Textured grips for non-slip operation.



Product #	Opening Range (in)	Diameter Minimum (in)	Diameter Maximum (in)	Diameter Minimum (mm)	Diameter Maximum (mm)	Height (in)	Overall Length (in)	Weight (lbs)
JFF297	2-1/4 to 5	2-1/4	5	57	127	19/32	13-19/32	1.25
JFF287	3-3/4 to 7	3-3/4	7	94	178	1	19	3.28

ALL-PURPOSE BRAKE PLIERS

- ▶ Easily installs and removes brake shoe retaining spring on drum brakes.
- ▶ Socket end removes spring from anchor stud.
- ▶ Notched and installs spring on anchor.



Product #	Overall Length (in) (L)	Weight (lbs)
J217	12-7/8	1.05



LOCK RING "HORSESHOE" WASHER PLIERS

- ▶ For spreading both soft iron "horseshoe" lock washers used on brakes and tempered steel lock rings used on gear and bearing shafts.
- ▶ Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Weight (lbs)
J2506	9	0.49



LOCK RING PLIERS - PARALLEL JAW

- ▶ For removal of lock snap rings used on bearing shafts.
- ▶ Compound leverage simplifies removal.
- ▶ Jaw tips are indented to hold ring ends and prevent breakage.
- ▶ Jaws spread 1-1/4".
- ▶ Plastisol grips for added comfort.



Product #	Overall Length (in) (L)	Weight (lbs)
J2516	10-9/16	0.68



12 PIECE CONVERTIBLE RETAINING RING PLIERS SET

Product #: J360B

- ▶ Convenient blow-molded carrying case includes storage for spare rings.
- ▶ Ring range: External (Shaft) 1/4" - 3-11/32"; Internal (Bore) 3/8" - 3".



Contents	Tip Size	Tip Angle	Length (in)	Shaft Dia. (in) (External)	Bore Dia. (in) (Internal)	Weight (lbs)
J399	.038	0°	5-7/8	1/4 - 43/64	3/8 - 9/16	0.15
J370	.038	45°	5-3/4	1/4 - 3/64	3/8 - 9/16	0.16
J371	.038	90°	5-11/16	1/2 - 25/32	3/8 - 9/16	0.16
J372	.047	0°	5-7/8	11/16 - 7/8	5/8 - 1	0.16
J373	.047	45°	5-3/4	11/16 - 7/8	5/8 - 1	0.15
J374	.047	90°	5-11/16	13/16 - 1	5/8 - 1	0.16
J385	.070	0°	7-1/2	15/16 - 1-7/16	1-1/16 - 13/4	0.29
J375	.070	45°	7-3/8	1 - 1-7/16	1-1/16 - 13/4	0.32
J376	.070	90°	7-1/8	1 - 1-1/16, 2	1-7/16 - 2	0.31
J377	.090	0°	9-1/4	1-1/2 - 3-1/2	1-13/16 - 3	0.54
J378	.090	45°	9	1-1/2 - 3-1/2	1-13/16 - 3	0.55
J379	.090	90°	8-5/8	1-1/2 - 1-3/4	1-13/16 - 3	0.56

Weight (lbs): 4.82



6 PIECE CONVERTIBLE RETAINING RING PLIERS SET

Product #: J360A

- ▶ Convenient blow-molded carrying case includes storage for spare rings.
- ▶ Ring range: External (Shaft) 1/4" - 3-11/32"; Internal (Bore) 3/8" - 3".



Contents	Tip Size	Tip Angle	Length (in)	Shaft Dia. (in) (External)	Bore Dia. (in) (Internal)	Weight (lbs)
J399	.038	0°	5-7/8	1/4 - 43/64	3/8 - 9/16	0.15
J371	.038	90°	5-11/16	1/2 - 25/32	3/8 - 9/16	0.16
J372	.047	0°	5-7/8	11/16 - 7/8	5/8 - 1	0.16
J374	.047	90°	5-11/16	13/16 - 1	5/8 - 1	0.16
J385	.070	0°	7-1/2	15/16 - 1-7/16	1-1/16 - 13/4	0.29
J376	.070	90°	7-1/8	1 - 1-1/16, 2	1-7/16 - 2	0.31

Weight (lbs): 2.10





18 PIECE LARGE PLIERS SET WITH REPLACEABLE TIPS

Product #: J361

- › Includes one internal and one external pliers.
- › Convenient blow-molded carrying case includes storage for spare rings.
- › Custom grip handles for added comfort.
- › Contains 16 interchangeable tips listed below. (Replacements available).
- › Covers ring range:
- › External 1-1/2" - 3-3/4"
- › Internal 2-7/16" - 4"
- › Spring loaded ratchet mechanism minimizes operator fatigue by allowing ring to be compressed or expanded through gradual moves and locks at desired size. Heavy and large rings are safely and easily controlled.
- › Pliers overall length 9-1/2".

Tip Size	Tip Angle
.108	0°
.108	15°
.108	45°
.108	90°
.120	0°
.120	15°
.120	45°
.120	90°

Weight (lbs): 2.50



LARGE PLIERS SET

0.108 REPLACEMENT TIPS FOR J361

Product #: J362

- › 8 Tips.
- › 2 each of 0.108 Tips in 0°, 15°, 45°, 90°.
- › Weight (lbs): 0.22



0.120 REPLACEMENT TIPS FOR J361

Product #: J363

- › 8 Tips.
- › 2 each of 0.120 Tips in 0°, 15°, 45°, 90°.
- › Weight (lbs): 0.23



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

orders.proto@sbdinc.com • +1.800.800.TOOL • Fax: +1.800.828.7809 • www.protoindustrial.com

4 PIECE CONVERTIBLE RETAINING RING PLIERS SET

Product #: J360C

- › Design permits quick change-over to work internal or external rings.
- › Pliers have no screws to tighten.
- › Pliers have a return spring designed to reduce fatigue and facilitate operation.
- › Pliers have air cushioned grips which spreads loads across the hand increasing comfort.
- › Ring range: External (Shaft) 1/4" - 2"; Internal (Bore) 3/8" - 2".



Contents	Tip Size	Tip Angle	Length (in)	Shaft Dia. (in) (External)	Bore Dia. (in) (Internal)	Weight (lbs)
J399L	.038	18°	6	1/4 - 43/64	3/8 - 9/16	0.19
J371L	.038	90°	6	1/2 - 25/32	3/8 - 9/16	0.19
J385L	.070	18°	7-1/4	15/16 - 17/16	1-1/16 - 1-3/4	0.33
J376L	.070	90°	7-1/4	1-1/16 - 2	1-7/16 - 2	0.33

Weight (lbs): 1.26



18 PIECE SMALL PLIERS SET WITH REPLACEABLE TIPS

Product #: J380

- › Includes one internal and one external pliers.
- › Covers ring range: External 1/4"-2", Internal 3/8"-2".
- › Contains 16 interchangeable tips (4 of each listed below) (Replacements available).
- › Pliers overall length 6-1/4".

Tip Size	Tip Angle
.038	90°
.047	45°
.047	0°
.070	0°

Weight (lbs): 0.64



REPLACEMENT TIPS FOR J380

Product #: J380T

- › 16 Tips.
- › 4 each of: .038 90°, .047 45°, .047 0°, .070 0°.
- › Plastic storage case.
- › Weight (lbs): 0.05





RETAINING RING PLIERS - CONVERTIBLE

- › Converts from internal to external or vice versa, when pivot screw is moved to adjacent tapped hole.
- › Use with either External or Internal Retaining Rings.
- › Fixed tips are precision formed and induction hardened for accurate fit and long wear.
- › Use the largest diameter tip that will fit the retaining ring being removed or installed.



Product #	Tip Size	Tip Angle	Overall Length (in) (L)	Shaft Dia. (in) (External)	Bore Dia. (in) (Internal)	Weight (lbs)
J399	.038	0°	5-7/8	1/4 - 43/64	3/8 - 9/16	0.15
J370	.038	45°	5-3/4	1/4 - 3/64	3/8 - 9/16	0.16
J371	.038	90°	5-11/16	1/2 - 25/32	3/8 - 9/16	0.16
J372	.047	0°	5-7/8	11/16 - 7/8	5/8 - 1	0.16
J373	.047	45°	5-3/4	11/16 - 7/8	5/8 - 1	0.15
J374	.047	90°	5-11/16	13/16 - 1	5/8 - 1	0.16
J385	.070	0°	7-1/2	15/16 - 1-7/16	1-1/16 - 13/4	0.29
J375	.070	45°	7-3/8	1 - 1-7/16	1-1/16 - 13/4	0.32
J376	.070	90°	7-1/8	1 - 1/16, 2	1-7/16 - 2	0.31
J377	.090	0°	9-1/4	1-1/2 - 3-1/2	1-13/16 - 3	0.54
J378	.090	45°	9	1-1/2 - 3-1/2	1-13/16 - 3	0.55
J379	.090	90°	8-5/8	1-1/2 - 1-3/4	1-13/16 - 3	0.56
J399L	.038	18°	6	—	3/8 - 9/16	0.19
J371L	.038	90°	6	—	3/8 - 9/16	0.19
J385L	.070	18°	7-1/4	—	1-1/16 - 1-3/4	0.33
J376L	.070	90°	7-1/4	—	1-7/16 - 2	0.33

ASME B107.19

RETAINING RING PLIERS - EXTERNAL

- › Used with External Retaining Rings.
- › Fixed tips are precision formed and induction hardened for accurate fit and long wear.



Product #	Tip Size	Tip Angle	Overall Length (in) (L)	Shaft Dia. (in) (External)	Weight (lbs)
J388*	.023	0°	5-1/4	3/16 - 15/64	0.06
J391	.038	0°	6-1/8	1/4 - 21/32	0.15
J397	.038	90°	6-1/8	1/4 - 1	0.15
J393	.070	0°	6-7/8	7/16 - 2	0.22
J395	.115	0°	9-1/8	1-1/2 - 3-1/2	0.49

*No Grip. Applies only to J388.

ASME B107.19



RETAINING RING PLIERS - INTERNAL

- Used with Internal Retaining Rings.
- Fixed tips are precision formed and induction hardened for accurate fit and long wear.



Product #	Tip Size	Tip Angle	Overall Length (in) (L)	Bore Dia. (in) (Internal)	Weight (lbs)
J390	.025	0°	5-3/8	1/4 - 5/16, 1/4 - 5/16, 1/4 - 5/16, 5/8	0.14
J389	.038	0°	5-3/8	3/8 - 9/16	0.13
J398	.038	45°	5-3/8	3/8 - 9/16, 3/8 - 9/16, 3/4 - 1	0.13
J392	.070	0°	6-1/2	1-1/16 - 13/4, 1-1/16 - 1-3/4, 1-1/16 - 1-3/4, 1-7/16 - 2	0.19
J394	.090	0°	9	1-13/16 - 3, 1-13/16 - 3, 1-13/16 - 3, 2-1/16 - 3	0.47

ASME B107.19

LARGE RETAINING RING PLIERS - INTERNAL/EXTERNAL

- Spring-loaded ratchet mechanism minimizes operator fatigue by allowing the ring to be compressed or expanded through gradual "moves" and then locks at the desired size without continued pressure on the handles. Heavy and large rings are safely and easily controlled.
- Replaceable tips in 0°, 45°, and 90° make it possible to remove and install rings in most applications. (Replacements available).



Product #	Tip Size	Tip Angle	Overall Length (in) (L)	Shaft Dia. (in) (External)	Bore Dia. (in) (Internal)	Weight (lbs)
J364	.120	0°	16-1/2	-	3-1/16 - 6	1.95
J365	.120	0°	16-1/2	3-1/2 - 6-1/2	-	1.98


ASME B107.19

REPLACEMENT TIPS FOR J364 & J365

Product #	Tip Angle	Weight (lbs)
J364-T0	0°	0.12
J364-T45	45°	0.12
J364-T90	90°	0.12



Tip Angles



0°



45°



90°

External



Internal



FACOM® VE PLIERS

- › Designed for working on live components up to 1000V AC and 1500V DC.
- › 1000V insulated grips designed for electrical safety when working on or near live components.
- › Handles designed to resist workshop chemicals (Skydrol®, chlorothene, acetone, petrol).

FACOM® 6 PIECE 1000VE PLIERS/SCREWDRIVER SET



Product #: **FW-184.J5VE**

Contents	Description
FA-185.20VE	Pliers, Half round Insulated 1000VE 7-7/8"
FA-187.18VE	Pliers, Combo Insulated 1000VE 7-1/4"
FA-192.16VE	Pliers, Diagonal Cutting Insulated 1000VE 6-1/4"
FW-ADY.1X100VE	Screwdriver, 1000V PZ1
FW-AY.4X100VE	Screwdriver, 1000V 4 mm Slot 7-7/8"
FW-AY.5.5X125V	Screwdriver, 1000V 5.5 mm Slot 8-7/8"

Weight (lbs): 2.43



FACOM® 3 PIECE VE PLIERS SET



Product #: **FW-MOD.VE**

Contents	Description
FA-180.VE	Pliers, Multigrip Insulated 1000VE 10"
FA-194.17VE	Pliers, Wire Stripper Insulated 1000VE 6-1/2"
FA-391.16VE	Pliers, Diagonal Cutting Insulated 1000VE 6-1/2"

Weight (lbs): 1.66



FACOM® INSULATED VE MULTIGRIP PLIERS



Product #	Overall Length (in) (L)	Max Capacity (in)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-180.VE	10	1-9/16	1-3/16	7/8	0.78



FACOM® INSULATED VE HALF ROUND PLIERS



- › Side cutter for steel wire up to 14 AWG.
- › Serrated jaws with central area for handling rods.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-185.20VE	7-7/8	2-15/16	11/32	0.45
FA-193.16VE	6-7/8	1-13/16	11/32	0.41

FACOM® INSULATED VE COMBINATION PLIERS



- › High-frequency hardened cutting edges for power and durability.
- › Nose profile combines strength and maneuverability.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-187.16VE	6-1/2	1-11/32	3/8	0.43
FA-187.18VE	7-9/32	1-13/32	13/32	0.53



FACOM® INSULATED VE FLAT NOSE PLIERS



- › Serrated jaws for firm grip.
- › Nose designed for confined spaces.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-188.16VE	6-11/16	1-13/16	11/32	0.38
FA-188.20VE	8-1/16	2-15/16	11/32	0.42

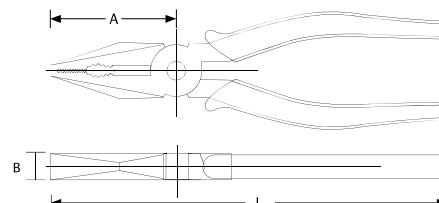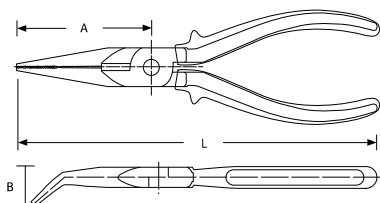



FACOM® INSULATED VE ROUND NOSE PLIERS



- › For shaping loops, bends or rings.
- › Serrated jaws.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-189.17VE	6-7/8	1-13/16	11/32	0.37

FACOM® INSULATED VE WIRE STRIPPER PLIERS



- › Jaws angled at 40°.
- › Cuts single and multi-cone wire up to 14 AWG.
- › Serrated jaws with central area for handling rods.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-194.17VE	7-11/16	1	5/8	0.38

FACOM® INSULATED VE BENT NOSE PLIERS



- › Jaws angled at 40°.
- › Cuts single and multi-cone wire up to 14 AWG.
- › Serrated jaws with central area for handling rods.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-195.16VE	6-7/8	1-5/8	11/32	0.39
FA-195.20VE	7-15/32	2-3/4	11/32	0.43

FACOM® INSULATED VE END CUTTER PLIERS



- › 1000V insulated grips designed for electrical safety when working on or near live components.
- › High-frequency hardened cutting edges ensure durable cut quality for hard wire up to 12 AWG.
- › Offset pivot to help reduce manual cutting efforts required with a center pivot point.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-190.16VE	6-1/2	1/4	7/16	0.51



FACOM® INSULATED VE DIAGONAL PLIERS



- › High-frequency hardened cutting edges ensure durable cut quality for hard wire up to 200 kg/mm.
- › Offset pivot for reduced cutting effort.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-192.14VE	5-23/32	5/8	3/8	0.36
FA-192.16VE	6-7/8	23/32	13/32	0.46
FA-192.18VE	7-15/32	25/32	7/16	0.57

FACOM® INSULATED VE DIAGONAL CUTTERS



- › Edges designed for clean cut in copper wire.
- › High-frequency hardened cutting edges for durable cut accuracy.
- › Snipe nose for maneuverability in control cabinets or cutting cable loom ties.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-391.16VE	6-11/16	3/4	13/32	0.46

FACOM® VSE PLIERS

- › 1000V insulated grips designed for electrical safety when working on or near live components.
- › 2 color warning handle insulation - color changes from orange to yellow if insulation integrity compromised.
- › Insulated to 1000V AC or 1500 DC.
- › Burnished nose.
- › Hardened throughout for overall strength.
- › Cutting edges locally heat-treated to exceed 60 HRC hardness.

FACOM® INSULATED VSE MULTIGRIP PLIERS



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-180.VSE	10-1/32	1-9/16	1-3/8	0.81



FACOM® INSULATED VSE HALF ROUND PLIERS



- › Integrated wire-cutter.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-185.20AVSE	8-9/32	2-23/32	1-3/8	0.53
FA-193.16AVSE	6-7/8	1-31/32	1-1/4	0.37

FACOM® INSULATED VSE COMBINATION PLIERS



- › Serrated jaw.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-187.16AVSE	6-1/2	1-11/32	1-3/8	0.44
FA-187.18AVSE	7-3/32	1-3/8	1-3/8	0.54
FA-187.20AVSE	7-9/32	1-43/64	1-3/8	0.69

FACOM® INSULATED VSE FLAT NOSE PLIERS



- › Serrated jaws for firm grip.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-188.16AVSE	6-11/16	1-31/32	1-15/32	0.37

FACOM® INSULATED VSE ROUND NOSE PLIERS



- › Long tip nose, serrated for shaping bends or terminals on all types of wire.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-189.17AVSE	6-7/8	1-25/32	1-5/16	0.36

1000V PLIERS



FACOM® INSULATED VSE WIRE STRIPPER



- › Strips any wire in all common electrical systems, up to 10 AWG.
- › Knob for presetting the cutting depth.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-194.17AVSE	6-7/8	7/8	5/16	0.45

FACOM® INSULATED VSE BENT NOSE PLIERS



- › Integral wire-cutter.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-195.20AVSE	7-15/32	2-17/32	1-1/4	0.43

FACOM® INSULATED VSE CABLE CUTTERS



- › High performance compact tool.
- › Forged safety stops.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-412.10AVSE	7-7/8	3-1/3	1-3/8	0.91
FA-412.14AVSE	9	1-3/16	1-3/8	1.12
FA-412.150AVSE	18-1/2	2-23/64	1-3/4	4.71

FACOM® INSULATED VSE RATCHETING CABLE CUTTERS



- › One-hand operation.
- › No cable core distortion.
- › Forged and hardened steel blade.



Product #	Size (in)	Overall Length (in) (L)	Jaw Width (in) (B)	Weight (lbs)
FA-414.45AVSE	1-3/4	12	5-5/16	2.19
FA-414.52AVSE	2	13-3/16	5-1/2	2.26



FACOM® INSULATED VSE END CUTTER PLIERS



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-190.16AVSE	6-11/16	1/4	1-3/8	0.56

FACOM® INSULATED VSE DIAGONAL PLIERS



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-192.14AVSE	6-3/32	5/8	1-3/16	0.48
FA-192.16AVSE	6-1/2	23/32	13/32	0.54
FA-192.18AVSE	7-9/32	25/32	7/16	0.60

FACOM® INSULATED VSE DIAGONAL CUTTERS



- › Inset joint.



Product #	Overall Length (in) (L)	Jaw Length (in) (A)	Jaw Width (in) (B)	Weight (lbs)
FA-391.16AVSE	6-5/16	3/4	13/32	0.47

FACOM® INSULATED VSE KNIFE



- › Thick, angled blade with flat tip.
- › Cushion handle.
- › Blade sheath.
- › Effective blade length 2".

Product #	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
FT-1820,AVSE	2-3/8	7-1/2	0.19



1000V PLIERS



FACOM® INSULATED VSE HACKSAW



- › Two blade positions.
- › Butterfly tension nut.
- › Supplied with bi-metal blade.
- › 12" blade replacement.

Product #	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
FT-602.AVSE	12	18-1/2	1.30



C-CLAMPS - HEAVY SERVICE STANDARD SCREW

- › Designed for heavy service applications where the strength of the extra heavy service C-clamp is not required.
- › Clamps have a high-strength steel frame with a hardened forcing screw.
- › Forcing screws are fitted with impact resistant pads.



Product #	Opening Range (in) (C)	Throat Depth (in) (T)	Thread Diameter (in) (D)	Minimum Test Load (lbs)	Weight (lbs)
J102GS	0-2	1-3/8	1/2	7500	1.30
J103GS	0-3	1-3/4	5/8	8750	2.60
J104GS	0- 4-1/8	2	3/4	10000	4.10
J106GS	2-6	2-1/4	3/4	11250	5.90
J108GS	4-8	2-1/4	3/4	12500	6.90
J110GS	6- 10-1/4	2-3/8	3/4	13750	8.00
J112GS	8-12	2-5/8	7/8	15000	11.6
J115GS	10-15	2-5/8	7/8	16250	15.0
J118GS	12-18	2-7/8	7/8	17500	18.2

C-CLAMPS - STANDARD SERVICE DEEP THROAT FULL LENGTH SCREW

- › Standard service, deep throat style is the most versatile and popular.
- › Hot forged for strength and hard use.
- › Forcing screw has heavy rolled Acme thread allowing the screw to turn easily under pressure and is less susceptible to damage.
- › Forcing screw has a sliding T-handle and an impact resistant pad.



Product #	Opening Range (in) (C)	Throat Depth (in) (T)	Thread Diameter (in) (D)	Minimum Test Load (lbs)	Weight (lbs)
J402	0-2	2	1/2	3500	1.30
J403	0-3	2-3/8	1/2	3500	2.00
J404	0-4	2-3/4	3/4	6500	3.50
J406	0-6	3-5/8	3/4	6600	5.00
J408	0-8	4-1/2	3/4	6900	7.00
J410	0-10	5-3/8	3/4	8000	10.5
J412	0-12	5-3/4	7/8	9500	15.5



C-CLAMPS - STANDARD SERVICE DEEP THROAT SPATTER RESISTANT FULL LENGTH SCREW

- › Forcing screw and pad are plated with copper to resist welding spatter.
- › Hot forged for strength and hard use.
- › Forcing screw has heavy rolled Acme thread allowing the screw to turn easily under pressure and is less susceptible to damage.
- › Forcing screw has a sliding T-handle and an impact resistant pad.



C-CLAMPS

Product #	Opening Range (in) (C)	Throat Depth (in) (T)	Thread Diameter (in) (D)	Minimum Test Load (lbs)	Weight (lbs)
J402S	0-2	2	1/2	3300	1.30
J403S	0-3	2-3/8	1/2	3500	2.00
J404S	0-4	2-3/4	3/4	4100	3.50
J406S	0-6	3-5/8	3/4	5400	5.00
J408S	0-8	4-1/2	3/4	5900	7.00
J410S	0-10	5-3/8	3/4	6200	10.5
J412S	0-12	5-3/4	7/8	9300	15.5




C-CLAMPS - STANDARD SERVICE EXTRA DEEP THROAT FULL LENGTH SCREW

- › Forcing screw and pad are plated with copper to resist welding spatter.
- › Up to 32% more throat depth than standard deep throat clamps.
- › Hot forged for strength and hard use.
- › Forcing screw has heavy rolled Acme thread.
- › Full length forcing screw.




Product #	Opening Range (in) (C)	Throat Depth (in) (T)	Thread Diameter (in) (D)	Minimum Test Load (lbs)	Weight (lbs)
J424	0-4	3-5/8	3/4	4100	4.80
J426	0-6	4-3/4	3/4	5400	7.00
J428	0-8	5-5/8	3/4	5900	9.80
Spatter-Resistant					
J424S	0 - 4	3-5/8	3/4	4100	4.80
J426S	0 - 6	4-3/4	3/4	5400	7.00
J428S	0 - 8	5-5/8	3/4	5900	9.80



C-CLAMPS - EXTRA HEAVY SERVICE STANDARD SCREW

- › Strongest C-clamp design.
- › Heavy-duty threaded hub provides maximum screw support.
- › Forcing screws have a square head to be turned with a wrench.
- › Forcing screws have a hardened tip.




Product #	Opening Range (in) (C)	Throat Depth (in) (T)	Thread Diameter (in) (D)	Minimum Test Load (lbs)	Weight (lbs)
J0-HD	0 - 13/16	11/16	3/8	2800	0.30
J1-HD	0 - 7/16	1-3/32	7/16	5600	1.00
J11/2-HD	0 - 1-3/4	1-7/16	5/8	8750	1.90



C-CLAMPS - EXTRA HEAVY SERVICE FULL LENGTH SCREW

- › Full length forcing screws provide greater versatility with the minimum capacity always being "0".
- › Strongest C-clamp design.
- › Heavy-duty threaded hub provides maximum screw support.
- › Forcing screws have a square head to be turned with a wrench.
- › Forcing screws have a hardened tip.



Product #	Opening Range (in) (C)	Throat Depth (in) (T)	Thread Diameter (in) (D)	Minimum Test Load (lbs)	Weight (lbs)
J2-HDL	0 - 2-3/8	1-7/8	3/4	12500	4.50
J3-HDL	0 - 3-5/16	2-5/16	7/8	16250	7.10
J4-HDL	0 - 4-5/8	2-3/4	1	20000	11.0
J5-HDL	0 - 5-3/8	3-1/16	1	23800	14.9
J6-HDL	0 - 6-5/8	3-3/8	1-1/8	27500	19.3
J8-HDL	0 - 8-1/4	3-5/8	1-1/4	31250	27.5
J10-HDL	0 - 10-3/8	3-15/16	1-1/4	35000	40.1
J12-HDL	0 - 12-1/2	4-1/4	1-1/4	40000	47.8



C-CLAMP FORCING SCREWS


- › Full length forcing screws provide greater versatility with the minimum capacity always being "0".
- › Strongest C-clamp design.
- › Heavy-duty threaded hub provides maximum screw support.
- › Forcing screws have a square head to be turned with a wrench.
- › Forcing screws have a hardened tip.

Product #	Thread Diameter (in)	Overall Length (in)	Weight (lbs)
J1P1-HD	11/25	2-13/16	0.10
J2P2-HD	3/4	5-1/8	0.53
J3P2-HD	7/8	6-7/8	0.99
J4P2-HD	1	8-3/16	1.69
J5P2-HD	1	9-9/16	1.94
J6P2-HD	1-1/8	11-1/2	2.67
J10P2-HD	1-1/4	15-3/4	4.58
J11/2P1-HD	5/8	4	0.30
J12P2-HD	1-1/4	17-5/8	5.12





FORGED EYE BOLTS



Product #	Thread Size (in) (A)	Shank Length (in) (B)	Eye Inner Dia. (in) (C)	Eye Outside Dia. (in) (D)	Overall Length (in) (E)	Center Eye to Shoulder (in) (F)	Rated Capacity (lbs)	Weight (lbs)
J94020	1/4 - 20	1.00	.69 - .81	1.19	2-9/41 - 2-9/17	.69 - .81	500	0.05
J94021	5/16 - 18	1.12	.81 - .94	1.44	2-33/50 - 2-32/33	.88 - 1.00	900	0.10
J94022	3/8 - 16	1.25	.94 - 1.06	1.69	3-1/11 - 3-8/17	1.06 - 1.09	1,300	0.16
J94023	7/16 - 14	1.38	1.00 - 1.12	1.81	3-16/39 - 3-32/41	1.19 - 1.31	1,800	0.24
J94024	1/2 - 13	1.50	1.12 - 1.25	2.12	3-17/21 - 4-4/21	1.31 - 1.44	2,400	0.35
J94025	9/16 - 12	1.75	1.31 - 1.44	2.56	4-14/25 - 4-47/50	1.59 - 1.72	3,200	0.47
J94026	5/8 - 11	1.75	1.31 - 1.44	2.56	4-14/25 - 4-47/50	1.59 - 1.72	4,000	1.00
J94027	3/4 - 10	2.00	1.44 - 1.56	2.81	5 - 5-1/2	1.72 - 1.91	5000	1.00
J94028	7/8 - 9	2.25	1.56 - 1.69	3.19	5-3/4 - 6-4/21	2.03 - 2.22	7,000	1.63
J94029	1 - 8	2.50	1.69 - 1.81	3.56	6 - 6-22/25	2.22 - 2.41	9,000	2.22
J94030	1-1/8 - 7	2.75	1.94 - 2.06	4.06	7-11/25 - 7-3/4	2.59 - 2.78	12,000	3.40
J94031	1-1/4 - 7	3.00	2.12 - 2.25	4.44	8-9/17 - 8-11/25	3.03 - 2.84	15,000	4.44
J94032	1-1/2 - 6	3.50	2.44 - 2.56	5.19	9-9/41 - 9-18/25	3.19 - 3.44	21,000	7.36
J94033	1-3/4 - 5	3.75	2.75 - 3.00	6.00	10-1/2 - 11-3/25	3.88 - 4.12	28,000	11.35
J94034	2 - 4-1/2	4.00	3.06 - 3.44	6.88	11-9/17 - 12-9/41	4.25 - 4.50	38,000	16.70

ASME B18.15

AVIATION SNIPS

- Available in straight, left, or right models.
- Compound leverage multiplies handle pressure and increases control for intricate cutting.
- Serrated blades for maximum grip of the material being cut.
- Color coded vinyl grips.



Product #	Cuts	Handle Color	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
J303L	Left	Red	1-3/8	10	0.94
J303R	Right	Green	1-3/8	10	0.94
J303S	Straight	Yellow	1-3/8	10	0.94

ASME B107.16M

AVIATION SNIPS - OFFSET

- Available in left or right models.
- Compound leverage multiplies handle pressure and increases control.
- Offset handle keeps hands above working area for cutting ease and comfort.
- Serrated blades for maximum grip of the material being cut.



Product #	Cuts	Handle Color	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
J303LS	Left	Red	1-1/4	10	1.00
J303RS	Right	Green	1-1/4	10	1.00

ASME B107.16M



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

orders.proto@sbdinc.com • +1.800.800.TOOL • Fax: +1.800.829.7809 • www.protoindustrial.com

CIRCULAR CUTTING DUCKBILL SNIPS

- › Duckbill snips are designed for circle and odd shaped radius cutting.
- › Plastisol grips for added comfort.

Product #	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
J307	1-1/2	7	0.45
J310	2	10	0.95
J312	2-3/4	12-3/4	1.61



HEAVY-DUTY SNIPS

- › Designed for making straight and moderately irregular cuts.
- › Plastisol grips for added comfort.
- › J334 cuts up to 18 gauge CR steel and 22 gauge SS.

Product #	Description	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
J334	Combination Snips	3-7/8	14	3.02
J336	Bulldog Tinner Snips	2-1/2	16	3.63

ASME B107.16M



STRAIGHT CUTTING SNIPS

- › Designed for all straight cutting including inside and outside corners.
- › Plastisol grips for added comfort.

Product #	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
J317	1-1/2	7	0.48
J320	2	10	0.93
J322	2-3/4	12-3/4	1.64





MINIATURE SNIPS

- › Improved shearing action.
- › Increased length of cut from 1-1/8" to 2".
- › Increased jaw opening.
- › Serrated bottom blade to grip material.
- › Ergonomic handle design.
- › Cuts up to 26 gauge cold-roll sheet metal.
- › Copper wire up to 18 AWG.
- › Soft steel wire up to 22 AWG.

Product #	Blade Length (in)	Overall Length (in) (L)	Weight (lbs)
J308	1-1/8	6-1/2	0.33



MULTI-PURPOSE TOOLS

MULTI-PURPOSE TOOL - NEEDLE NOSE

- › 15 functions including pliers with wire cutter, cross cut saw, taper grind blade, sheepfoot blade, can & bottle opener, ruler, and screwdriver bits provide versatility.
- › Locking handle securely positions and safely locks each blade or implement for safety.
- › Stainless steel construction for heavy-duty use and long life.
- › Nylon belt pouch for convenient storage.
- › Wide handle design for added comfort.

Product #	Overall Length (in) (L)	Weight (lbs)
J18576	6	0.65



MULTI-PURPOSE TOOL - BLUNT NOSE

- › 15 functions including pliers with wire cutter, cross cut saw, taper grind blade, sheepfoot blade, can & bottle opener, ruler, and screwdriver bits provide versatility.
- › Locking handle securely positions and safely locks each blade or implement for safety.
- › Stainless steel construction for heavy-duty use and long life.
- › Nylon belt pouch for convenient storage.
- › Wide handle design for added comfort.

Product #	Overall Length (in) (L)	Weight (lbs)
J18575	5-5/8	0.56



LOCKBACK KNIVES

- › 420 grade high carbon stainless steel blade.
- › Hardwood handle with heavy-duty lock springs.
- › Solid one piece brass bolster and liner provide additional strength.
- › Blade locks in open position to guard against accidental closing.
- › J18545 includes a leather sheath.



Product #	Blade Length (in)	Closed Position Length (in)	Open Position Length (in)	Weight (lbs)
J18543	2-1/4	3	5-1/4	0.16
J18545	3-3/4	4-7/8	8-3/4	0.57
J18545B	3-3/4	4-7/8	8-3/4	0.57

COMMEMORATIVE LOCKBACK KNIFE

- › Commemorative sculptured brass handle.
- › Unique artwork features the Proto® logo on one side, a selection of Proto® tools on the reverse side.



Product #	Blade Length (in)	Closed Position Length (in)	Open Position Length (in)	Weight (lbs)
J18510	2	3	5-1/4	0.16

ELECTRICIAN'S KNIFE WITH STRIPPING BLADE

- › Spear blade.
- › Self-locking combination screwdriver, insulation cutter and wire scraper blade.



Product #	Stripping Blade	Blade Length (in)	Closed Position Length (in)	Open Position Length (in)	Weight (lbs)
J18535	Yes	3	3-3/4	7	0.32
J18500	No	3	3-3/4	7	0.24

PRUNING KNIFE

- › Curved blade for precision cutting and stripping.



Product #	Blade Length (in)	Closed Position Length (in)	Open Position Length (in)	Weight (lbs)
J18505	4	4-3/4	9	0.26