



Circuit Breaker Lockout *Reference Guide*

EZ Panel Loc™

- Works on wide range of breakers, including single- and multi-pole configurations
- Makes use of unique lock rail system, providing the following benefits:
 - Allows panel door to be closed even when lockouts are in place
 - Accommodates multiple locks, facilitating group lockout activity without hasps
 - Keeps weight off the breakers, protecting delicate electrical components from damage
 - Positions locks and tags outside the panel, making sure lockout activity is clearly visible to anyone in the area
- Patent No. 6,727,441

How EZ Panel Loc System Works



① Lockout device is unlocked by inserting and turning the red plastic key.



② Peel liner off bottom of lock rail, exposing super-bond adhesive. Permanently affix to any location on the panel. No drilling required!



③ Attach the lockout device to the breaker and snap into locked position.



④ Pass plastic key through lock rail and attach lock, preventing key from sliding down cable and opening lockout device.



⑤ For group lockouts, run key through multiple loops in lock rail and apply locks. No hasps required!



⑥ Low-profile lockouts allow panel doors to be closed on most breaker panels.

Covers Most 120V – 277V Breakers!

- The EZ Panel Loc™ System includes two types of lockout devices, accommodating an exceptionally wide range of breaker models.

SNAP-ON

For use on Square D NQO and other breakers that have a hole in the switch tongue. Just align pins with hole and snap closed. Pins prevent switch from being thrown.



CLAMP-ON

For use on breakers that do not have a hole in the switch tongue, including multipole breakers with tie-bars. Turn thumbscrew to clamp lockout securely onto switch, then snap the cover closed to prevent thumbwheel from being loosened.



EZ Panel Loc™

“No Shackle” EZ Panel Locks

The EZ Panel Loc system can be used with most padlocks. A shackle-less padlock designed specifically for use with the EZ Panel Loc key is also available. This is especially useful when lockout devices will be kept at the panel in accordance with NEC regulations (see below). Everything you need to lockout breakers is kept conveniently right at the point of need!

“The provisions for locking or adding a lock to the disconnecting means shall be permanently installed on or at the switch or circuit breaker used as the disconnecting means.”
NEC 2002, Article 430.102(B) Motor




Spacing Gasket

For low profile panels, a spacing gasket can be installed, pushing out the panel frame and adding an additional 3/8" of clearance between the panel surface and the door. Self-adhesive backing makes installation quick and easy. Dimensions: 3/8"D, 1"W, 15"L.



Technical Information

- Lockout devices constructed of high-impact Isoplast polymers
- Cables are 2-ft. in length
- Lock rails made of durable isoplast polymers with acrylic adhesive backing
- Lock rails available in 4" or 8" lengths (containing 7 or 15 lock loops)
- Patent No. 6,727,441

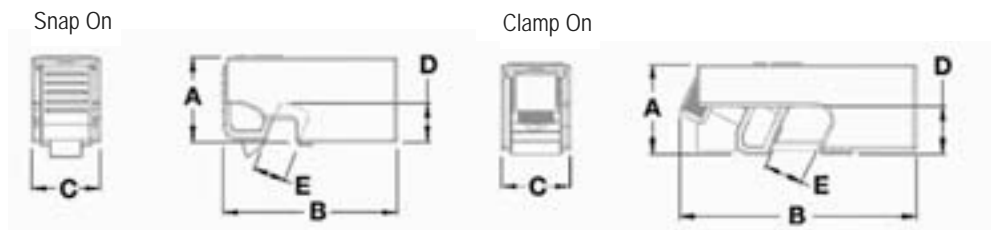

	Outer Dimensions (in.)			Switch Clearance (in.)	
	A	B	C	D	E
Snap-On Style	0.90"	1.88"	0.74"	0.40"	0.35"
Clamp-On Style	0.95"	2.56"	0.74"	0.35"	0.42"

Description	1 Per Pkg	6 Per Pkg
Snap-On Lockout Device	51252	65815
Clamp-On Lockout Device	51254	65810
4" Lock Rail	51256	65814
8" Lock Rail	51258	51260
No-Shackle Lock	51261	51263
Spacing Gasket	89256	NA

120V Snap-On Breaker Lockout



- Designed for 120V breakers that have holes in the switch tongue
- Quick and easy – just snap in place and apply lock!
- Dual cavities accommodate different size switch tongues
- Accepts locks shackles up to 9/32" in diameter
- Dimensions: 0.83"H x 0.35"W x 2.15"L
- Patent No. 5,122,624

Catalog Number	Qty
65387	1/pkg
65688	6/pkg

Clamp-On Breaker Lockouts



The Brady Clamp-On Circuit Breaker Lockout works on an extremely wide range of breakers.

- Extremely versatile – works on wide range of single-pole and internal-trip multi-pole breakers!
- Two sizes, one for 120/277V breakers and one for 480/600V breakers
- Made of rugged polypropylene and impact modified nylon
- Use thumbscrew to clamp lockout securely onto switch tongue, then pull cover over thumbscrew and lock in place to prevent clamp from being loosened
- New blade design provides tighter grip with less torque on thumb screw
- Accepts locks shackles up to 9/32" in diameter
- Patent No. 5,500,495

Catalog No.	Description	Qty
65396	120/277V Clamp-On Breaker Lockout	1/pkg
65965	120/277V Clamp-On Breaker Lockout	6/pkg
65397	480/600V Clamp-On Breaker Lockout	1/pkg
65966	480/600V Clamp-On Breaker Lockout	6/pkg



Step 1

Step 2

Step 3

Cleats for Clamp-On Breaker Lockouts

- Use in conjunction with clamp-on breaker lockouts (sold above)
- Easily clips onto the bottom of the lockout body
- Assures positive restraint for breakers with long, sliding switch throws
- Patent No. 5,500,495
- Standard package: 6 cleats

Catalog No.	Description	Qty
65404	Cleats For 120/277V Lockout	6/pkg
65406	Cleats For 480/600V Lockout	6/pkg

Universal Multi-Pole Breaker Lockout

- Single device works with most major multi-pole breakers that employ a tie-bar
- Made of durable impact-modified nylon
- Compatible with GE, ITE, Sylvania, Challenger, Bryant, Westinghouse, General Switch Co., and more!
- Use thumbscrew to clamp lockout securely over tie bar, then insert lock to prevent clamp from being loosened
- Patent No. 5,300,740

Catalog Number	Qty
66321	1/pkg
66320	6/pkg



Universal Multi-Pole Lockout works with most two or three pole breakers utilizing a tie-bar.

Oversized Breaker Lockout

- Oversized 480/600V frame lockout fits breaker switches up to 2 1/4" wide and 7/8" thick
- Made of durable polypropylene and glass filled-impact-modified nylon
- New blade design gets better grip, works on even more breaker models!
- Patent #5,500,495

Catalog Number	Qty
65329	1/pkg
65321	6/pkg



480-600V Breaker Blocker



- Perfect for locking out oversized and irregularly shaped switches
- Self-adhesive backed rails are permanently installed into an electrical panel – simply clean panel surface and adhere – no drilling required!
- Blocking bars (red and green) are 7 1/2" long
- Red blocking bar indicates locked off, green bar indicates locked on
- Patent No. 6,469,264

Breaker Blocker Kit

Catalog No.	Description
90891	Breaker Block Kit

Kit includes 2 yellow mounting rails, 1 red blocking bar, 1 green blocking bar and 3 alcohol wipes.

Breaker Blocker Components

Catalog No.	Description	Qty
90892	7.6" Red Blocking Bar	5/pack
90893	7.6" Green Blocking Bar	5/pack
51264	4" Yellow Mounting Rails	2/pack
51265	Blocking Bar Holder	5/pack

Miniature Circuit Breaker Lockouts



Tie-Bar



Pin-Out Standard



Pin-In Standard



Pin-Out Wide

- A safe and effective method for locking out miniature circuit breakers, commonly used in European and Asian equipment
- Miniature Breaker Lockouts requires NO TOOLS to install! The Lockout easily installs with the aid of a push button. The Tie Bar Style Lockout has a convenient thumb wheel for quick application.
- Available for single and multi-pole breakers
- Recommended to lock with lightweight Brady Safety padlocks (see page 18) or other padlocks, the lockouts can take padlocks with a shackle diameter up to 9/32"
- Material: Glass-filled nylon
- Available in 1 or 6 packs
- Patent No. 6,844,512

4 Different types:	POS	Pin Out Standard
	PIS	Pin In Standard
	POW	Pin Out Wide
	TBLO	Tie Bar Lockout

Catalog No.	Type	Qty
90844	POS	1
90845	POS	6
90847	PIS	1
90848	PIS	6
90850	POW	1
90851	POW	6
90853	TBLO	1
90854	TBLO	6

Personal Breaker Lockout Pouch



Personal Breaker Lockout Pouch

- Pouch contains 1 each of our most popular circuit breaker lockouts
- Covers 120v/277v and 480/600v breakers in single- and multi-pole configurations.
- Components:
 - 1 120/277V Clamp-On Breaker Lockout w/cleat (65396)
 - 1 480/600V Clamp-On Breaker Lockout w/cleat (65397)
 - 1 Universal Multipole Breaker Lockout (66321)
 - 2 1" Group Lockout Hasps (65375)
 - 2 Heavy Duty Lockout Tags (65520) w/ Nylon Cable Ties
 - 1 Lockout Belt Pouch (51172)

Catalog No.	Description
105966	Personal Breaker Lockout Pouch (Kit)
105967	Kit w/ 2 Keyed-Alike Safety Padlocks
105968	Kit w/ 2 Keyed-Alike Steel Padlocks

Personal Breaker Lockout Kit



Personal Breaker Lockout Kit

- Tool box contains 2 each of our most popular breaker lockouts
- Covers 120v/277v and 480/600v breakers in single- and multi-pole configurations
- Components:
 - 2 120/277V Clamp-On Breaker Lockouts w/ Cleats (65396)
 - 2 480/600V Clamp-On Breaker Lockouts w/ Cleats (65397)
 - 2 Universal Multipole Breaker Lockouts (66321)
 - 3 1" Red Lockout Hasps (65375)
 - 3 Heavy Duty Lockout Tags (65520) w/ Nylon Cable Ties
 - 1 Small Lockout Toolbox (105905)
 - 1 Toolbox (105905)

Catalog No.	Description
105963	Personal Breaker Lockout Kit
105964	Kit w/ 3 Keyed-Alike Safety Padlocks
105965	Kit w/ 3 Keyed-Alike Steel Padlocks

Personal Electrical Lockout Kit

- Provides lockouts for use on most circuit breakers, electrical plugs and disconnect switches.
- Components:
 - 1 Mini Cable Lockout (50940)
 - 1 3-in-1 Plug Lockout (PL023)
 - 2 120/277V Clamp-On Breaker Lockouts w/ Cleats (65396)
 - 1 480/600V Clamp-On Breaker Lockout w/ Cleat (65397)
 - 2 Universal Multipole Breaker Lockout (66321)
 - 1 Oversized Breaker Lockout (65329)
 - 3 1" Group Lockout Hasps (65375)
 - 3 Heavy Duty Lockout Tags (65520) w/ Nylon Cable Ties
 - 1 Medium Lockout Toolbox (105906)



Catalog No.	Description
105960	Personal Electrical Lockout Kit
105961	Kit w/3 Keyed-alike Safety Padlocks
105962	Kit w/3 Keyed-alike Steel Padlocks

For more information on Brady Safety padlocks, see page 15.

Circuit Breaker Lockout Cross Reference Guide

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts				
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SOD QO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar	
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853	
Airpax	Airpax	1		X*										
Allen Bradley	1492-CB1F	1							X					
Allen Bradley	1492-CB2F	2							X					
Allen Bradley	1492-CB3F	3							X					
Allen Bradley	1492-CB1G	1							X					
Allen Bradley	1492-CB2G	2							X					
Allen Bradley	1492-CB3G	3							X					
Allen Bradley	1492-CB1H	1							X					
Allen Bradley	1492-CB2H	2							X					
Allen Bradley	1492-CB3H	3							X					
Allen Bradley	1492-CB1DF	1							X					
Allen Bradley	1492-CB1DG	1							X					
Allen Bradley	1492-CB1DH	1							X					
Allen Bradley	1492-CB2DF	2							X					
Allen Bradley	1492-CB2DG	2							X					
Allen Bradley	1492-CB2DH	2							X					
ABB	JS	2-3			X**									
ABB	S1	3		X										
ABB	S3	3			X**									
ABB	F362	2							X					
ABB	F364	4							X					
ABB	F374	4							X					
ABB	E221	1							X					
ABB	E222	2							X					
ABB	E241	1							X					
ABB	E271	1							X					
ABB	E242	2							X					
ABB	E272	2							X					
ABB	E243	3							X					
ABB	E273	3							X					
ABB	E244	4							X					
ABB	E274	4							X					
ABB	S201-B	1							X					
ABB	S202-B	2							X					
ABB	S203-B	3							X					
ABB	S204-B	4							X					
ABB	S201-C	1							X					
ABB	S202-C	2							X					
ABB	S203-C	3							X					
ABB	S204-C	4							X					
ABB	S201-D	1							X					
ABB	S202-D	2							X					
ABB	S203-D	3							X					
ABB	S201-K	1							X					
ABB	S202-K	2							X					
ABB	S203-K	3							X					
ABB	S204-K	4							X					
ABB	S201P-K	1							X					
ABB	S202P-K	2							X					
ABB	S203P-K	3							X					
ABB	S222-K	4							X					
ABB	S221	1							X					
ABB	S222	2							X					
ABB	S223	3							X					
ABB	S224	4							X					
ABB	S251	1							X					
ABB	S252	2							X					
ABB	S253	3							X					
ABB	S261-B	1							X					
ABB	S262-B	2							X					
ABB	S263-B	3							X					
ABB	S264-B	4							X					
ABB	S261-C	1							X					
ABB	S262-C	2							X					
ABB	S263-C	3							X					
ABB	S264-C	4							X					
ABB	S261-D	1							X					
ABB	S262-D	2							X					
ABB	S263-D	3							X					
ABB	S271-K	1							X					
ABB	S272-K	2							X					
ABB	S273-K	3							X					
ABB	S274-K	4							X					
ABB	S281-K	1							X					
ABB	S282-K	2							X					
ABB	S283-K	3							X					
ABB	S281UC-K	1							X					
ABB	S282UC-K	2							X					
ABB	S283UC-K	3							X					
ABB	S201P-Z	1							X					
ABB	S202P-Z	2							X					
ABB	S203P-Z	3							X					
ABB	S201U-K	1							X					

X Denotes Compatibility

Don't see your circuit breaker? Call us at 888-272-3946

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts			
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SOD QO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853
ABB	S202U-K	2								X			
ABB	S203U-K	3								X			
ABB	S204U-K	4								X			
ABB	S201UP-K	1								X			
ABB	S202UP-K	2								X			
ABB	S203UP-K	3								X			
ABB	S204UP-K	4								X			
ABB	S201U-Z	1								X			
ABB	S202U-Z	2								X			
ABB	S203U-Z	3								X			
ABB	S204U-Z	4								X			
ABB	S201UP-Z	1								X			
ABB	S202UP-Z	2								X			
ABB	S203UP-Z	3								X			
ABB	S204UP-Z	4								X			
ABB	F202AC	2								X			
ABB	F672	2								X			
ABB	F204AC	4								X			
ABB	F674	4								X			
ABB	S281-Z	1								X			
ABB	S282-Z	2								X			
ABB	S283-Z	3								X			
ABB	S281UC-Z	1								X			
ABB	S282UC-Z	2								X			
ABB	S283UC-Z	3								X			
ABB	S501-B	1										X	
ABB	S502-B	2										X	
ABB	S503-B	3										X	
ABB	S501-C	1										X	
ABB	S502-C	2										X	
ABB	S503-C	3										X	
ABB	S501-D	1										X	
ABB	S502-D	2										X	
ABB	S503-D	3										X	
ABB	S501-K	1										X	
ABB	S502-K	2										X	
ABB	S503-K	3										X	
ABB	S501UC-B	1										X	
ABB	S502UC-B	2										X	
ABB	S503UC-B	3										X	
ABB	S504UC-B	4										X	
ABB	S501UC-K	1										X	
ABB	S502UC-K	2										X	
ABB	S503UC-K	3										X	
ABB	S504UC-K	4										X	
American Ckt. Bkr.	NEF	3		X*									
American Ckt. Bkr.	NJJ	3			X**	X							
AEG	E82S	2								X			
American Switch	C	1		X				X	X				
Bryant	BR	1	X	X					X				
Bryant	BR	2-3				X			X				
Buschmat	S46	1								X			
Challenger	C	1	X	X					X				
Challenger	C	2-3				X			X				
Challenger	CDK	2-3			X								
Challenger	LM	1		X					X				
Challenger	NEJ	1-2		X*					X				
Clipsal	4CB	1-3								X			
Crouse Hinds	MP	2				X			X				
Cutler Hammer	BA	1		X					X				
Cutler-Hammer	BAB	1	X	X					X				
Cutler-Hammer	BAB	2-3				X							
Cutler-Hammer	BD	1	X	X					X				
Cutler-Hammer	BR	1	X	X					X				
Cutler-Hammer	BR	2-3				X			X				
Cutler-Hammer	BRH	1	X	X					X				
Cutler-Hammer	BRH	2-3				X			X				
Cutler-Hammer	BRHH	2				X			X				
Cutler-Hammer	CC	3		X*									
Cutler-Hammer	CH	1	X	X				X	X				
Cutler-Hammer	CH	2-3				X			X				
Cutler-Hammer	CHH	3		X*									
Cutler-Hammer	CH2	4				X			X				
Cutler-Hammer	CHB	1	X	X				X	X				
Cutler-Hammer	CHB	2-3				X			X				
Cutler-Hammer	CHKD	2-3			X								
Cutler-Hammer	CHLD	2-4				X							
Cutler-Hammer	CHMDL	2-3				X							
Cutler-Hammer	CHND	2-4			X**								
Cutler-Hammer	CHP	1	X	X				X	X				
Cutler-Hammer	CHP	2-3				X			X				
Cutler-Hammer	CHQ	1						X	X				
Cutler-Hammer	CHQ	2				X			X				
Cutler-Hammer	CHSW	2-3				X			X				

X Denotes Compatibility

* - Cleat (65404) accessory required see page 4
 ** - Cleat (65406) accessory required see page 4

Circuit Breaker Lockout Cross Reference Guide

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts						
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SQD QO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar			
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853			
Cutler-Hammer	CKD	2-3			X											
Cutler-Hammer	CL	1	X	X				X	X							
Cutler-Hammer	CL	2					X		X							
Cutler-Hammer	CLD	2-4				X										
Cutler-Hammer	CLDC	2-4				X										
Cutler-Hammer	CMDL	2-3				X										
Cutler-Hammer	CND	2-4			X**											
Cutler-Hammer	CNDC	2-4			X**											
Cutler-Hammer	CSR	1		X					X							
Cutler-Hammer	DK	2-3			X											
Cutler-Hammer	E125B	1-4		X					X							
Cutler-Hammer	E125E	1-4		X					X							
Cutler-Hammer	E125H	1-4		X					X							
Cutler-Hammer	E125S	1-4		X					X							
Cutler-Hammer	ED	2-4		X					X							
Cutler-Hammer	EDC	2-4		X					X							
Cutler-Hammer	EDH	2-4		X					X							
Cutler-Hammer	EFH	1-4		X					X							
Cutler-Hammer	EGB	1-4		X					X							
Cutler-Hammer	EGE	1-4		X					X							
Cutler-Hammer	EGS	1-4		X					X							
Cutler-Hammer	EHC	1-4		X					X							
Cutler-Hammer	EHD	1-4		X					X							
Cutler-Hammer	FB	2-3		X					X							
Cutler-Hammer	FC	1-4		X					X							
Cutler-Hammer	FD	1-4		X					X							
Cutler-Hammer	FDB	2-4		X					X							
Cutler-Hammer	FDC	2-4		X					X							
Cutler-Hammer	FS	2-3		X					X							
Cutler-Hammer	GB	1-3		X					X							
Cutler-Hammer	GC	1-3		X					X							
Cutler-Hammer	GD	1-3		X					X							
Cutler-Hammer	GDB	1-3		X					X							
Cutler-Hammer	GHB	1-3		X					X							
Cutler-Hammer	GHBGFEP	1		X					X							
Cutler-Hammer	GHC	1-3		X					X							
Cutler-Hammer	GHCGFEP	1		X					X							
Cutler-Hammer	HBAW	1	X	X					X							
Cutler-Hammer	HBAW	2-3					X									
Cutler-Hammer	HBAX	1	X	X					X							
Cutler-Hammer	HBAX	2-3					X									
Cutler-Hammer	HFD	1-4		X					X							
Cutler-Hammer	HGHB	1		X					X							
Cutler-Hammer	HGHC	1		X					X							
Cutler-Hammer	HJD	2-4			X											
Cutler-Hammer	HKD	2-4			X											
Cutler-Hammer	HLD	2-4				X										
Cutler-Hammer	HMCP	2-3		X	X											
Cutler-Hammer	HMDL	2-3				X										
Cutler-Hammer	HMDLB	2-3				X										
Cutler-Hammer	HMPL	3			X**	X										
Cutler-Hammer	HND	2-4			X**											
Cutler-Hammer	HQP	1	X	X					X							
Cutler-Hammer	HQP	2						X								
Cutler-Hammer	JD	2-4			X											
Cutler-Hammer	JDB	2-3			X											
Cutler-Hammer	JDC	2-4			X											
Cutler-Hammer	KD	2-4			X											
Cutler-Hammer	KDB	2-4			X											
Cutler-Hammer	KDC	2-4			X											
Cutler-Hammer	LA	2-3			X											
Cutler-Hammer	LD	2-4				X										
Cutler-Hammer	LDB	2-3				X										
Cutler-Hammer	LDC	2-4				X										
Cutler-Hammer	LH	3			X											
Cutler-Hammer	LHB	3			X											
Cutler-Hammer	LJ	3							X							
Cutler-Hammer	MA	2-3			X**											
Cutler-Hammer	MC	2-3			X**											
Cutler-Hammer	MD	2-3				X										
Cutler-Hammer	MDL	2-3				X										
Cutler-Hammer	MDS	2-3				X										
Cutler-Hammer	NB	2-3				X										
Cutler-Hammer	ND	2-4			X**											
Cutler-Hammer	NDC	2-4			X**											
Cutler-Hammer	OPTIM	3			X**											
Cutler-Hammer	PB	2-3				X										
Cutler-Hammer	QBGF	1		X												
Cutler-Hammer	QBGF	2							X							
Cutler-Hammer	QBGFEP	1		X												
Cutler-Hammer	QBGFEP	2							X							
Cutler-Hammer	QBHGF	1		X												
Cutler-Hammer	QBHGFEP	1		X												

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts			
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SQD QO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853
Cutler-Hammer	QBHW	1	X	X				X					
Cutler-Hammer	QBHW	2-3					X						
Cutler-Hammer	QC	1	X	X				X					
Cutler-Hammer	QC	2-3					X	X					
Cutler-Hammer	QCD	1	X	X				X					
Cutler-Hammer	QCD	2-3					X	X					
Cutler-Hammer	QCGF	1		X									
Cutler-Hammer	QCGFEP	1		X									
Cutler-Hammer	QCHGF	1		X									
Cutler-Hammer	QCHGFEP	1		X									
Cutler-Hammer	QCHW	1	X	X				X					
Cutler-Hammer	QCHW	2-3					X	X					
Cutler-Hammer	QHCW	1	X	X				X					
Cutler-Hammer	QHCW	2-3					X	X					
Cutler-Hammer	QHCX	1	X	X				X					
Cutler-Hammer	QHCX	2-3					X	X					
Cutler-Hammer	QHPW	1	X	X				X					
Cutler-Hammer	QHPW	2-3					X						
Cutler-Hammer	QHPX	1	X	X				X					
Cutler-Hammer	QHPX	2-3					X						
Cutler-Hammer	QPGF	1		X									
Cutler-Hammer	QPGF	2						X					
Cutler-Hammer	QPGFEP	1		X									
Cutler-Hammer	QPGFEP	2						X					
Cutler-Hammer	QPHGF	1		X									
Cutler-Hammer	QPHGFEP	1		X									
Cutler-Hammer	QPHW	1	X	X				X					
Cutler-Hammer	QPHW	2-3					X						
Cutler-Hammer	WME	1-3							X				
Cutler-Hammer	WMF	1-3							X				
Cutler-Hammer	WMH	1-4							X				
Cutler-Hammer	WMM	1-4							X				
Cutler-Hammer	WMN	1-4							X				
Cutler-Hammer	WMS	1-4							X				
E-T-A	911220G	2							X				
E-T-A	911225	1								X			
FAZ	C16	1-4							X				
Fed. Pacific Elec.	2B	2											
Fed. Pacific Elec.	BAB	1		X				X					
Fed. Pacific Elec.	NA-single	3			X**			X					
Fed. Pacific Elec.	NA-tie bar	2						X					
Fed. Pacific Elec.	NB	1		X*				X					
Fed. Pacific Elec.	NBH GF1	1		X				X					
Fed. Pacific Elec.	NE/NEF	1-3		X*									
Fed. Pacific Elec.	NEJ	1-3		X*									
Fed. Pacific Elec.	NFJ	1-3		X									
Fed. Pacific Elec.	NJJ	1-3			X								
Fed. Pacific Elec.	NJL	1-3			X								
Fed. Pacific Elec.	NM	1-3			X								
Fed. Pacific Elec.	NP-single	1		X				X					
Frank Adams	P	1		X				X					
FUJI Electric	EA53B	3		X*									
FUJI Electric	EA203B	3		X*									
FUJI Electric	BU-ESB	3		X*									
FUJI Electric	BU-ESA	3		X*									
FUJI Electric	BU-FSB	3		X*									
General Electric	V	1-3								X			
General Electric	EH400	3			X								
General Electric	HQC	3		X				X					
General Electric	SED	2-3		X				X					
General Electric	SEH	2-3		X				X					
General Electric	SEL	2-3		X				X					
General Electric	SEP	2-3		X				X					
General Electric	SFH	2-3		X				X					
General Electric	SFL	2-3		X				X					
General Electric	SFP	2-3		X				X					
General Electric	SGD	2-3			X								
General Electric	SGH	2-3			X								
General Electric	SGL	2-3			X								
General Electric	SGLA	2-3			X								
General Electric	SGP	2-3			X								
General Electric	SRPG	3			X								
General Electric	TB	2		X*				X					
General Electric	TBC	2		X*				X					
General Electric	TE	1-3		X*				X					
General Electric	TEB	1-3		X*				X					
General Electric	TED	1-3		X*				X					
General Electric	TEF	1-3		X*				X					
General Electric	TEL	3		X*				X					
General Electric	TEML	3		X*				X					
General Electric	TEY	1-3		X				X					
General Electric	TF	1-3		X				X					
General Electric	TFC	3		X*				X					
General Electric	TFJ	2-3			X								

X Denotes Compatibility

* - Cleat (65404) accessory required see page 4
 ** - Cleat (65406) accessory required see page 4

Circuit Breaker Lockout Cross Reference Guide

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts			
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SOD QO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853
General Electric	TFK	2-3			X								
General Electric	TFL	3			X								
General Electric	THED	1-3		X*				X					
General Electric	THEF	1-3		X*				X					
General Electric	THFK	2-3			X								
General Electric	THHQB	2-3					X	X					
General Electric	THHQB-A	1	X	X				X					
General Electric	THHQB-S	1		X				X					
General Electric	THHQC	1-3					X	X					
General Electric	THHQC-A	1	X	X				X					
General Electric	THHQC-S	1		X				X					
General Electric	THHQL	2-3					X	X					
General Electric	THHQL-A	1	X	X				X					
General Electric	THHQL-S	1		X				X					
General Electric	THJK4	2-3			X**								
General Electric	THJK6	2-3			X**								
General Electric	THKM12	2-3				X							
General Electric	THKM8	2-3				X							
General Electric	THLC1	3		X*									
General Electric	THOB	2-3					X	X					
General Electric	THOB GF	1-2											
General Electric	THOB-A	1	X	X				X					
General Electric	THOB-S	1		X				X					
General Electric	THOC	2-3					X	X					
General Electric	THOC-A	1	X	X				X					
General Electric	THOC-AL	2-3					X	X					
General Electric	THOC-S	1		X				X					
General Electric	THOD	2-3		X*				X					
General Electric	THODBL	3						X					
General Electric	THOL	2-3					X	X					
General Electric	THOL-A	1	X	X				X					
General Electric	THOL-S	1		X				X					
General Electric	TJ2	2-3			X**	X							
General Electric	TJ4	3			X								
General Electric	TJC	2-3		X*				X					
General Electric	TJD	2-3			X**								
General Electric	TJJ	2-3			X**								
General Electric	TJK	2-3			X**								
General Electric	TJS	2-3			X**								
General Electric	TK4V	3			X								
General Electric	TKC	3		X*				X					
General Electric	TKM	2-3				X							
General Electric	TKMA8	3				X							
General Electric	TOB	2-3					X	X					
General Electric	TOB-A	1	X	X				X					
General Electric	TOB-S	1		X				X					
General Electric	TOC	2-3					X	X					
General Electric	TOC-A	1	X	X				X					
General Electric	TQC-S	1		X				X					
General Electric	TOD	2-3		X									
General Electric	TQL	1-3											
General Electric	TQL	2-3											
General Electric	TQL-A	1	X	X				X					
General Electric	TQL-S	1		X				X					
General Electric	V	1-4								X			
GE Vynckier	Series E	1-4								X			
GE Vynckier	Series G	1-3								X			
Hager	453717	3						X					
Hager	MW216A	2						X					
Hager	MW620A	4						X					
Heinemann	LB	1		X*									
Heinemann	LF	1		X*									
Heinemann	LJ	1		X*									
Kapp	LS68	1								X			
Legrand	04302	2								X			
Legrand	06469	3								X			
Legrand	01908	1						X					
Legrand	01935	2										X	
Legrand	01980	3-4										X	
Lemag	SD62	1		X									
Merlin Gerin	B100A	2									X		X
Merlin Gerin	C32N	1-3						X					
Merlin Gerin	C45AD	3						X					
Merlin Gerin	C60a	1-4						X					
Merlin Gerin	C60H	1-4						X					
Merlin Gerin	C60N	1-4						X					
Merlin Gerin	C80A	3									X		X
Merlin Gerin	NC100H	1-3									X		
Merlin Gerin	NC125H	1-3									X		
Merlin Gerin	NC100L	1-4									X		
Merlin Gerin	NC100LH	1-4									X		
Merlin Gerin	NC100L MA	3									X		
Merlin Gerin	NC100N	1-4									X		
Merlin Gerin	C801N	3				X							

Don't see your circuit breaker? Call us at 888-272-3946

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts			
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SQD QO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853
Merlin Gerin	C1251N	3				X							
Merlin Gerin	CE104N	3		X*									
Merlin Gerin	CK1200NA	3				X							
Merlin Gerin	CJ	3			X**								
Proteus	BSEN60947-3	2					X						
Proteus	AC22BS5419	2					X						
Proteus	C16	1							X				
Proteus	C6	1-3							X				
Siemens ITE	5SX11	1									X		
Siemens ITE	5SX12	2										X	
Siemens ITE	5SX13	3											X
Siemens ITE	5SX21	1									X		
Siemens ITE	5SQ11	1									X		
Siemens ITE	5SQ12	2											X
Siemens ITE	5SQ13	3											X
Siemens ITE	5SQ16	4											X
Siemens ITE	5SN22	2											X
Siemens ITE	BL	1	X	X				X	X				
Siemens ITE	BL	2-3					X		X				
Siemens ITE	BLF-GF1	2					X		X				
Siemens ITE	BLH	1	X	X					X				
Siemens ITE	BLH	2-3					X		X				
Siemens ITE	BQ	1	X	X					X				
Siemens ITE	BQ	2-3					X		X				
Siemens ITE	BQCH	1-3		X					X				
Siemens ITE	BQD	1-3		X					X				
Siemens ITE	BQH	1	X	X					X				
Siemens ITE	BOH	2-3					X		X				
Siemens ITE	CED6	2-3		X					X				
Siemens ITE	CFD6	2-3			X**								
Siemens ITE	CFD6-ETI	2-3			X**								
Siemens ITE	CJ3				X								
Siemens ITE	CJD6	2-3			X								
Siemens ITE	CJD6-ETI	2-3			X								
Siemens ITE	CLF	2			X								
Siemens ITE	CMD6	3				X							
Siemens ITE	CMD6-ETI	3				X							
Siemens ITE	CND6	3				X							
Siemens ITE	CPD6	3				X							
Siemens ITE	COD	1-3		X*					X				
Siemens ITE	E2	1-3		X					X				
Siemens ITE	E4	1-3		X					X				
Siemens ITE	ED	1-3		X					X				
Siemens ITE	ED4	1-3		X					X				
Siemens ITE	ED6	1-3		X					X				
Siemens ITE	ED6-ETI	3		X					X				
Siemens ITE	EE3	3		X*					X				
Siemens ITE	EH3	3		X*					X				
Siemens ITE	EQP	4					X		X				
Siemens ITE	EQT QF	3											
Siemens ITE	ET	3		X*					X				
Siemens ITE	FD6A	2-3			X**								
Siemens ITE	FJ2-B	2-3		X*	X**								
Siemens ITE	FJ3	2			X								
Siemens ITE	FJ6	2			X**								
Siemens ITE	FXD6A	2-3			X**								
Siemens ITE	FXD6-ETI	2-3			X**								
Siemens ITE	GF	1		X					X				
Siemens ITE	HBL	1	X	X					X				
Siemens ITE	HBL	2-3					X		X				
Siemens ITE	HBQ	1	X	X					X				
Siemens ITE	HBQ	2-3					X		X				
Siemens ITE	HE4	1-3		X					X				
Siemens ITE	HED4	1-3		X					X				
Siemens ITE	HED6	2-3		X					X				
Siemens ITE	HFD6	2-3			X**								
Siemens ITE	HFXD6	2-3			X**								
Siemens ITE	HHED6	2-3		X					X				
Siemens ITE	HHFD6	2-3			X**								
Siemens ITE	HHJD6	2-3			X								
Siemens ITE	HHJXD6	2-3			X								
Siemens ITE	HJD6	2-3			X								
Siemens ITE	HJXD6	2-3			X								
Siemens ITE	HMD6	2-3				X							
Siemens ITE	HMXD6	2-3				X							
Siemens ITE	HN3	2				X							
Siemens ITE	HND6	2-3				X							
Siemens ITE	HNXD6	2-3				X							
Siemens ITE	HPD6	3				X							
Siemens ITE	HPXD6	3				X							
Siemens ITE	HQJ2-H	3		X					X				
Siemens ITE	HQP	1	X	X					X				
Siemens ITE	HQP	2-3					X		X				
Siemens ITE	HQPP	1	X	X					X				

X Denotes Compatibility

* - Cleat (65404) accessory required see page 4
 ** - Cleat (65406) accessory required see page 4

Circuit Breaker Lockout Cross Reference Guide

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts			
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SQD QO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853
Siemens ITE	HQPP	2-3					X		X				
Siemens ITE	HOPPH	2					X		X				
Siemens ITE	HRD6	3				X							
Siemens ITE	HRXD6	3				X							
Siemens ITE	JD2	3				X							
Siemens ITE	JD6-A	2-3			X								
Siemens ITE	JJ3				X								
Siemens ITE	JJ6	3				X							
Siemens ITE	JL3	3			X								
Siemens ITE	JXD2-A	2-3			X								
Siemens ITE	JXD6-A	2-3				X							
Siemens ITE	KM3	3				X							
Siemens ITE	LL3	3			X								
Siemens ITE	LL6	3				X							
Siemens ITE	LXD6-ETI	3				X							
Siemens ITE	MD6	2-3				X							
Siemens ITE	MXD6	2-3				X							
Siemens ITE	MXD6-ETI	2-3				X							
Siemens ITE	ND6	2-3				X							
Siemens ITE	NH3-F800												
Siemens ITE	NXD6	2-3				X							
Siemens ITE	PD6	3				X							
Siemens ITE	PXD6	3				X							
Siemens ITE	QJ2	2-3		X*					X				
Siemens ITE	QJ2-H	2-3		X*					X				
Siemens ITE	QJH2	2-3		X*					X				
Siemens ITE	QP	1	X	X					X				
Siemens ITE	QP	2-3					X		X				
Siemens ITE	QP1	1		X					X				
Siemens ITE	QPH	1	X	X					X				
Siemens ITE	QPH	2-4					X		X				
Siemens ITE	QPP	1	X	X					X				
Siemens ITE	QPP	2-3					X		X				
Siemens ITE	OPPH	1	X	X					X				
Siemens ITE	OPPH	2-3					X		X				
Siemens ITE	RD6	3				X							
Siemens ITE	RXD6	3				X							
Siemens ITE	SCMD6	3				X							
Siemens ITE	SCND6	3				X							
Siemens ITE	SHLD6-A	3				X							
Siemens ITE	SHMD6	3				X							
Siemens ITE	SHND6	3				X							
Siemens ITE	SMD6	3				X							
Siemens ITE	SND6	3				X							
Siemens ITE	SHPD6	3				X							
Siemens ITE	SPD6	3				X							
Siemens ITE	3VF3	3		X									
Siemens ITE	NX	3			X**								
Square D	EDB	1-3		X					X				
Square D	EGB	1-3		X					X				
Square D	EH4	1-3		X					X				
Square D	EHB	1-3		X					X				
Square D	EHB	2-3					X		X				
Square D	EJB	1-3		X					X				
Square D	EZ	3				X							
Square D	FA	1-3		X*									
Square D	FAL	1-3		X*									
Square D	FC	3		X*									
Square D	FCL	2-3		X*									
Square D	FDA			X					X				
Square D	FGA	3							X				
Square D	FH	1-3		X*									
Square D	FHL	1-3		X*									
Square D	FHL-DC	3		X*									
Square D	FHP	3		X*									
Square D	FI	3		X*									
Square D	FIL	3		X*									
Square D	FY	1		X*									
Square D	GJL	3		X*									
Square D	KA	2-3		X*									
Square D	KAL	2-3		X*									
Square D	KAP				X								
Square D	KC	2-3		X*									
Square D	KCL	2-3		X*									
Square D	KH	2-3		X*									
Square D	KHL	3		X*									
Square D	KI	2-3		X*									
Square D	KIL	2-3		X*									
Square D	LA	2-3			X**								
Square D	LAL	2-3			X**	X							
Square D	LAP	3			X**	X							
Square D	LC	3				X							
Square D	LCP	3				X							
Square D	LH	2-3			X**								

Don't see your circuit breaker? Call us at 888-272-3946

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts				
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SQD QO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar	
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853	
Square D	LHL	3			X**	X								
Square D	LHP				X**	X								
Square D	L2	3				X								
Square D	LXL	3				X								
Square D	MA	2-3			X**									
Square D	MA	3				X								
Square D	MAL	3				X								
Square D	MH	2-3				X								
Square D	MH	2-3			X**									
Square D	MHL	2-3				X								
Square D	ML-1	3			X**									
Square D	ML-3	3				X								
Square D	MXL	3				X								
Square D	Q1B	2-3		X					X					
Square D	Q1L	2-3		X					X					
Square D	Q2	2-3		X*										
Square D	Q2H	2-3		X*										
Square D	Q2L	2-3		X*										
Square D	Q2MT	2-3		X*										
Square D	Q4	2-3			X**									
Square D	Q4L	2-3			X**									
Square D	QO	1						X						
Square D	QO	2-3	X	X				X	X					
Square D	QOB	1						X						
Square D	QOB	2-3	X	X				X	X					
Square D	QOB-H	2						X						
Square D	QOB-VH	1	X	X				X						
Square D	QOB-VH	2-3					X							
Square D	QO-H	2						X						
Square D	QOM1-VH	2		X						X				
Square D	QOM2-VH	2		X						X				
Square D	QO-SWN	2-3	X	X				X	X					
Square D	QOU	1						X						
Square D	QOU	2-3		X				X	X					
Square D	QOU w/tie bar	2-3					X		X					
Square D	QO-VH	1						X						
Square D	QO-VH	2-3	X	X				X	X					
Square D	QYU	1						X						
Square D	Y1				X									
Sursum	EA53	3										X		
Sylvania GTE	QC	2					X		X					
Sylvania GTE	Type C	2					X		X					
Thomas & Betts	F Frame	1-3		X					X					
Toshiba	E225B	3		X*										
Westinghouse	BA w/tie bar	2-3					X							
Westinghouse	BA	1-3	X	X					X					
Westinghouse	BAB	1-3	X	X					X					
Westinghouse	BR	1-3	X	X					X					
Westinghouse	BR w/tie bar	2-3					X		X					
Westinghouse	BRH w/tie bar	2-3					X							
Westinghouse	CA			X*										
Westinghouse	DA				X									
Westinghouse	DK				X									
Westinghouse	EB	1-3		X*					X					
Westinghouse	ED			X					X					
Westinghouse	EH	1-3		X					X					
Westinghouse	EHB	1-3		X*										
Westinghouse	EHD	1-3		X					X					
Westinghouse	FA	3		X*					X					
Westinghouse	FB	2-3		X*					X					
Westinghouse	FD	1-4		X					X					
Westinghouse	FDB	2-4		X					X					
Westinghouse	FDC	2-4		X					X					
Westinghouse	FP	3			X**									
Westinghouse	GB	1-3		X					X					
Westinghouse	GBH	1-3		X					X					
Westinghouse	GHB	1-3		X					X					
Westinghouse	GR	3			X									
Westinghouse	HBAW	1	X	X					X					
Westinghouse	HBAX	1	X	X					X					
Westinghouse	HCA	3		X*					X					
Westinghouse	HFB	1-3		X*					X					
Westinghouse	HFD	1-4		X					X					
Westinghouse	HKD	3			X									
Westinghouse	HLA				X									
Westinghouse	HLB				X									
Westinghouse	HMC				X									
Westinghouse	HMCP			X*					X					
Westinghouse	HNC					X								
Westinghouse	HQNP	3		X					X					
Westinghouse	HQP	1	X	X					X					
Westinghouse	JA				X									
Westinghouse	JB	3			X									
Westinghouse	JD	2-4			X									

X Denotes Compatibility

* - Cleat (65404) accessory required see page 4
 ** - Cleat (65406) accessory required see page 4

Circuit Breaker Manufacturer	Breaker Type	# of Poles	Standard Breaker Lockouts					EZ Panel Loc™		Mini Circuit Breaker Lockouts			
			120V Snap On (w/ hole)	120/277V Clamp On (no hole)	480/600V Clamp On (no hole)	Oversize 480/600V	Universal Multi-pole (tie bar)	Snap On (SOD OO)	Clamp On (Universal)	Pin Out Standard	Pin In Standard	Pin Out Wide	Multi-pole w/ Tie Bar
			65387	65396	65397	65329	66321	51252	51254	90844	90847	90850	90853
Westinghouse	JDB	3			X								
Westinghouse	KA	3			X**								
Westinghouse	KB				X								
Westinghouse	LA	3			X**								
Westinghouse	LB				X								
Westinghouse	LBB	3			X								
Westinghouse	LH				X								
Westinghouse	MA	2-3			X**								
Westinghouse	MC	2-3			X**								
Westinghouse	MCC	2-3			X**								
Westinghouse	MCPO	3		X*					X				
Westinghouse	NB					X							
Westinghouse	P	3		X					X				
Westinghouse	PA	3											
Westinghouse	QBHW	1	X	X					X				
Westinghouse	QC	1	X	X					X				
Westinghouse	QC	3					X						
Westinghouse	OCHO	1	X	X					X				
Westinghouse	OHCW	1	X	X					X				
Westinghouse	OHCX	1	X	X					X				
Westinghouse	QHPW	1	X	X					X				
Westinghouse	OPHW	1	X	X					X				
Westinghouse	Quicklag P			X					X				
Westinghouse	RE			X					X				
Westinghouse	RH	3			X								
Westinghouse	WPHX	1	X	X					X				
Wylex	WRS40/2	2								X			
Zinsco	HQB	3		X					X				
Zinsco	OB	1		X					X				

The Ultimate Lockout Lock!

The Brady Safety Padlock complies with all OSHA requirements and is a safer alternative to metal locks for lockout applications. The body is nonconductive, while the unique key cylinder prevents electricity from traveling from the shackle to the key, further protecting workers from shock.

The Brady Safety Padlock also delivers superior corrosion resistance. Third-party tests confirm that Brady outperforms the leading competitor when subjected to repeated salt water sprays.



Features & Benefits

- Compact and lightweight
- One-piece “seamless” body construction for rugged durability
- Special 6-pin cylinder resists tampering and offers more unique key cuts
- Key-retaining safety feature prevents key from being removed until shackle is securely closed.
- Ribbed sides for secure gripping, even when wearing gloves
- “Danger” and “Property Of” labels provided in English, Spanish and French
- Locks come keyed different or in keyed-alike sets. Custom keying and charting also available
- Lock bodies can be custom laser engraved upon request.
- Available in 8 high-visibility colors
- Sold individually and in 6-packs

Product Specifications

- Fiberglass reinforced nylon body for extra impact resistance
- Triple-coated hardened steel shackle resists corrosion
- Reserved paracentric keyway provides optimal security
- Service temperature: 0° - 250° F (-20° - 120° C)
- Lock body dimensions: 1 3/4”H x 1 1/2”W x 4/5”D
- Shackle clearance: 1 1/2”; shackle diameter: 1/4”

Brady Safety Padlocks

Color	1 Padlock/Package Catalog No.	6 Padlocks/Package Catalog No.
Red	99552	51339
Blue	99556	51344
Green	99564	51345
Yellow	99570	51346
Orange	99576	51347
Black	99580	51353
Brown	103033	101956
Purple	104919	104916

Brady Keyed Alike Safety Padlocks

3 Padlock/Package Catalog No.	6 Padlocks/Package Catalog No.	Color
105886	105890	Red
105887	105891	Blue
105889	105893	Green
105888	105892	Yellow

Keyed Alike Safety Padlock Sets

When keyed alike, all locks in a set can be opened with the same key.

This option is beneficial when multiple locks are assigned to a single employee.

Part numbers are to the right

Specify Brady...

The world leader in Lockout / Tagout

Brady offers the most extensive line of products to make your hazardous energy control program more safe and efficient. Not only do our innovative products and services ensure OSHA compliance, they also reduce costs by avoiding accidents and injuries, and increase productivity by safely speeding up lockout procedures and reducing downtime.

Brady offers a variety of cost effective solutions for enhancing all aspects of your energy control program, including:

- Documented Procedures and Policies
- Energy Source Identification
- Employee Training
- Lockout Devices
- Lockout Kits and Stations



For more information about our full line of Lockout / Tagout products and services Contact your local Brady Distributor, or visit www.bradyid.com/lockout

Brady Worldwide, Inc.
6555 W. Good Hope Road
Milwaukee, WI 53223
1-888-272-3946
www.bradyid.com

Brady Canada
355 Apple Creek Blvd.
Markham, ON L3R 9X7
1-800-262-6179
www.bradycanada.com

WWW.BRADYID.COM/LOCKOUT



Y483783

 **BRADY**[®]
WHEN PERFORMANCE MATTERS MOST[™]

AN ISO-9001 REGISTERED FIRM © 2006 BRADY Corporation. All Rights Reserved. Specifications subject to change without notice.