



EXOCARB® AERO Blizzard®


Carbide End Mills for Aluminum Applications

List 2023

2 Flute, Regular Length, Reduced Neck, Square & Corner Radius

SPEED FEED P1220	CARBIDE	BR	REG	30°	SHANK h6
----------------------------	----------------	-----------	------------	------------	--------------------

Milling Diameter Tolerance	
1/4 ≤ D ≤ 1	+0 / -0.002"

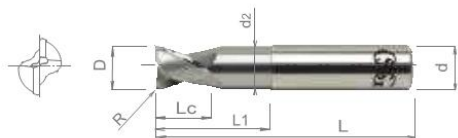

Units: Inch

EDP Number	Mill Diameter	Corner Radius	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
	D	R	L	Lc	L1	d2	d
20230100	1/4	-	2-1/2	1/4	1-1/8	0.246	1/4
20230200	1/4	0.02	2-1/2	1/4	1-1/8	0.246	1/4
20230300	1/4	0.03	2-1/2	1/4	1-1/8	0.246	1/4
20230400	1/4	0.06	2-1/2	1/4	1-1/8	0.246	1/4
20230500	1/2	-	3	1/2	1-3/8	0.496	1/2
20230600	1/2	0.02	3	1/2	1-3/8	0.496	1/2
20230700	1/2	0.03	3	1/2	1-3/8	0.496	1/2
20230800	1/2	0.06	3	1/2	1-3/8	0.496	1/2
20230900	5/8	-	3-1/2	5/8	1-5/8	0.621	5/8
20231000	5/8	0.03	3-1/2	5/8	1-5/8	0.621	5/8
20231100	5/8	0.06	3-1/2	5/8	1-5/8	0.621	5/8
20231200	5/8	0.09	3-1/2	5/8	1-5/8	0.621	5/8
20231300	3/4	-	4	3/4	2	0.746	3/4
20231400	3/4	0.06	4	3/4	2	0.746	3/4
20231500	3/4	0.09	4	3/4	2	0.746	3/4
20231600	3/4	0.12	4	3/4	2	0.746	3/4
20231700	1	-	5	1	2-5/8	0.992	1
20231800	1	0.06	5	1	2-5/8	0.992	1
20231900	1	0.09	5	1	2-5/8	0.992	1
20232000	1	0.12	5	1	2-5/8	0.992	1

Packed: 1 pc.
EDPs above are stocked standard, DLC coating available upon request.



List No.	Work Material																
	P					M			K	N		S		H			
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels			
	Low	Med.	High	4140		300	400	17-4 PH		6061	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC	50-70 HRC
2023																	

good best

