

Use this number when searching for this item:

9005900010000

Center Drill, 1mm, HSS, Uncoated



>> Item Info

EDP#	9005900010000
Series	590
Order Code	1.000
Coating	Uncoated
Coolant Through	No
Cutting Direction	RH
Material	HSS
Point Angle	118°
Shank	Straight
Туре	Center Drill

>> Features

-- I Gataroo


- relieved cone

- with re-inforced neck to provide high fracture resistance
- without protective countersink
- recess between countersink and hole for additional lubricant space
- for centre holes to DIN 332, part 1, form A

>> Suggested Materials

- Aluminum
- Alloyed Steels
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Plastic
- Hardened Steels

>> Technical Specs

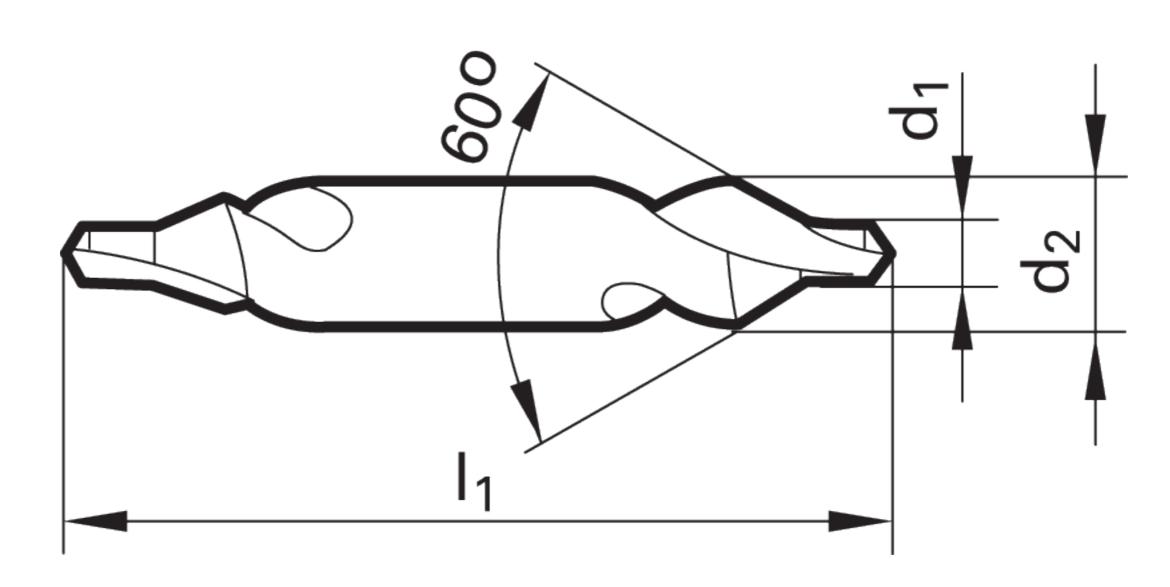

		Cut Ø	Cut Ø	Cut Ø	Cut Ø	Shank Ø	OAL	Flute Length	Drilling Depth	Drilling Depth		
EDP#	Code No.	d1	d1	d1	d1	d2	I1	12	tmax	tmax	Shank Type	Flutes
		mm	inch	frac.	wire / letter	mm	mm	mm	mm	inch		
90059000100	1.000	1.000	0.0394			3.150	31.50	7.00	5.50	0.217	Straight	2

^{***} **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.