

Use this number when searching for this item:

## 9017020115100

Drill, 29/64 3xD, RT 100 F, Carbide, TiN



### >> Item Info

EDP #	9017020115100
Series	1702
Order Code	11.510
Coating	TiN
Coolant Through	No
Cutting Direction	RH
Drilling Depth	3xD
Material	Carbide
Point Angle	140°
Shank	Straight
Type	RT 100 F
Tolerance	m7


### >> Features

- relieved cone
- main cutting edge form concave
- optimized cutting geometry
- sharp cutting edges

### >> Suggested Materials

- Aluminum
- Free Cutting Steels
- Tool Steels
- Stainless Steels
- Ti and Ti-alloys
- Cast Iron
- Brass
- Bronze
- Copper
- Magnesium
- Special Alloys
- Hardened Steels

### >> Technical Specs

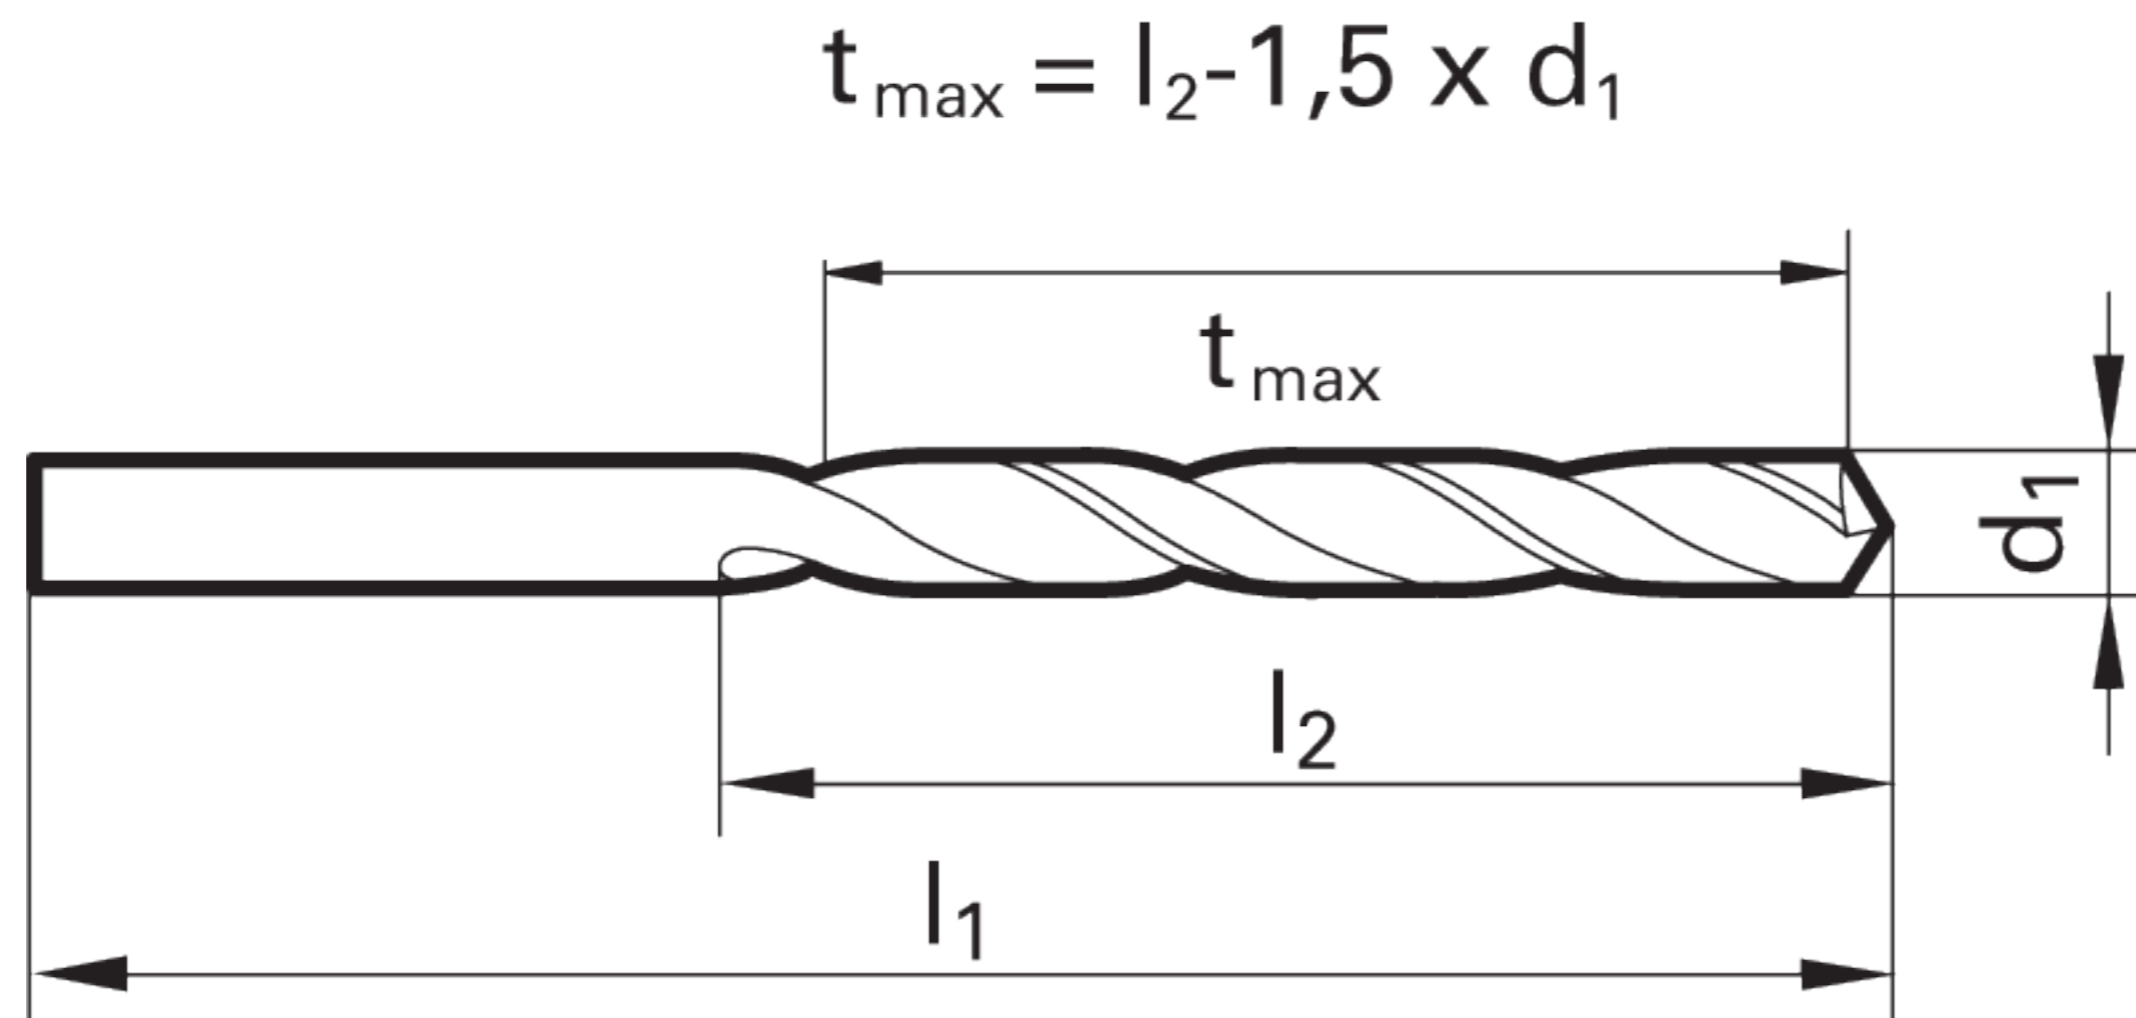

EDP #	Code No.	Cut Ø d1 mm	Cut Ø d1 inch	Cut Ø d1 frac.	Cut Ø d1 wire / letter	Shank Ø d2 mm	OAL l1 mm	Flute Length l2 mm	Drilling Depth tmax mm	Drilling Depth tmax inch	Shank Type	Flutes
9017020115100	11.510	11.510	0.4531	29/64		11.510	95.00	47.00	29.74	1.171	Straight	2



**WARNING:**  
This product contains Cobalt, a chemical known to the State of California to cause cancer. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov)

\*\*\* **DISCLAIMER:** Data on this PDF is subject to change at any time without notice.