

HY-PRO® CARB

Performance Sub-Micrograin Carbide End Mills




List HP453

4 Flute, Super Tough Mills

SPEED FEED P1243	CARBIDE	TiAIN		50°	SHANK h6
----------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
4 ≤ D ≤ 20	+0 / -0.038mm

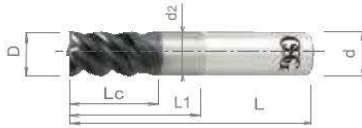

Units: mm

EDP Number	Mill Diameter	Overall Length	Length of Cut	Neck Length	Neck Diameter	Shank Diameter
TiAIN	D	L	Lc	L1	d2	d
HP453-1575	4	60	6	12	3.9	6
HP453-2362	6	60	9	18	5.9	6
HP453-3150	8	75	12	24	7.9	8
HP453-3937	10	80	15	30	9.9	10
HP453-4724	12	102	18	36	11.9	12
HP453-6299	16	110	24	48	15.9	16
HP453-7874	20	125	30	60	19.9	20

Packed: 1 pc.
Available TiAIN coating only.



List HP456

4 Flute, Super Tough Mills, Corner Radius

SPEED FEED P1243	CARBIDE	TiAIN		50°	SHANK h6
----------------------------	----------------	--------------	--	------------	--------------------

Milling Diameter Tolerance	
6 ≤ D ≤ 12	+0 / -0.038mm

