




PRODUCT DATA SHEET

Moly-Graph® Extreme Pressure Multi-Purpose Grease, 14 Wt Oz

No. SL3141 | Item# 1007866 | Case# 1007865

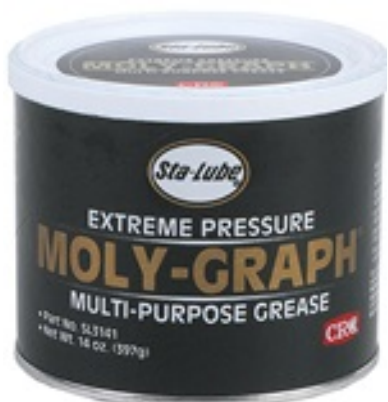

Product Description	Extreme pressure MOLY-GRAPH Multi-Purpose Grease is the best general purpose grease for a wide range of applications. It offers an excellent mechanical and shear stable Lithium 12 Hydroxy Protection of "moly" and graphite. Timken load of 40 lbs.
Applications	Automotive applications, backing plates, ball joints, chassis points, construction ball & roller bearings, idler bearings, industrial applications, mining applications, pillow block bearings, sprocket bearings, U-joints, water pumps, wheel bearings
Unit Package Description	14 Ounce Can
Brand	Sta-Lube
Generic Description 1	E. P. Multi-Purpose Lithium Grease
Net Fill	14 Wt Oz
UPC Code	072213314106
Unit Dimensions	3.44H x 4.13W x 4.13D in
Units Per Case	12
Case Dimensions	3.5H x 12.5W x 17D in
Cases Per Pallet	108
Case Weight	13 lbs
I 2 of 5 Code	30072213314107
Appearance	Dark Gray Semi-Solid to Solid Grease
Base Type	Lithium-12
Flash point (F)	>400°F
Flash point (C)	>204°C
Flammability Class - CPSC	None
Spec Gravity Concentrate	0.9 at 60°F
NLGI Grade	2
Timken OK Load Lbs.	45 Lbs Min
Plastic Safe	Not Determined

Last revised: 11/30/2017
Page 1 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com


CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.



PRODUCT DATA SHEET

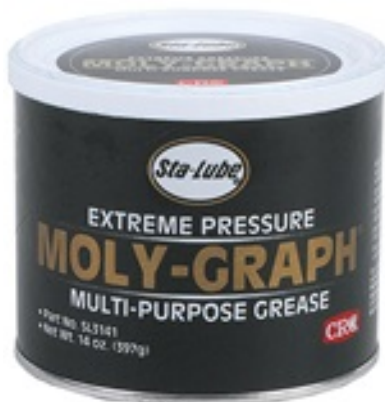

Evaporation Rate	<0.01 (Butyl Acetate=1)
Working Temp (F)	-25 to 250°F
Working Temp (C)	-31.7 to 121°C
4 Ball EP	30 LWI, 250 KG Weld
4 Ball Wear	0.6 mm typical
Drop Point	350°F
Elastomer Compatibility	0 to 40% vol ; 0 to 15 hard
Leakage	5
Oil Separation	10
Oxidation Stability	5
Pour Point (F)	0°F
Pour Point (C)	-17.8°C
ISO Viscosity Grade	165
Water Washout	10
Worked Penetration	265 to 295
Propellant	None
DOT Proper Shipping Name	Not Regulated
VOC % (Consumer Product def)	0.2
VOC g/L (Consumer Product def)	1.8
VOC lbs/gal (Consumer Prod def)	0.015
VOC Category	Not Regulated
Removal (How To)	Remove with a degreaser or brake cleaner product.

Last revised: 11/30/2017
Page 2 of 2



Customer Care: 800-556-5074
Technical Assistance: 800-521-3168
www.crcindustries.com

CRC Industries is a worldwide leader in the production of specialty chemicals for maintenance and repair professionals serving industrial, electrical, aviation, automotive and marine markets. CRC is ISO 9001:2008 certified and adheres to the strictest guidelines for quality in all facets of research, development and production.



CRC®, K&W®, Sta-Lube®, Marykate® and products denoted with ® and ™ are trademarks of CRC Industries, Inc.