


List 452, 454

2, or 4 Flute, Plus Tolerance

SPEED FEED P1261-1267	CARBIDE	TiAlN	BR		30°
---------------------------------	----------------	--------------	-----------	---	------------

Milling Diameter Tolerance	
1/16 ≤ D ≤ 1	+0.001" / -0

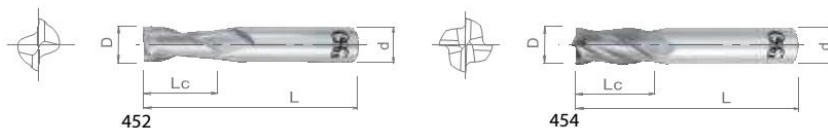

Units: Inch

EDP Number			Mill Diameter	Overall Length	Length of Cut	Shank Diameter
List 452 (2 Flute)		List 454 (4 Flute)				
Bright	TiAlN	Bright	D	L	Lc	d
452-0625	-	454-0625	1/16	1-1/2	3/16	1/8
452-0938	-	454-0938	3/32	1-1/2	5/16	1/8
452-1250	-	454-1250	1/8	1-1/2	1/2	1/8
452-1562	-	454-1562	5/32	2	9/16	3/16
452-1875	-	454-1875	3/16	2	5/8	3/16
452-2188	-	454-2188	7/32	2-1/2	5/8	1/4
452-2500	452-250011	454-2500	1/4	2-1/2	3/4	1/4
452-2812	-	454-2812	9/32	2-1/2	3/4	5/16
452-3125	-	454-3125	5/16	2-1/2	13/16	5/16
452-3750	-	454-3750	3/8	2-1/2	1	3/8
452-4375	-	454-4375	7/16	2-3/4	1	7/16
452-5000	-	454-5000	1/2	3	1	1/2
452-5625	-	454-5625	9/16	3-1/2	1-1/8	9/16
452-6250	-	454-6250	5/8	3-1/2	1-1/4	5/8
452-6875	-	454-6875	11/16	4	1-3/8	3/4
452-7500	-	454-7500	3/4	4	1-1/2	3/4
452-1000	-	454-1000	1	4	1-1/2	1

Packed: 1 pc.
EDP's listed above are stocked standard, other coatings available upon request.
Specify treatment at time of order.



Work Material

Chart applies to all list numbers above	P					M			K	N		S		H				
	Carbon Steels			Alloy Steels	Die Steels	Stainless Steels			Cast Iron	Aluminum		Nickel Alloy	Titanium	Hardened Steels				
	Low	Med.	High	4140		4340	300	400		17-4 PH	6061	7075	Casting	Inconel	6Al4V (30 HRC)	~35 HRC	35-45 HRC	45-50 HRC
-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

good best

