



# SPECIFICATION SHEET

## 267-HPR310

### 3 FLANGE EAR PLUGS - UNCORDED

- Pre-formed plug shape with no rolling required makes insertion simple
- Self-sealing flanges give all day comfort
- Rigid stem makes insertion easy and reduces the risk of contamination
- Can be reused several times, making them very cost efficient
- Moderate attenuation allows for safe usage that blocks out hazardous noise yet allows warning signals and voices to be clearly understood

### APPLICATIONS

- Manufacturing
- Workshops
- Construction
- Dirty environments

### WEARER INFORMATION


- To avoid pain and/or damages to the ear canal/eardrum, remove the ear plug with a slow and gentle twist while removing it from the ear canal.
- Wear the plugs during the entire noise exposure.
- After use, clean and disinfect the plugs with mild soap and warm water. Let plugs dry before reuse.
- Store the plugs in a way that protects them from dirt, grease, etc.
- The ear plugs should be regularly inspected for serviceability.
- This product may be adversely affected by certain chemical substances. Further information should be sought from the manufacturer.
- Please ensure that the ear plugs are fitted, adjusted and maintained in accordance with the instructions. If instructions are not followed, the protection may be severely impaired.
- When fitted with a connecting cord, these ear plugs should not be used where there is a risk that the cord could be caught up during use.

### TECHNICAL DATA

MATERIAL	TPR (thermoplastic rubber)
COLOR	Orange
NRR	25 dB
CORD TYPE	Uncorded
STYLE	Reusable
SHAPE	Self-Sealing Flanges
SIZE	One size fits most
PACKAGING	1 pair per poly bag; 200 pair per dispenser box; 10 boxes per case
CASE	28.35" x 11.61" x 10.24" / 72cm x 29.5cm x 26cm
CASE WEIGHT	12.1lbs / 5.5kg
COO	Taiwan

### BARCODES

ITEM	BAG	BOX	CASE
267-HPR310	---	616314293689	20616314293683

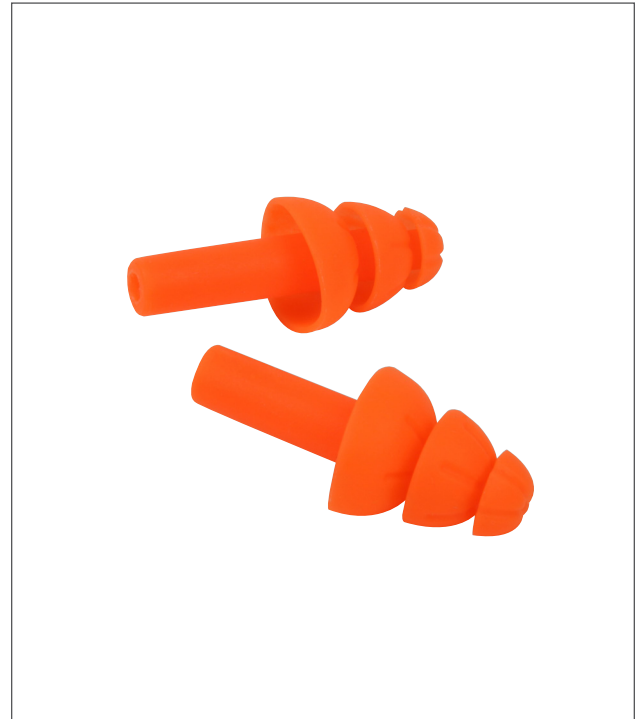

### INFORMATION REQUIRED BY THE EPA.

The level of noise entering a person's ear, when hearing protection is worn as directed, is closely approximated by the difference between the A-weighted environmental level and the NRR.

- EXAMPLE:**
1. The environmental noise level at the ear is 92 dB(A)
  2. The NRR is 25 decibels (dB)
  3. The level of noise entering the ear is approximately equal to 67 dB(A)

**CAUTION:** For noise environments dominated by frequencies below 500 Hz, the C-weighted environmental noise level should be used. Improper fit of this device will reduce its effectiveness in attenuating noise. Plugs should be inserted with a gentle rocking, twisting motion while opposite hand is opening ear canal by pulling top of ear. Although hearing protectors can be recommended for protection against the harmful effects of impulse noise, the Noise Reduction Rating (NRR) is based on the attenuation of continuous noise and may not be an accurate indicator of the protection attainable against impulse noise, such as gunfire.

### ATTENUATION DATA

FREQUENCY HZ	125	250	500	1000	2000	3150	4000	6300	8000	NRR
Mean Attenuation dB	31.3	28.6	31.9	32.5	36.2	40.4	40.7	44.0	43.9	25 dB
Standard Deviation dB	3.6	3.6	4.0	3.0	4.1	3.8	3.1	3.2	3.3	

Tested in accordance with ANSI standard S3.19-1974

Canada Class A (L)

**PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®**

AMERICAS: (800) 262-5755 • (518) 861-0133 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | [www.pipglobal.com](http://www.pipglobal.com)

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED.