

# TRIM<sup>®</sup> MicroSol<sup>®</sup> 465

## Low-foam Semisynthetic

TRIM MicroSol 465 low-foam semisynthetic microemulsion coolant is optimized for high-volume cast iron, ferrous, and some aluminum and nonferrous metalworking operations. MicroSol 465 prevents leaching of elemental iron and eliminates clinkering and oxidation of ferrous micro fines.

Delivering extended sump life, machine-friendly MicroSol 465 provides excellent, cost-effective cooling. Make a difference to your bottom line with MicroSol 465.

**Industrial Fluid Solutions Expands Customer Offerings with TRIM<sup>®</sup> MicroSol<sup>®</sup> Products**



*Wisconsin-based Industrial Fluid Solutions is a metalworking fluid distributor and fluid maintenance service provider that sells to CNC machine shops, die casting companies, mold makers, and heavy equipment manufacturers. Their customers range from small metalworking shops to large equipment and component suppliers in the midwest.*



### Choose MicroSol 465:

- Easy to maintain and hard water stable
- Low foaming for today's demanding high-pressure, high-volume applications
- Also for machining some aluminum alloys and nonferrous metals
- Provides superior corrosion inhibition on cast iron and eliminates "hot chip" and clinkering problems
- Keeps machines very clean while leaving a soft fluid film for ease of cleaning and reduced maintenance
- Requires no special disposal or recycling

### MicroSol 465 especially for:

**Applications** — grinding, high-pressure, high-volume, machining, milling, slab milling, and turning

**Metals** — aluminum, cast iron, and ferrous metals

**Industries** — automotive and general industry

**MicroSol 465 is free of** — boron, chlorine, DEA, and sulfur

# TRIM<sup>®</sup> MicroSol<sup>®</sup> 465

## Low-foam Semisynthetic



### Application Guidelines

- Running at or above 7.5% offers the best sump life and corrosion inhibition on cast iron chips.
- Not recommended for use on very reactive metals such as magnesium.
- For additional product application information, including performance optimization, please contact your Master Fluid Solutions' Authorized Distributor at <https://www.masterfluids.com/na/en-us/distributors/index.php>, your District Sales Manager, or call our Tech Line at 1-800-537-3365.


### Physical Properties Typical Data

|                                         |                       |
|-----------------------------------------|-----------------------|
| Color (Concentrate)                     | Light yellow to amber |
| Color (Working Solution)                | Translucent           |
| Odor (Concentrate)                      | Mild                  |
| Form (Concentrate)                      | Liquid                |
| Flash Point (Concentrate) (ASTM D93-08) | > 212°F               |
| pH (Concentrate as Range)               | 9.9 - 10.9            |
| pH (Typical Operating as Range)         | 8.9 - 10.4            |
| Coolant Refractometer Factor            | 2.0                   |
| Titration Factor (CGF-1 Titration Kit)  | 0.92                  |
| Digital Titration Factor                | 0.0400                |
| V.O.C. Content (ASTM E1868-10)          | 107 g/l               |

### Recommended Metalworking Concentrations


|                            |              |
|----------------------------|--------------|
| Light Duty                 | 5.0% - 6.5%  |
| Moderate Duty              | 6.5% - 8.5%  |
| Heavy Duty                 | 8.5% - 10.0% |
| Design Concentration Range | 5.0% - 10.0% |

### Concentration by % Brix

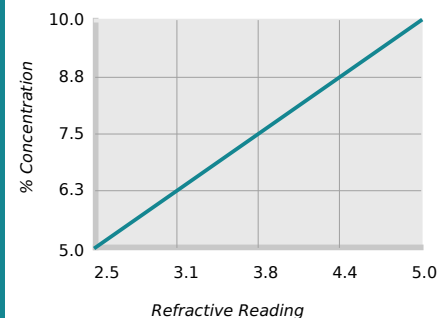

% Concentration = Refractive Reading x Refractive Factor  
Coolant Refractometer Factor % Brix = 2.0

### Concentration by Titration

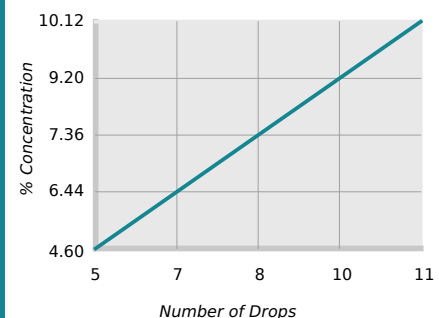

% Concentration = No. of Drops x Titration Factor  
Titration Factor = 0.92

### Health and Safety

Request SDS



# TRIM<sup>®</sup> MicroSol<sup>®</sup> 465

## Low-foam Semisynthetic




### Mixing Instructions

- Recommended usage concentration in water: 5.0% - 10.0%.
- To help ensure the best possible working solution, add the required amount of concentrate to the required amount of water (never the reverse) and stir until uniformly mixed.
- Use premixed coolant as makeup to improve coolant performance and reduce coolant purchases. The makeup you select should balance the water evaporation rate with the coolant carryout rate. Use our Coolant Makeup Calculator to find the best ratio for your machine: [apps.masterfluids.com/makeup/](https://apps.masterfluids.com/makeup/).
- Use mineral-free water to improve sump life and corrosion inhibition while reducing carryoff and concentrate usage.



1-gallon jug  
SKU: MS465-1G  
UPC-12: 641238082675



5-gallon pail  
SKU: MS465-5G  
UPC-12: 641238082699



54-gallon drum  
SKU: MS465-54G  
UPC-12: 641238082705



270-gallon tote  
SKU: MS465-270G  
UPC-12: 641238082712

### Additional Information

- Use Master STAGES<sup>™</sup> Whamex<sup>™</sup> for a quick and thorough precleaning of your machine tool and coolant system.
- Consult Master Fluid Solutions before using on any metals or applications not specifically recommended.
- This product should not be mixed with other metalworking fluids or metalworking fluid additives, except as recommended by Master Fluid Solutions, as this may reduce overall performance, result in adverse health effects, or damage the machine tool and parts. If contamination occurs, please contact Master Fluid Solutions for recommended action.
- TRIM<sup>®</sup> and MicroSol<sup>®</sup> are registered trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- Master STAGES<sup>™</sup> and Whamex<sup>™</sup> are trademarks of Master Chemical Corporation d/b/a Master Fluid Solutions.
- The information herein is given in good faith and believed current as of the date of publication and should apply to the current formula version. Because conditions of use are beyond our control, no guarantee, representation, or warranty expressed or implied is made. Consult Master Fluid Solutions for further information. For the most recent version of this document, please go to this URL:

[https://2trim.us/di/?i=na\\_en-us\\_MS465](https://2trim.us/di/?i=na_en-us_MS465)

